

1115

VIXO



## SPECIFICATIONS:

0.8 kg	CRI 82+ 3K AND 4K	CRI 70+ 5K	Rot 355°	Tilt 90°	Class I	SELV	IP54	CE	Available	5 Year warranty	Made in Australia
--------	----------------------	---------------	----------	----------	---------	------	------	----	-----------	-----------------	-------------------

## CONSTRUCTION &amp; DESIGN

- Track mounted LED adjustable spotlight
- Constructed in cast aluminium alloy and finished in durable polyester powdercoat paint
- Fully adjustable design with 355° rotation and 90° tilt
- Clear tempered sealed glass
- Suitable with GAMMA SERIES 25, 3-Circuit Track System. Also compatible with many common European 3-Circuit Tracks

## OPTICAL &amp; THERMAL PERFORMANCE

- Reflector and integrated heatsink provides premium optical and thermal performance
- Efficient optical control in various beam angles with no harsh cut off and ultra low glare

## ELECTRICAL SYSTEM

- Supplied standard with an integral leading and trailing edge mains dimmable driver. 13W and 22W only. (See dimming options below)
- Optional DALI, Switch Dim or DSI dimmable driver. Requires remote DC DALI 48V power supply. (Refer to order codes below)
- Power factor > 0.9 with active power factor correction
- Input voltage 220-240V, 50/60 Hz or 48V DC
- 240V Input voltage model is Class I. 48V Input voltage model is Class III




## TECHNICAL PERFORMANCE

- 13W, 14W or 22W total system power consumption with overload and short circuit protection
- >65,000 hours lifespan (L70)
- Premium quality LED Module with high lumen output per watt
- Chromaticity tolerance (MacAdam step) - 2
- Available in 3K, 4K or 5K colour temperature with low colour shift over time

## CODE ORDERING GUIDE:


PRODUCT CODE / DIM CODE - COLOUR CODE

Example: 1115-SP-3K-13W-03 or 1115-SP-3K-13W/DALI-03

SYSTEM POWER	COLOUR TEMP.	 24° SP	 36° FL	 55° VWFL	HOT LED LUMENS	LUMINAIRE LUMEN OUTPUT		
		PRODUCT CODE				SP	FL	VWFL
13W	3K	1115-SP-3K-13W	1115-FL-3K-13W	1115-VWFL-3K-13W	1519	1214	1208	1198
	4K	1115-SP-4K-13W	1115-FL-4K-13W	1115-VWFL-4K-13W	1607	1275	1268	1261
	5K	1115-SP-5K-13W	1115-FL-5K-13W	1115-VWFL-5K-13W	1646	1245	1238	1232
14W	3K	1115-SP-3K-14W	1115-FL-3K-14W	1115-VWFL-3K-14W	1746	1380	1373	1361
	4K	1115-SP-4K-14W	1115-FL-4K-14W	1115-VWFL-4K-14W	1848	1439	1431	1423
	5K	1115-SP-5K-14W	1115-FL-5K-14W	1115-VWFL-5K-14W	1803	1408	1400	1394
22W	3K	1115-SP-3K-22W	1115-FL-3K-22W	1115-VWFL-3K-22W	2414	1945	1939	1898
	4K	1115-SP-4K-22W	1115-FL-4K-22W	1115-VWFL-4K-22W	2584	2043	2036	1998
	5K	1115-SP-5K-22W	1115-FL-5K-22W	1115-VWFL-5K-22W	2618	1995	1988	1951

DIM CODE		13W	14W	22W
/DALI	Dali Dimming / Switch Dim	x	✓	✓
/DSI	Digital Dimming	x	✓	✓
	Leading & Trailing edge	Std	x	Std

COLOUR CODE		
-03		Texture White
-07		Texture Black
-11		Texture Silver

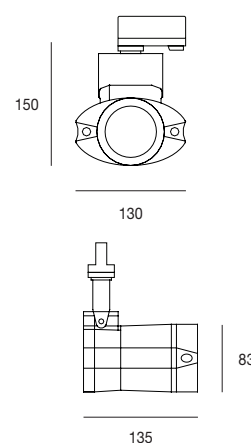

## REMOTE POWER SUPPLY (FOR /DALI &amp; /DSI)

PRODUCT CODE	Units per power supply	
	14W	22W
DCDALI48V75W	6	4
DCDALI48V150W	12	8