

# ELECTRICAL DESIGN GROUP

ELECTRICAL BUILDING SERVICES CONSULTANTS

P.O. Box 15, SHERWOOD Q. 4075

Phone: (07) 3278 4375 Fax: (07) 3716 0222

Web Site: www.edg.net.au Email: brisbane@edg.net.au

C3328a - ORMISTON COLLEGE - CLI

C3328a-0001(L).xls


## ELECTRICAL SERVICES CONTRACT DOCUMENT SCHEDULE

REVISION L - 04 AUGUST 2025

ISSUING INFORMATION				DATE OF ISSUE							
	DAY	20	04								
	MONTH	06	08								
	YEAR	25	25								
	REASON FOR ISSUE	C	C								
A = APPROVAL C = CONSTRUCTION N = INFORMATION P = PRELIMINARY T = TENDER											

DISTRIBUTION				NUMBER OF COPIES							
WWW.EDG.NET.AU				1E	1E						
ROHRIG CONSTRUCTIONS				1E	1E						
ORMISTON COLLEGE				1E	1E						
P = PRINT T = TRACING D = DISC E = EMAIL F = FAX											

DOCUMENTS		REVISION									
C3328a-E01.dwg	LEGEND	E	F								
C3328a-E02.dwg	NO LONGER REQUIRED	-									
C3328a-E03.dwg	BUILDING LANDSCAPE PLAN	B									
C3328a-E04.dwg	GROUND FLOOR PLAN	D	E								
C3328a-E05.dwg	GROUND FLOOR REFLECTED CEILING PLAN	G	H								
C3328a-E06.dwg	FIRST FLOOR PLAN	D	E	F							
C3328a-E07.dwg	FIRST FLOOR REFLECTED CEILING PLAN	F	G								
C3328a-E08.dwg	CANTEEN KITCHEN FLOOR PLAN	E	F								
C3328a-E09.dwg	NO LONGER REQUIRED	-									
C3328a-E10.dwg	SCHEMATICS & DETAILS	B									
C3328a-0001.xls	CONTRACT DOCUMENT SCHEDULE	J	K	L							
C3328a-0002.xls	EQUIPMENT SCHEDULE	C	D								
C3328a-0005.xls	ABBREVIATIONS SCHEDULE	A									
C3328a-0006.xls	DISTRIBUTION BOARD DB-A SCHEDULE	C									
C3328a-0007.xls	DISTRIBUTION BOARD DB-B SCHEDULE	C									
C3328a-0008.xls	DISTRIBUTION BOARD DB-C SCHEDULE	B									
C3328a-0009.xls	DISTRIBUTION BOARD DB-D SCHEDULE	B									
C3328a-0019.doc	MOBILE PHONE BOOSTER SYSTEM SCOPE	B									
C3328a-0020.doc	AV SYSTEM SCOPE	B									
C3328a-0021.doc	VIDEO SYSTEM SCOPE	A									
C3328a-0001.doc	ELECTRICAL SERVICES SPECIFICATION	C									

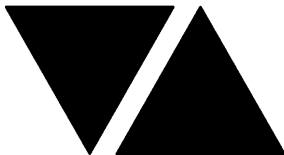

# ELECTRICAL DESIGN GROUP

ELECTRICAL BUILDING SERVICES CONSULTANTS

P.O. Box 15, SHERWOOD Q. 4075

Phone: (07) 3278 4375 Fax: (07) 3716 0222


Web Site: [www.edg.net.au](http://www.edg.net.au) Email: [brisbane@edg.net.au](mailto:brisbane@edg.net.au)

**C3328a - ORMISTON COLLEGE - CLI**  
**ELECTRICAL EQUIPMENT SCHEDULE**  
**REVISION D - 20 JUNE 2025**

**C3328a-0002(D).xls**

THE LIGHT FITTING SUPPLIER CONTACT DETAILS MAY BE AVAILABLE ON THE EDG WEBSITE VIA THE FOLLOWING LINK  
[www.edg.net.au/Links/Lighting.htm](http://www.edg.net.au/Links/Lighting.htm)

TYPE	LAMPS	DESCRIPTION	COLOUR / ACCESSORY	CATALOGUE No	REV
L1	14W 4000K LED	RECESSED 600 X 300 FLAT PLATE LED FITTING C/W REMOTE DRIVER AND A RECESS KIT	WHITE TRIM	EQUAL TO GAMMA ILLUMINATION AXIS 1550-4K-14W C/W FLUSH RECESS PB KIT	A
L2	34W 4000K LED	RECESSED 1200 X 300 FLAT PLATE LED FITTING C/W REMOTE DRIVER AND A RECESS KIT	WHITE TRIM	EQUAL TO GAMMA ILLUMINATION AXIS 1549-4K-34W C/W FLUSH RECESS PB KIT	A
L3	34W 4000K LED	600 X 600 T BAR LAY IN FLAT PLATE LED FITTING C/W REMOTE DRIVER	WHITE TRIM	EQUAL TO GAMMA ILLUMINATION AXIS G3 1548- 4K-34W	A
L4	36W LED 4000K	1200 LONG SURFACE MOUNTED BATTEN C/W INTEGRAL DRIVER	GREY	EQUAL TO GAMMA STORM 1558-CCT-36W	A
L5	NO LONGER REQUIRED				B
L6	8W 4000K LED	RECESSED 47 DEG BEAM DOWNLIGHT C/W REMOTE DRIVER	WHITE TRIM	GAMMA MYLO 1004-WFL-4K-8W	A
L7	28W 4000K LED	RECESSED 32 DEG BEAM DOWNLIGHT C/W REMOTE DRIVER	WHITE TRIM	GAMMA COBALT 1406-4K	A
L8	22W 4000K LED	RECESSED 32 DEG BEAM DOWNLIGHT C/W REMOTE DRIVER	WHITE TRIM	GAMMA COBALT 1405-4K	A
L9	NO LONGER REQUIRED				B
L10	28W 4000K LED	RECESSED SQUARE ADJUSTABLE 47 DEG BEAM DOWNLIGHT C/W REMOTE DRIVER	BLACK TRIM	GAMMA LEPLEX 1080-WFL-4K	A
L11	22W 4000K LED	RECESSED SQUARE 47 DEG BEAM DOWNLIGHT C/W REMOTE DRIVER	BLACK TRIM	GAMMA QUAD 1077-4K-22W	A
L12	22W 4000K LED	RECESSED 55 DEG BEAM ADJUSTABLE DOWNLIGHT C/W REMOTE DRIVER	WHITE	GAMMA CORBEL 1413-4K-22W	B
L13	28W 4000K LED	RECESSED SQUARE ADJUSTABLE 47 DEG BEAM DOWNLIGHT C/W REMOTE DRIVER	SILVER	GAMMA LEPLEX 1080-WFL-4K	A

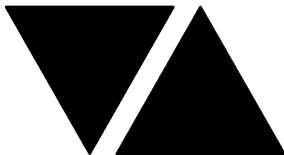

# ELECTRICAL DESIGN GROUP

ELECTRICAL BUILDING SERVICES CONSULTANTS

P.O. Box 15, SHERWOOD Q. 4075

Phone: (07) 3278 4375 Fax: (07) 3716 0222


Web Site: [www.edg.net.au](http://www.edg.net.au) Email: [brisbane@edg.net.au](mailto:brisbane@edg.net.au)

C3328a - ORMISTON COLLEGE - CLI  
ELECTRICAL EQUIPMENT SCHEDULE  
REVISION D - 20 JUNE 2025

C3328a-0002(D).xls

THE LIGHT FITTING SUPPLIER CONTACT DETAILS MAY BE AVAILABLE ON THE EDG WEBSITE VIA THE FOLLOWING LINK  
[www.edg.net.au/Links/Lighting.htm](http://www.edg.net.au/Links/Lighting.htm)

TYPE	LAMPS	DESCRIPTION	COLOUR / ACCESSORY	CATALOGUE No	REV
L14	28W 4000K LED	RECESSED SQUARE ADJUSTABLE 47 DEG BEAM DOWNLIGHT C/W REMOTE DRIVER	WHITE	GAMMA LEPLEX 1080-WFL-4K	A
L15	45W 3000K LED	RECESSED DOWNLIGHT C/W REMOTE DRIVER	BLACK TRIM	GAMMA CENTRIX 1208-WFL-3K	A
L16	NO LONGER REQUIRED				B
L17	13W 4000K LED	RECESSED 55 DEG BEAM DOWNLIGHT C/W REMOTE DRIVER	WHITE TRIM	GAMMA MYLO 1004-VWFL-4K-13W	A
L18	13W 4000K LED	RECESSED 55 DEG BEAM DOWNLIGHT C/W REMOTE DRIVER	WHITE	GAMMA COBALT 1402-4K-13W	A
L19	13W 4000K LED	RECESSED 55 DEG BEAM DOWNLIGHT C/W REMOTE DRIVER	WHITE TRIM	GAMMA COBALT 1401-4K-13W	A
L20	NO LONGER REQUIRED				B
L21	NO LONGER REQUIRED				B
L22		INCUBATOR PENDANT			B
L23	4000K LED 3000 LUMEN / M	SURFACE EXTRUSION C/W OPAL DIFFUSER AND INTERNAL DRIVER REFER TO DRAWING FOR LENGTHS	WHITE	KLIK SYSTEMS 110 BEAM OPTEK	A
L24	3000K LED 2250LM / M	SURFACE MOUNTED ALUMINIUM EXTRUSION 66 HIGH X 66 WIDE C/W OPAL DIFFUSER AND INTEGRAL DRIVER	BLACK	KLIK SYSTEMS 65 LED	B
L25	NO LONGER REQUIRED				B
L26		LOUNGE PENDANT			B
L27	NO LONGER REQUIRED				B

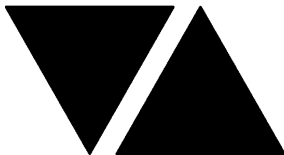

# ELECTRICAL DESIGN GROUP

ELECTRICAL BUILDING SERVICES CONSULTANTS

P.O. Box 15, SHERWOOD Q. 4075

Phone: (07) 3278 4375 Fax: (07) 3716 0222


Web Site: [www.edg.net.au](http://www.edg.net.au) Email: [brisbane@edg.net.au](mailto:brisbane@edg.net.au)

C3328a - ORMISTON COLLEGE - CLI  
ELECTRICAL EQUIPMENT SCHEDULE  
REVISION D - 20 JUNE 2025

C3328a-0002(D).xls

THE LIGHT FITTING SUPPLIER CONTACT DETAILS MAY BE AVAILABLE ON THE EDG WEBSITE VIA THE FOLLOWING LINK  
[www.edg.net.au/Links/Lighting.htm](http://www.edg.net.au/Links/Lighting.htm)

TYPE	LAMPS	DESCRIPTION	COLOUR / ACCESSORY	CATALOGUE No	REV
L28 A		NO LONGER REQUIRED			B
L28 B		NO LONGER REQUIRED			B
L28 C		NO LONGER REQUIRED			B
L29	4000K LEDS	PROVIDE THE L29 AS A SINGLE RUN OF LED STRIP LIGHTS SCREW FIXED IN PLACE UNDER THE OVERHEAD CUPBOARDS AGAINST THE SPLASH BACK TO ILLUMINATE DOWN THE WALL AS PER THE ARCHITECTURAL JOINERY DETAIL. PROVIDE A REMOTE DRIVER LOCATED IN AN ACCESSIBLE POSITION. THE SUPPLIER IS TO CUT / JOIN THE LED STRIPS TO SUIT THE SITE DIMENSIONS. DO NOT CUT THE LED STRIPS ON SITE SCREW FIX THE EXTRUSION IN PLACE		NEON PRODUCTS AUSTRALIA PR-LIN-172153 WITH FROSTED DIFFUSER + LEDs = LF-DFB-NW-300-12	A
L30	28W 3000K LED	BOLLARD IP54 LIGHT C/W INTEGRAL DRIVER AND CONCRETE FOOTING	BLACK	GAMMA MEKO 1362-3K	A
L31	41W 4000K LED	4M HIGH 100 DIA GALVANISED POLE TO MATCH THE EXISTING	TO MATCH THE EXISTING	LIGMAN ANESTI AN-20595	A
L32	41W 4000K LED	4M HIGH 100 DIA GALVANISED POLE TO MATCH THE EXISTING	TO MATCH THE EXISTING	LIGMAN ANESTI AN-20595	A
L33		NO LONGER REQUIRED			B
L34		NO LONGER REQUIRED			D
L35		NO LONGER REQUIRED			D
L36	4W 3000K LED	WALL MOUNTED DOWN LIGHT IP54 C/W INTEGRAL DRIVER MOUNT ON THE LOWER CONCRETE AWNING	BLACK	GAMMA PEPPER 1124-3K	A
L37	35W 3000K LED	ADJUSTABLE 24 DEG IP54 EXTERNAL SPOTLIGHT C/W INTEGRAL DRIVER MOUNTED ON THE HORIZONTAL STRUCTURE SUPPORTING THE DECORATIVE SCREEN	BLACK	GAMMA FYZZ 1061-SP-3K-35W	A

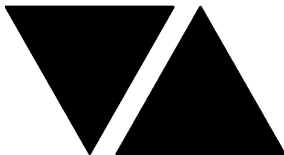

# ELECTRICAL DESIGN GROUP

ELECTRICAL BUILDING SERVICES CONSULTANTS

P.O. Box 15, SHERWOOD Q. 4075

Phone: (07) 3278 4375 Fax: (07) 3716 0222

Web Site: [www.edg.net.au](http://www.edg.net.au) Email: [brisbane@edg.net.au](mailto:brisbane@edg.net.au)

C3328a - ORMISTON COLLEGE - CLI


C3328a-0002(D).xls

## ELECTRICAL EQUIPMENT SCHEDULE

REVISION D - 20 JUNE 2025

THE LIGHT FITTING SUPPLIER CONTACT DETAILS MAY BE AVAILABLE ON THE EDG WEBSITE VIA THE FOLLOWING LINK  
[www.edg.net.au/Links/Lighting.htm](http://www.edg.net.au/Links/Lighting.htm)

TYPE	LAMPS	DESCRIPTION	COLOUR / ACCESSORY	CATALOGUE No	REV
L38	4000K LEDS	PROVIDE THE L38 AS A SINGLE RUN OF LED STRIP LIGHTS WITHIN AN ALUMINIUM EXTRUSION SCREW FIXED IN PLACE CENTRALLY WITHIN THE STRUCTURAL CHANNEL AS PER THE ARCHITECTURAL DETAIL TO ILLUMINATE DOWN. PROVIDE A REMOTE DRIVER LOCATED IN AN ACCESSIBLE POSITION. THE SUPPLIER IS TO CUT / JOIN THE LED STRIPS TO SUIT THE SITE DIMENSIONS. DO NOT CUT THE LED STRIPS ON SITE SCREW FIX THE EXTRUSION IN PLACE POWDER COATED BLACK		NEON PRODUCTS AUSTRALIA PR-LIN-172153 WITH FROSTED DIFFUSER + LEDs = LF-DFB-NW-300-12 BLACK	A
L39	4000K LEDS	PROVIDE THE L39 AS A SINGLE RUN OF LED STRIP LIGHTS WITHIN AN ALUMINIUM EXTRUSION SCREW FIXED IN PLACE ON THE UNDERSIDE OF THE LOWER AWNING STRUCTURE AS PER THE ARCHITECTURAL DETAIL TO ILLUMINATE DOWN. PROVIDE A REMOTE DRIVER LOCATED IN AN ACCESSIBLE POSITION. THE SUPPLIER IS TO CUT / JOIN THE LED STRIPS TO SUIT THE SITE DIMENSIONS. DO NOT CUT THE LED STRIPS ON SITE SCREW FIX THE EXTRUSION IN PLACE		NEON PRODUCTS AUSTRALIA PR-LIN-172153 WITH FROSTED DIFFUSER + LEDs = LF-DFB-NW-300-12	A
L40	45W 4000K LED	1200 LONG SURFACE MOUNTED BATTEN C/W INTEGRAL DRIVER. WALL MOUNT THE FITTING HORIZONTALLY AT 2700 AFFL	NA	GAMMA STORM 1311-4K	A
L41	22W 4000K LED	RECESSED SQUARE ADJUSTABLE 55 DEG BEAM DOWNLIGHT C/W REMOTE DRIVER	WHITE	GAMMA RIGA 1057-VEFL-4K-22W	A
L42x	640 LUMEN 4000K LED	SURFACE MOUNTED IP66 EXTRUSION FIXED TO THE UNDERSIDE OF THE WALKWAY STRUCTURE AS PER THE ARCHITECTURAL DETAIL. INTEGRAL DRIVER ALL EXPOSED CONDUIT IS TO BE MINIMISED AND BE PROVIDED AS GALVANISED STEEL COLOURED BLACK. REFER TO THE ARCHITECTURAL DETAILS FOR THE POSITIONS OF THE CONDUITS. EACH L42 IS A DIFFERENT LENGTH WHICH IS TO BE CONFIRMED BY THE ARCHITECT	MATT BLACK	HAWKO 120 VANDAL	A
L43	28W 4000K LED	RECESSED 32 DEG BEAM DOWNLIGHT C/W REMOTE DRIVER	WHITE TRIM	GAMMA COBALT 1406-4K	A
L44	3000K LEDS	PROVIDE THE L44 AS A SINGLE RUN OF LED STRIP LIGHTS WITHIN AN ALUMINIUM EXTRUSION POWDER COATED BLACK SCREW FIXED IN PLACE ON THE UNDERSIDE OF THE LOWER AWNING STRUCTURE AS PER THE ARCHITECTURAL DETAIL TO ILLUMINATE DOWN. PROVIDE A REMOTE DRIVER LOCATED IN AN ACCESSIBLE POSITION. THE SUPPLIER IS TO CUT / JOIN THE LED STRIPS TO SUIT THE SITE DIMENSIONS. DO NOT CUT THE LED STRIPS ON SITE		NEON PRODUCTS AUSTRALIA PR-LIN-172153 WITH FROSTED DIFFUSER + LEDs = LF-DFB-WW-300-12	A
L45	22W 4000K LED	RECESSED 55 DEG BEAM ADJUSTABLE DOWNLIGHT C/W REMOTE DRIVER	BLACK TRIM	GAMMA CORBEL 1413-4K-22W	A
L46	22W 4000K LED	RECESSED 32 DEG BEAM DOWNLIGHT C/W REMOTE DRIVER	BLACK TRIM	GAMMA COBALT 1405-4K	A
L47	13W 4000K LED	RECESSED 55 DEG BEAM DOWNLIGHT C/W REMOTE DRIVER	BLACK TRIM	GAMMA MYLO 1004-VWFL-4K-13W	A

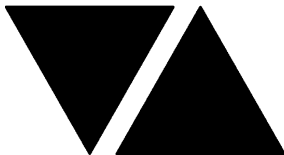

# ELECTRICAL DESIGN GROUP

ELECTRICAL BUILDING SERVICES CONSULTANTS

P.O. Box 15, SHERWOOD Q. 4075

Phone: (07) 3278 4375 Fax: (07) 3716 0222


Web Site: [www.edg.net.au](http://www.edg.net.au) Email: [brisbane@edg.net.au](mailto:brisbane@edg.net.au)

C3328a - ORMISTON COLLEGE - CLI  
ELECTRICAL EQUIPMENT SCHEDULE  
REVISION D - 20 JUNE 2025

C3328a-0002(D).xls

THE LIGHT FITTING SUPPLIER CONTACT DETAILS MAY BE AVAILABLE ON THE EDG WEBSITE VIA THE FOLLOWING LINK  
[www.edg.net.au/Links/Lighting.htm](http://www.edg.net.au/Links/Lighting.htm)

TYPE	LAMPS	DESCRIPTION	COLOUR / ACCESSORY	CATALOGUE No	REV
L48	45W 3000K LED	RECESSED DOWNLIGHT C/W REMOTE DRIVER	WHITE	GAMMA CENTRIX 1208-WFL-3K	A
L49	NO LONGER REQUIRED				B
L50	NO LONGER REQUIRED				B
L51	34W 4000K LED	600 X 600 T BAR LAY IN FLAT PLATE LED FITTING C/W REMOTE DRIVER AND A RECESS PLASTER MOUNTING KIT	WHITE TRIM	EQUAL TO GAMMA ILLUMINATION AXIS G3 1548- 4K-34W PB	B
L52	DECORATIVE SUSPENDED DALI DIMMABLE PENDANT				B
L53	A SINGLE HORIZONTAL RUN OF LED STRIP LIGHT 4000K WHITE LEDS AT 12MM SPACING WITH A REMOTE CONTROL GEAR LOCATED IN A CONCEALED ACCESSIBLE POSITION NOTED ON THE AS CONSTRUCTED DRAWING. SCREW FIX THE LED STRIP IN THE TUNNEL CEILING S AS PER THE ARCHITECTURAL DETAIL. ENSURE THE DIFFUSER CAN NOT BE REMOVED WITHOUT THE USE OF SPECIALIST TOOLS.			EQUAL TO NEON PRODUCTS AUSTRALIA LF-DFB- NW-300-12 + PR- LIN172153-F	B
L54	A SINGLE HORIZONTAL RUN OF LED STRIP LIGHT 4000K WHITE LEDS AT 12MM SPACING WITH DALI DIMMABLE REMOTE CONTROL GEAR LOCATED IN A CONCEALED ACCESSIBLE POSITION NOTED ON THE AS CONSTRUCTED DRAWING. SCREW FIX THE LED STRIP IN THE JOINERY FLOOR ILLUMINATING UPWARDS AS PER THE ARCHITECTURAL DETAIL.			EQUAL TO NEON PRODUCTS AUSTRALIA LF-DFB- NW-300-12 + PR- LIN172153-F DALI CONTROLLER	B
L55	A SINGLE HORIZONTAL RUN OF LED STRIP LIGHT 4000K WHITE LEDS AT 12MM SPACING WITH DALI DIMMABLE REMOTE CONTROL GEAR LOCATED IN A CONCEALED ACCESSIBLE POSITION NOTED ON THE AS CONSTRUCTED DRAWING. SCREW FIX THE LED STRIP IN THE JOINERY CEILING ILLUMINATING DOWNWARDS AS PER THE ARCHITECTURAL DETAIL.			EQUAL TO NEON PRODUCTS AUSTRALIA LF-DFB- NW-300-12 + PR- LIN172153-F DALI CONTROLLER	B
L56	22W 4000K LED	RECESSED 32 DEG BEAM DOWNLIGHT C/W REMOTE DALI DIMMABLE DRIVER	WHITE TRIM	GAMMA COBALT 1405 4K	B
L57	22W 4000K LED	RECESSED 32 DEG BEAM DOWNLIGHT C/W REMOTE DALI DIMMABLE DRIVER	WHITE TRIM	GAMMA COBALT 1405 4K	B
L58	34W 4000K LED	600 X 600 T BAR LAY IN FLAT PLATE LED FITTING C/W REMOTE DALI DIMMABLE DRIVER	WHITE TRIM	EQUAL TO GAMMA ILLUMINATION AXIS G3 1548- 4K-34W	B

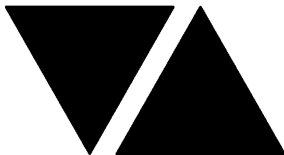

# ELECTRICAL DESIGN GROUP

ELECTRICAL BUILDING SERVICES CONSULTANTS

P.O. Box 15, SHERWOOD Q. 4075

Phone: (07) 3278 4375 Fax: (07) 3716 0222

Web Site: [www.edg.net.au](http://www.edg.net.au) Email: [brisbane@edg.net.au](mailto:brisbane@edg.net.au)

C3328a - ORMISTON COLLEGE - CLI


C3328a-0002(D).xls

## ELECTRICAL EQUIPMENT SCHEDULE

REVISION D - 20 JUNE 2025

THE LIGHT FITTING SUPPLIER CONTACT DETAILS MAY BE AVAILABLE ON THE EDG WEBSITE VIA THE FOLLOWING LINK  
[www.edg.net.au/Links/Lighting.htm](http://www.edg.net.au/Links/Lighting.htm)

TYPE	LAMPS	DESCRIPTION	COLOUR / ACCESSORY	CATALOGUE No	REV
L59	12W/M 3000K LED	FLEXIBLE LED ROPE FLEX SCREW FIXED IN PLACE WITHIN THE JOINERY PELMET AS PER THE ARCHITECTURAL DETAIL. PROVIDE THE STRIP WITH A REMOTE DEDICATED 240-24V POWER SUPPLY LOCATED IN A CONCEALED ACCESSIBLE POSITION NOTED ON THE AS CONSTRUCTED DRAWING.	WHITE	EQUAL TO NPA L-NF-GLOW-WW	B
L60	12W 4000K LED	RECESSED 14 DEG BEAM DOWNLIGHT C/W REMOTE DALI DIMMABLE DRIVER	WHITE TRIM	GAMMA REVI 1394-VNSP-4K-12W	D
E1	LED	EMERGENCY LIGHT: RECESSED NON-MAINTAINED EMERGENCY LIGHT. AS2293 CLASSIFICATION C0-D40 - C90-D40.	WHITE	STANILITE SF1LEDPLITHIUM BATTERY	A
E2	LED	EMERGENCY LIGHT: RECESSED NON-MAINTAINED EMERGENCY LIGHT. AS2293 CLASSIFICATION MIN C0-D25 - C90-D25.	BLACK	STANILITE SF1LEDPLITHIUM BATTERY BLTRIM	A
EX	LED	EXIT LIGHT: MAINTAINED 24M VIEWING DISTANCE EXIT LIGHT C/W DIFFUSERS & DIRECTIONAL ARROWS AS SHOWN. CEILING OR WALL MOUNT BETWEEN 2100mm & 2700mm AFFL IF THERE IS NO VERTICAL SURFACE TO MOUNT THE FITTING ON WITHIN THIS RANGE CONFIRM THE MOUNTING HEIGHT WITH THE ENGINEER. AS2293 CLASSIFICATION C0-D3.2 - C90-E2.	WHITE LOGO GREEN BACKGROUND WHITE BODY	STANILITE PLQLEDPLITHIUM BATTERY	A
EMERGENCY PACK		LIGHT FITTINGS THAT ARE DESIGNATED AS BEING PROVIDED WITH AN EMERGENCY PACK ARE TO BE PROVIDED WITH AN INTEGRAL AS2293 EMERGENCY PACK. THE FITTINGS ARE TO BE NON MAINTAINED WITH ALL LAMPS SWITCHED AS PER THE LIGHTING CONTROL FOR THAT SPACE UNLESS NOTED OTHERWISE. REFER TO THE SPECIFICATION FOR FURTHER DETAILS OF THE CONFIGURATION AND SWITCHING OF EMERGENCY LIGHTS.			A
LIGHTING CONTROL SWITCH PANEL 1 (SP1)		MULTI GANG SWITCH PANEL AS PER THE SP1 SCHEMATIC MOUNTED AT 1000mm AFFL UNLESS NOTED OTHERWISE.	WHITE	CLIPSAL C2000 SERIES 30USM	A
LIGHTING CONTROL SWITCH PANEL 2 (SP2)		MULTI GANG SWITCH PANEL AS PER THE SP2 SCHEMATIC MOUNTED AT 1000mm AFFL UNLESS NOTED OTHERWISE.	WHITE	CLIPSAL C2000 SERIES 30USM	A
PROXIMITY DETECTOR SWITCH (PD)		ADJUSTABLE FLUSH RECESSED 360 DEGREE PIR PRESENCE DETECTOR TO OPERATE THE ASSOCIATED LIGHTS FOR A PRE-SET AMOUNT OF TIME. ADJUST THE TIME AND SENSITIVITY ON SITE AS DIRECTED BY THE ENGINEER. SUBMIT DETAILS OF THE MOVEMENT DETECTOR SWITCH FOR APPROVAL PRIOR TO ORDERING	WHITE	CLIPSAL	A
LIGHTING CONTROL SENSOR CEILING MOUNTED		NO LONGER REQUIRED			C

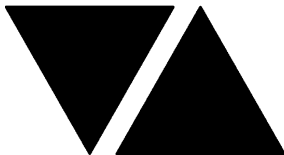

# ELECTRICAL DESIGN GROUP

ELECTRICAL BUILDING SERVICES CONSULTANTS

P.O. Box 15, SHERWOOD Q. 4075

Phone: (07) 3278 4375 Fax: (07) 3716 0222

Web Site: [www.edg.net.au](http://www.edg.net.au) Email: [brisbane@edg.net.au](mailto:brisbane@edg.net.au)

C3328a - ORMISTON COLLEGE - CLI

C3328a-0002(D).xls

## ELECTRICAL EQUIPMENT SCHEDULE


REVISION D - 20 JUNE 2025

THE LIGHT FITTING SUPPLIER CONTACT DETAILS MAY BE AVAILABLE ON THE EDG WEBSITE VIA THE FOLLOWING LINK  
[www.edg.net.au/Links/Lighting.htm](http://www.edg.net.au/Links/Lighting.htm)

TYPE	LAMPS	DESCRIPTION	COLOUR / ACCESSORY	CATALOGUE No	REV
LIGHTING CONTROL SENSOR WAL MOUNTED		NO LONGER REQUIRED			C
LIGHTING BAR (LB)		NO LONGER REQUIRED			B
LIGHTING PATCH PANEL (LPP)		NO LONGER REQUIRED			B
STAGE OUTLET PANEL (SOP)		FLUSH RECESS STAINLESS STEEL POWDER COATED ENCLOSURE TO HOUSE THE OUTLETS NOTED ON THE SOP DETAIL. PROVIDE THE ENCLOSURE WITH A LOCKABLE HINGED COVER WITH A CABLE ACCESS FLAP TO ALLOW CABLES TO BE PLUGGED INTO THE OUTLETS AND THE COVER CLOSED. PROVIDE A SHOP DRAWING OF THE SOP FOR APPROVAL. REFER TO THE BOOTH POWER CONTROL SCHEMATIC FOR DETAILS OF THE CABLING AND OUTLETS TO BE PROVIDED AS PART OF THE STAGE OUTLET PANEL. CONFIRM THE COLOUR WITH THE ARCHITECT.	STAINLESS STEEL	REFER TO THE OUTLET DETAILS FOR EACH OUTLET TYPES	A
DALI POT / SWITCH		ROTARY STANDALONE DALI DIMMER /LIGHT SWITCH C/W CIRCUIT IDENTIFICATION ON THE FACEPLATE BEHIND THE SURROUND MOUNTED AT 1000mm AFFL UNLESS NOTED OTHERWISE.	WHITE	CLIPSAL C2000 SERIES C/W SMARTSCAPE AUTOMATION DALI-RD20-M	B
DIM		ROTARY STANDALONE DALI DIMMER /LIGHT SWITCH C/W CIRCUIT IDENTIFICATION ON THE FACEPLATE BEHIND THE SURROUND MOUNTED ON THE DISTRIBUTION BOARD ESCUTCHEON	WHITE	CLIPSAL C2000 SERIES C/W SMARTSCAPE AUTOMATION DALI-RD20-M	B
ONE-WAY LIGHT SWITCH		ONE-WAY LIGHT SWITCH C/W CIRCUIT IDENTIFICATION ON THE FACEPLATE BEHIND THE SURROUND MOUNTED AT 1000mm AFFL UNLESS NOTED OTHERWISE.	WHITE	CLIPSAL C2000 SERIES 30USM	A
ONE-WAY LIGHT SWITCH C/W LED INDICATOR		ONE-WAY LIGHT SWITCH C/W CIRCUIT IDENTIFICATION ON THE FACEPLATE BEHIND THE SURROUND MOUNTED AT 1000mm AFFL UNLESS NOTED OTHERWISE. PROVIDE THE SWITCH WITH AN AMBER LED THAT ILLUMINATES WHEN THE SWITCH IS TURNED ON	WHITE	CLIPSAL C2000 SERIES 30USM	A
TWO-WAY LIGHT SWITCH		TWO-WAY LIGHT SWITCH C/W CIRCUIT IDENTIFICATION ON THE FACEPLATE BEHIND THE SURROUND MOUNTED AT 1000mm AFFL UNLESS NOTED OTHERWISE.	WHITE	CLIPSAL C2000 SERIES 30USM	A
SINGLE POWER OUTLET		SINGLE POWER OUTLET C/W CIRCUIT IDENTIFICATION ON THE FACEPLATE BEHIND THE SURROUND MOUNT AT 300mm AFFL U.N.O. RATING 10A U.N.O.	WHITE	CLIPSAL C2000 SERIES	A
SINGLE 10A POWER OUTLET SUSPENDED (SUS)		SINGLE 10A POWER OUTLET SUSPENDED TO 1600 AFFL UNLESS NOTED OTHERWISE VIA A 3MM STAINLESS STEEL WIRE ROPE.	WHITE	CLIPSAL SS15	A

C3328a-0002(D).xls

Pages inc. any attach. 7 of 12

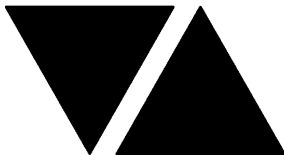

# ELECTRICAL DESIGN GROUP

ELECTRICAL BUILDING SERVICES CONSULTANTS

P.O. Box 15, SHERWOOD Q. 4075

Phone: (07) 3278 4375 Fax: (07) 3716 0222

Web Site: [www.edg.net.au](http://www.edg.net.au) Email: [brisbane@edg.net.au](mailto:brisbane@edg.net.au)

C3328a - ORMISTON COLLEGE - CLI

C3328a-0002(D).xls

## ELECTRICAL EQUIPMENT SCHEDULE

REVISION D - 20 JUNE 2025

THE LIGHT FITTING SUPPLIER CONTACT DETAILS MAY BE AVAILABLE ON THE EDG WEBSITE VIA THE FOLLOWING LINK  
[www.edg.net.au/Links/Lighting.htm](http://www.edg.net.au/Links/Lighting.htm)

TYPE	LAMPS	DESCRIPTION	COLOUR / ACCESSORY	CATALOGUE No	REV
DOUBLE POWER OUTLET		DOUBLE POWER OUTLET C/W CIRCUIT IDENTIFICATION ON THE FACEPLATE BEHIND THE SURROUND MOUNT AT 300mm AFFL U.N.O. RATING 10A U.N.O.	WHITE	CLIPSAL C2000 SERIES	A
WEATHERPROOF POWER OUTLET (WP)		IP54 WEATHERPROOF SINGLE / DOUBLE POWER OUTLET AS NOTED ON DRAWING C/W COVER FLAP OVER SOCKET. MOUNT AT MINIMUM 1100mm AFFL U.N.O. RATING 10A U.N.O.	-	CLIPSAL WSCF227F	A
15A WEATHERPROOF POWER OUTLET (WP 15A)		IP53 WEATHERPROOF 15A SINGLE POWER OUTLET. MOUNT AT MINIMUM 1100mm AFFL U.N.O. RATING 15A U.N.O.	-	CLIPSAL WSCF227/1/15	A
SINGLE 15A POWER OUTLET SUSPENDED (SUS)		SINGLE 15A POWER OUTLET SUSPENDED TO 2300 AFFL UNLESS NOTED OTHERWISE VIA A 3MM STAINLESS STEEL WIRE ROPE.	WHITE	CLIPSAL "56 SERIES" 56SPO315	A
SPECIAL PURPOSE OUTLET		SPECIAL PURPOSE OUTLET TYPE AS NOTED. MOUNT AT 1350mm AFFL U.N.O. RATING 20A U.N.O. CONNECT TO EQUIPMENT VIA FLEXIBLE CONDUIT.			A
RED DOUBLE POWER OUTLET (RED)		RED DOUBLE POWER OUTLET MOUNTED AT 1800mm AFFL U.N.O. RATING 10A U.N.O. EACH RED OUTLET IS TO BE CABLED DIRECTLY TO AN INLET ON DUCT A AS PER THE DUCT A DETAIL.	RED	CLIPSAL C2000 SERIES	A
DUCT A		FLOOR TO CEILING TWO CHANNEL 85 X 50 CABLE ACCESS DUCT C/W ALL FIXINGS AND ACCESSORIES TO TRIM AND COMPLETE THE INSTALLATION. PROVIDE 10 AMP INLETS ON THE DUCT EACH CABLED TO A DOUBLE RED GPO AS PER THE DUCT A DETAIL. CONFIRM THE INLET HEIGHTS ON SITE WITH THE SCHOOL.	NATURAL ALUMINIUM	ELECTRIC CABLE DUCT SYSTEM ECD SP8550	A
SINGLE-PHASE ISOLATOR		SINGLE-PHASE WEATHERPROOF ISOLATOR. MOUNT AT 1350mm AFFL U.N.O. RATING 20A U.N.O. CONNECT TO EQUIPMENT VIA FLEXIBLE CONDUIT.	-	CLIPSAL WHT20	A
THREE-PHASE ISOLATOR		THREE-PHASE WEATHERPROOF ISOLATOR. MOUNT AT 1350mm AFFL U.N.O. RATING 20A U.N.O. CONNECT TO EQUIPMENT VIA FLEXIBLE CONDUIT.	-	CLIPSAL WHT35	A
MATV OUTLET		MATV OUTLET CONNECTED TO A DEDICATED ANTENNA TO PROVIDE THE LOCALLY AVAILABLE FREE TO AIR TV SERVICES	WHITE	CLIPSAL C2000 SERIES	A
SPEAKER RECESSED		RECESSED 265 DIA DUAL CONE SPEAKER C/W 100V MULTI-TAP TRANSFORMER AND FLUSH GRILLE. EACH SPEAKER IS TO BE WIRED IN STAR CONFIGURATION TO THE PA SYSTEM AMPLIFIER MOUNTED IN THE COMMUNICATIONS RACK CR A	WHITE	BOSCH BSC-CS EASYFIT 36W MAX 24W RATED	A



# ELECTRICAL DESIGN GROUP

ELECTRICAL BUILDING SERVICES CONSULTANTS

P.O. Box 15, SHERWOOD Q. 4075

Phone: (07) 3278 4375 Fax: (07) 3716 0222

Web Site: [www.edg.net.au](http://www.edg.net.au) Email: [brisbane@edg.net.au](mailto:brisbane@edg.net.au)

C3328a - ORMISTON COLLEGE - CLI


C3328a-0002(D).xls

## ELECTRICAL EQUIPMENT SCHEDULE

REVISION D - 20 JUNE 2025

THE LIGHT FITTING SUPPLIER CONTACT DETAILS MAY BE AVAILABLE ON THE EDG WEBSITE VIA THE FOLLOWING LINK  
[www.edg.net.au/Links/Lighting.htm](http://www.edg.net.au/Links/Lighting.htm)

TYPE	LAMPS	DESCRIPTION	COLOUR / ACCESSORY	CATALOGUE No	REV
SPEAKER SURFACE		265 DIA DUAL CONE SPEAKER C/W SURFACE MOUNTING ENCLOSURE 100V MULTI-TAP TRANSFORMER AND FLUSH GRILLE. EACH SPEAKER IS TO BE WIRED IN STAR CONFIGURATION TO THE PA SYSTEM AMPLIFIER MOUNTED IN THE COMMUNICATIONS RACK CR A	WHITE	BOSCH BSC-CS EASYFIT 36W MAX 24W RATED	A
INTERNAL HORN		SURFACE MOUNTED ADJUSTABLE MULTI TAPPED 30W IP66 HORN SPEAKER EACH HORN SPEAKER IS TO BE WIRED IN STAR CONFIGURATION TO THE PA SYSTEM AMPLIFIER MOUNTED IN THE COMMUNICATIONS RACK CR A	GREY	AUSTRALIAN MONITOR ATC 30	A
EXTERNAL HORN		IP65 100V MULTI TAP 50W EXTERNAL SPEAKER EACH SPEAKER IS TO BE WIRED IN STAR CONFIGURATION TO THE PA SYSTEM AMPLIFIER MOUNTED IN THE COMMUNICATIONS RACK CR A	BLACK	AUSTRALIAN MONITOR FLEX 50	A
CAT 6 LINK OUTLET		RJ45 CAT-6 OUTLET INTERCONNECTED VIA 4-PAIR CAT-6 UTP CABLE. MOUNT UP TO 3 RJ45 OUTLETS PER MULTI-GANG FACEPLATE WITH SEPARATE PERMANENT LABELLING FOR EACH OUTLET.	WHITE	CLIPSAL C2000 SERIES MOLEX	A
CAT 6 COMMUNICATIONS OUTLET		RJ45 CAT-6 COMMUNICATIONS OUTLET, CABLED BACK TO THE COMMUNICATIONS RACK CR-1 TERMINATED ONTO FACILITY PATCH PANELS VIA 4-PAIR CAT-6 UTP CABLE. MOUNT UP TO 3 RJ45 OUTLETS PER MULTI-GANG FACEPLATE WITH SEPARATE PERMANENT LABELLING FOR EACH OUTLET.	WHITE UNLESS NOTED OTHERWISE. CEILING MOUNTED OUTLET TO MATCH CEILING COLOUR	CLIPSAL C2000 SERIES MOLEX	A
COMMUNICATIONS RACK CR-56		EXISTING BUILDING 56 (SUMMERSET CENTRE) CORE RACK			A
COMMUNICATIONS RACK CR-32		EXISTING BUILDING 32 (JAC) CORE RACK			A
COMMUNICATIONS RACK CR-A		FREE STANDING 41 RU MINIMUM 1,000 DEEP COMMUNICATIONS RACK CR-A REFER TO THE SPECIFICATION FOR ADDITIONAL INFORMATION AND REQUIREMENTS. PROVIDE A SHOP DRAWING OF THE RACK INCLUDING THE ARRANGEMENT OF EQUIPMENT PROVIDED WITHIN IT AS PART OF THE CONTRACT FOR APPROVAL.			A
COMMUNICATIONS RACK CR-B		FREE STANDING 41 RU MINIMUM 1,000 DEEP COMMUNICATIONS RACK CR-B REFER TO THE SPECIFICATION FOR ADDITIONAL INFORMATION AND REQUIREMENTS. PROVIDE A SHOP DRAWING OF THE RACK INCLUDING THE ARRANGEMENT OF EQUIPMENT PROVIDED WITHIN IT AS PART OF THE CONTRACT FOR APPROVAL.			A

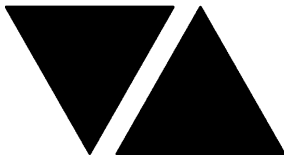

# ELECTRICAL DESIGN GROUP

ELECTRICAL BUILDING SERVICES CONSULTANTS

P.O. Box 15, SHERWOOD Q. 4075

Phone: (07) 3278 4375 Fax: (07) 3716 0222

Web Site: [www.edg.net.au](http://www.edg.net.au) Email: [brisbane@edg.net.au](mailto:brisbane@edg.net.au)

C3328a - ORMISTON COLLEGE - CLI

C3328a-0002(D).xls

## ELECTRICAL EQUIPMENT SCHEDULE


REVISION D - 20 JUNE 2025

THE LIGHT FITTING SUPPLIER CONTACT DETAILS MAY BE AVAILABLE ON THE EDG WEBSITE VIA THE FOLLOWING LINK  
[www.edg.net.au/Links/Lighting.htm](http://www.edg.net.au/Links/Lighting.htm)

TYPE	LAMPS	DESCRIPTION	COLOUR / ACCESSORY	CATALOGUE No	REV
COMMUNICATIONS RACK CR-C		FREE STANDING 41 RU MINIMUM 1,000 DEEP COMMUNICATIONS RACK CR-C REFER TO THE SPECIFICATION FOR ADDITIONAL INFORMATION AND REQUIREMENTS. PROVIDE A SHOP DRAWING OF THE RACK INCLUDING THE ARRANGEMENT OF EQUIPMENT PROVIDED WITHIN IT AS PART OF THE CONTRACT FOR APPROVAL.			A
SECURITY EQUIPMENT		WALL MOUNT THE SECURITY EQUIPMENT			A
CABLE ACCESS CA (CA)		BLANK FACEPLATES C/W CONCEALED DEEP WALL BOX INTERCONNECTED VIA A CONCEALED 50 DIA COMMUNICATIONS CONDUIT WITH A DRAW WIRE . MOUNT AT 300mm AFFL U.N.O.	WHITE	CLIPSAL C2000 SERIES	A
CABLE ACCESS CB (CB)		BLANK FACEPLATES C/W CONCEALED DEEP WALL BOX INTERCONNECTED VIA A CONCEALED 50 DIA COMMUNICATIONS CONDUIT WITH A DRAW WIRE . MOUNT AT 300mm AFFL U.N.O.	WHITE	CLIPSAL C2000 SERIES	A
FLOOR BOX 1 (FB1)		FLUSH RECESSED FLOOR BOX C/W FLOOR FINISH INLAY PROVIDE EACH FLOOR BOX WITH A DOUBLE GPO AND A COMMUNICATIONS OUTLET. PROVIDE A SPARE 32 DIA COMMUNICATIONS CONDUIT FROM EACH FLOOR BOX TO THE ACCESSIBLE GROUND FLOOR CEILING SPACE C/W SPARE DRAW WIRE. IDENTIFY THE CONDUIT LOCATIONS ON THE AS BUILT DOCUMENTS.	STAINLESS STEEL	ELECTRIC CABLE DUCT SYSTEMS FB2SDR	A
CABLE TERMINATION ENCLOSURE (CTE)		EXISTING FLUSH RECESSED POWDER COATED STAINLESS STEEL LOCKABLE IP66 CABLE TERMINATION ENCLOSURE PROVIDED AS PER THE CTE DETAILS.			A
DB-A		WALL MOUNTED DISTRIBUTION BOARD DB-A REFER TO THE SCHEMATIC, SPECIFICATION AND DISTRIBUTION BOARD DB-A SCHEDULE FOR ADDITIONAL INFORMATION AND REQUIREMENTS. PROVIDE A SHOP DRAWING OF THE DB FOR APPROVAL.			A
DB-B		WALL MOUNTED DISTRIBUTION BOARD DB-B REFER TO THE SCHEMATIC, SPECIFICATION AND DISTRIBUTION BOARD DB-B SCHEDULE FOR ADDITIONAL INFORMATION AND REQUIREMENTS. PROVIDE A SHOP DRAWING OF THE DB FOR APPROVAL.			A
DB-C		WALL MOUNTED DISTRIBUTION BOARD DB-C REFER TO THE SCHEMATIC, SPECIFICATION AND DISTRIBUTION BOARD DB-C SCHEDULE FOR ADDITIONAL INFORMATION AND REQUIREMENTS. PROVIDE A SHOP DRAWING OF THE DB FOR APPROVAL.			A
DB-D		WALL MOUNTED DISTRIBUTION BOARD DB-D REFER TO THE SCHEMATIC, SPECIFICATION AND DISTRIBUTION BOARD DB-D SCHEDULE FOR ADDITIONAL INFORMATION AND REQUIREMENTS. PROVIDE A SHOP DRAWING OF THE DB FOR APPROVAL.			A
DB-2		EXISTING BUILDING 2 DISTRIBUTION BOARD DB-2.			A
DB-3		EXISTING BUILDING 3 DISTRIBUTION BOARD DB-3.			A
DB-4		EXISTING BUILDING 4 DISTRIBUTION BOARD DB-4.			A
DB-37		EXISTING BUILDING 37 DISTRIBUTION BOARD DB-37.			A

C3328a-0002(D).xls

Pages inc. any attach. 10 of 12

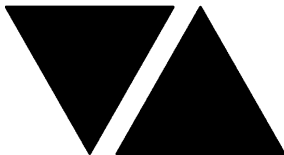

# ELECTRICAL DESIGN GROUP

ELECTRICAL BUILDING SERVICES CONSULTANTS

P.O. Box 15, SHERWOOD Q. 4075

Phone: (07) 3278 4375 Fax: (07) 3716 0222

Web Site: [www.edg.net.au](http://www.edg.net.au) Email: [brisbane@edg.net.au](mailto:brisbane@edg.net.au)

C3328a - ORMISTON COLLEGE - CLI

C3328a-0002(D).xls

## ELECTRICAL EQUIPMENT SCHEDULE


REVISION D - 20 JUNE 2025

THE LIGHT FITTING SUPPLIER CONTACT DETAILS MAY BE AVAILABLE ON THE EDG WEBSITE VIA THE FOLLOWING LINK  
[www.edg.net.au/Links/Lighting.htm](http://www.edg.net.au/Links/Lighting.htm)

TYPE	LAMPS	DESCRIPTION	COLOUR / ACCESSORY	CATALOGUE No	REV
MSB		EXISTING MIDDLE SCHOOL MAIN SWITCHBOARD			A
M1		SUPPLY AUTHORITY METER.			A
M2		EXISTING PRIVATE MULTIFUNCTION METERS.			A
MSSBx		MECHANICAL SERVICES SWITCHBOARD PROVIDED BY THE MECHANICAL SERVICES SUB CONTRACTOR. CONFIRM THE SUBMAIN CONNECTION POSITION, SIZE, CAPACITY AND FAULT LEVEL WITH THE MECHANICAL SERVICES SUB CONTRACTOR.			A
POWER RISER		PROVIDE A 300 WIDE POWER CABLE LADDER VERTICALLY TO PROVIDE CABLE ACCESS FROM THE UNDERGROUND CONDUITS TO THE GROUND FLOOR CEILING SPACE AND THEN HORIZONTALLY THROUGH THE CEILING SPACE TO DB-CLI.			A
COMMUNICATIONS RISER		PROVIDE A 600 WIDE PERFORATED COMMUNICATIONS CABLE TRAY VERTICALLY WITHIN THE RISER TO PROVIDE CABLE ACCESS FROM PIT 1 TO THE FIRST FLOOR CEILING SPACE ABOVE THE DATA ROOM.			A
SECURITY PIEZO SIREN		FLUSH RECESSED PIEZO SIREN SUBMIT DETAILS OF THE PIEZO SIRENS FOR APPROVAL PRIOR TO ORDERING.			A
SECURITY INTRUDER DETECTOR		DUAL-TECHNOLOGY MOVEMENT DETECTORS WALL MOUNTED AS PER THE MANUFACTURER'S SPECIFICATION. CONNECT TO THE LOCAL SECURITY EQUIPMENT WITH ONE DETECTOR PER ZONE. TYPE TO MATCH THE EXISTING DETECTORS USED IN THE ADMINISTRATION BUILDING. PROGRAM THE SECURITY SYSTEM AS REQUIRED TO ACCOMMODATE THE NEW DETECTORS AND CHANGES TO THE SATISFACTION OF THE SCHOOL. SUBMIT DETAILS OF THE DETECTORS INCLUDING THE MOUNTING ARRANGEMENTS FOR APPROVAL PRIOR TO ORDERING.			A
SECURITY INTRUDER DETECTOR 360 DEG		DUAL-TECHNOLOGY 360 DEG CEILING MOUNTED MOVEMENT DETECTORS MOUNTED AS PER THE MANUFACTURER'S SPECIFICATION. CONNECT TO THE LOCAL SECURITY EQUIPMENT WITH ONE DETECTOR PER ZONE. TYPE TO MATCH THE EXISTING DETECTORS USED IN THE ADMINISTRATION BUILDING. PROGRAM THE SECURITY SYSTEM AS REQUIRED TO ACCOMMODATE THE NEW DETECTORS AND CHANGES TO THE SATISFACTION OF THE SCHOOL. SUBMIT DETAILS OF THE DETECTORS INCLUDING THE MOUNTING ARRANGEMENTS FOR APPROVAL PRIOR TO ORDERING.			A
SECURITY SYSTEM KEYPAD (KP)		LCD KEYPAD MOUNTED AT 1100mm AFFL. TYPE TO MATCH THE EXISTING KEY PAD USED IN THE ADMINISTRATION BUILDING. CONNECT TO THE LOCAL SECURITY EQUIPMENT. MOUNT AT 1400 AFFL UNO. PROGRAM THE SECURITY SYSTEM AS REQUIRED TO ACCOMMODATE THE NEW KEY PANELS AND CHANGES TO THE SATISFACTION OF THE SCHOOL. SUBMIT DETAILS FOR APPROVAL PRIOR TO ORDERING			A
THERMAL ALARM		SURFACE MOUNTED THERMAL ALARM C/W HARDWIRED MAINS POWER SUPPLY AND A TAMPER PROOF 10 YEAR LITHIUM BATTERY CONNECTED TO THE SECURITY SYSTEM WITH EACH SMOKE ALARM A DEDICATED ZONE.			A
SMOKE ALARM		SURFACE MOUNTED OPTICAL PHOTOELECTRIC SMOKE ALARM TO AS3786 C/W HARDWIRED MAINS POWER SUPPLY AND A TAMPER PROOF 10 YEAR LITHIUM BATTERY CONNECTED TO THE SECURITY SYSTEM WITH EACH SMOKE ALARM A DEDICATED ZONE.			A
ACCESS CONTROL DOOR ELECTRIC STRIKE (ES)		FLUSH MOUNTED ELECTRIC DOOR STRIKE PLATE SUPPLIED AND INSTALLED AS PART OF THE DOOR. ALLOW TO CONNECT THE ELECTRIC STRIKE TO THE ACCESS CONTROL SYSTEM. PROVIDE DOOR READER MODULES & AUXILIARY POWER SUPPLIES AS REQUIRED. COORDINATE THE ELECTRIC DOOR STRIKE INTERFACE WITH THE DOOR SUPPLIER. EACH ELECTRIC STRIKE IS TO BE PROVIDED WITH DOOR STATUS REPORTING (DOOR OPEN / DOOR CLOSED)			A

C3328a-0002(D).xls

Pages inc. any attach. 11 of 12



# ELECTRICAL DESIGN GROUP

ELECTRICAL BUILDING SERVICES CONSULTANTS

P.O. Box 15, SHERWOOD Q. 4075

Phone: (07) 3278 4375 Fax: (07) 3716 0222

Web Site: [www.edg.net.au](http://www.edg.net.au) Email: [brisbane@edg.net.au](mailto:brisbane@edg.net.au)

C3328a - ORMISTON COLLEGE - CLI

C3328a-0002(D).xls

## ELECTRICAL EQUIPMENT SCHEDULE

REVISION D - 20 JUNE 2025

THE LIGHT FITTING SUPPLIER CONTACT DETAILS MAY BE AVAILABLE ON THE EDG WEBSITE VIA THE FOLLOWING LINK  
[www.edg.net.au/Links/Lighting.htm](http://www.edg.net.au/Links/Lighting.htm)

TYPE	LAMPS	DESCRIPTION	COLOUR / ACCESSORY	CATALOGUE No	REV
ACCESS CONTROL ROLLER SHUTTER DOOR INTERFACE (RSD)		INTERFACE THE ROLLER SHUTTER DOOR CONTROL TO THE ACCESS CONTROL SYSTEM TO ALLOW THE ACCESS CONTROL SYSTEM TO CONTROL THE STATUS OF THE RSD. PROVIDE DOOR READER MODULES & AUXILIARY POWER SUPPLIES AS REQUIRED. COORDINATE THE INTERFACE WITH THE RSD SUPPLIER.			A
ROLLER SHUTTER DOOR REED SWITCH (RS)		PROVIDE EACH ROLLER SHUTTER DOOR WITH A FLUSH REED SWITCH TO PROVIDE THE STATUS OF THE ROLLER SHUTTER DOOR TO THE SECURITY SYSTEM			A
DOOR STATUS SENSOR (DS)		PROVIDE EACH DOOR LEAF WITH A FLUSH REED SWITCH TO PROVIDE THE STATUS OF THE DOOR TO THE SECURITY SYSTEM			B
DOOR HOLD OPEN DEVICE (DH)		PROVIDE A DOOR HOLD OPEN DEVICE CONTROLLED BY THE SECURITY SYSTEM			B
ACCESS CONTROL AUTO DOOR INTERFACE (AD)		INTERFACE THE AUTO DOOR CONTROL TO THE ACCESS CONTROL SYSTEM TO ALLOW THE ACCESS CONTROL SYSTEM TO CONTROL THE STATUS OF THE AUTO DOOR. PROVIDE DOOR READER MODULES & AUXILIARY POWER SUPPLIES AS REQUIRED. COORDINATE THE DOOR INTERFACE WITH THE DOOR SUPPLIER.			A
ACCESS CONTROL DOOR CARD READER (CR)		WALL-MOUNTED 1400AFL VANDAL-RESISTANT ACCESS CONTROL SYSTEM HEAVY-DUTY PROXIMITY CARD READER TO MOUNT ON THE 44MM WIDE MULLION. TYPE TO MATCH THE EXISTING READERS USED IN THE ADMINISTRATION BUILDING. PROVIDE DOOR READERS AND POWER SUPPLIES AS REQUIRED			A
ACCESS CONTROL MAGNETIC DOOR HOLDER (MH)		SURFACE MOUNTED MAGNETIC HOLDER (ONE PER DOOR LEAF) AND INSTALLED AS PART OF THE DOOR. ALLOW TO CONNECT THE MAGNETIC HOLDER TO THE ACCESS CONTROL SYSTEM. PROVIDE DOOR READER MODULES & AUXILIARY POWER SUPPLIES AS REQUIRED. COORDINATE THE MAGNETIC DOOR HOLDER INTERFACE WITH THE DOOR SUPPLIER. EACH DOOR LEAF IS TO BE PROVIDED WITH DOOR STATUS REPORTING (DOOR OPEN / DOOR CLOSED)			A
OUTLETS DENOTED WITH BK		OUTLETS AND FITTINGS DENOTED WITH BK ARE TO BE BLACK IN COLOUR			A
OUTLETS DENOTED WITH SK		OUTLETS DENOTED WITH SK ARE TO BE MOUNTED ON SKIRTING			A
MOBILE PHONE BOOSTER SYSTEM ANTENNA		PROVIDE A MOBILE PHONE BOOSTER SYSTEM AS PER THE MOBILE PHONE BOOSTER SYSTEM SCOPE			A
AUDIO VISUAL RACK		PROVIDE THE FLEXIBLE LEARNING SPACES WITH AN AV SYSTEM AS PER THE AV SYSTEM SCOPE			A
VIDEO SYSTEM		PROVIDE THE VIDEO SYSTEM AS PER THE VIDEO SYSTEM SCOPE			A



# ELECTRICAL DESIGN GROUP

ELECTRICAL BUILDING SERVICES CONSULTANTS

P.O. Box 15, SHERWOOD Q. 4075

Phone: (07) 3278 4375 Fax: (07) 3716 0222

Web Site: [www.edg.net.au](http://www.edg.net.au) Email: [brisbane@edg.net.au](mailto:brisbane@edg.net.au)


C3328a - ORMISTON COLLEGE - CLI

C3328a-0005(A).xls

## ABBREVIATIONS SCHEDULE

REVISION A - 10 OCTOBER 2024

ABBREVIATION	DESCRIPTION
500	NUMBER DENOTES MOUNTING HEIGHT AFFL
15A	15-AMP
24HR	24-HOUR
A	AMPS
AB	MOUNT ABOVE BENCH
AD	AUTO DOOR
AFFL	ABOVE FINISHED FLOOR LEVEL
BB	MOUNT BELOW BENCH
BH	MOUNT ON / IN BULKHEAD
BWU	BOILING WATER UNIT
CCTV	CLOSED CIRCUIT TELEVISION
C/W	COMPLETE WITH
CEIL	MOUNT ON CEILING
CS	MOUNT CONCEALED WITHIN CEILING SPACE
COMMS	COMMUNICATIONS
DB	DISTRIBUTION BOARD
DC	DEDICATED CIRCUIT
DIM	LIGHT SWITCH TO BE DIMMABLE
DW	DISH WASHER
EXIST	EXISTING EQUIPMENT TO REMAIN UNLESS NOTED OTHERWISE
FLOOR	FLOOR MOUNTED
FIP	FIRE INDICATOR PANEL
HD	HAND DRYER
HP	HOT PLATE
HV	HIGH VOLTAGE
HWS	HOT WATER SYSTEM
LV	LOW VOLTAGE
MATV	MASTER ANTENNA TELEVISION
MCB	MINIATURE CIRCUIT BREAKER
MCCB	MOLDED CASE CIRCUIT BREAKER
MDF	MAIN DISTRIBUTION FRAME
MSB	MAIN SWITCH BOARD
MSSB	MECHANICAL SERVICES SWITCHBOARD
MW	MICROWAVE
N	NEUTRAL
NTS	NOT TO SCALE
OV	OVEN
PH	PHASE
POT	PLAIN OLD TELEPHONE
RCD	CIRCUIT PROTECTED VIA A 30mA RESIDUAL CURRENT DEVICE, AUXILIARY TO THE MCB.
REF	REFRIGERATION
RH	RANGE HOOD
RSD	ROLLER SHUTTER DOOR
SUS	SUSPENDED
TEX	TOILET EXHAUST
TRC	TELECOM REFERENCE CONDUCTOR
UNO	UNLESS NOTED OTHERWISE
V	VOLTS
WC	MOUNT WITHIN WALL CAVITY
WP	WEATHERPROOF TO IP56



# ELECTRICAL DESIGN GROUP

ELECTRICAL BUILDING SERVICES CONSULTANTS

P.O. Box 15, SHERWOOD Q. 4075

Phone: (07) 3278 4375 Fax: (07) 3716 0222

Web Site: www.edg.net.au Email: brisbane@edg.net.au

C3328a - ORMISTON COLLEGE - CLI

C3328a-0006(C).xls


DISTRIBUTION BOARD DB-A (GROUND FLOOR)

REVISION C - 09 MAY 2025

							REV
FAULT CURRENT:		6kA UTILISING CASCADING		MAIN SWITCH:		160A NON AUTO LOAD BREAK SWITCH	A
CHASSIS SIZE:		2X 84 POLES		SUPPLIED FROM:		DB-CLI	A
CHASSIS RATING:		250A		SUPPLY CABLE:		4C50 + E	C
PHASES:		3					A
PROVIDE THE DB WITH A FULL WIDTH EMPTY DIN RAIL TO ACCOMMODATE FUTURE CONTACTORS AND CONTROLS IN ADDITION TO THE DYNALITE EQUIPMENT. PROVIDE THE DB WITH AN AS2293 EMERGENCY LIGHTING CONTROL SYSTEM TO CONTROL THE ASSOCIATED EMERGENCY LIGHTS. PROVIDE THE DB WITH SURGE PROTECTION.							A
CIRC	PH	CIRCUIT BREAKER (amps)	CONTROL EQUIPMENT	CABLE SIZE (mm2)	LOCATION	CIRCUIT USE	
P1	1	20	RCBO	2.5	EXTERNAL	GPO	A
P2	1	20	RCBO	2.5	EXTERNAL	GPO	A
P3	1	25	RCBO	4.0	AMENITY	HD	A
P4	1	25	RCBO	4.0	AMENITY	HD	A
P5	1	25	RCBO	4.0	AMENITY	HD	A
P6	1	25	RCBO	4.0	AMENITY	HD	A
P7	1	20	RCBO	2.5	FOYER	AUTO DOOR	A
P8	1	20	RCBO	2.5	BOOK HIRE	GPO	A
P9	1	20	RCBO	2.5	PRINT	GPO	A
P10	1	20	RCBO	2.5	PRINT	GPO	A
P11	1	20	RCBO	2.5	WORKROOM	GPO	A
P12	1	20	RCBO	2.5	RECEPTION OFFICES	GPO	A
P13	1	20	RCBO	2.5	WORK ROOM	TV	A
P14	1	20	RCBO	2.5	WORK ROOM	GPO	A
P15	1	20	RCBO	2.5	OFFICES	GPO	A
P16	1	20	RCBO	2.5	STUDY	GPO	A
P17	1	20	RCBO	2.5	LIBRARY	CLEANING	A
P18	1	20	RCBO	2.5	LIBRARY	FB	A
P19	1	20	RCBO	2.5	LIBRARY	FB	A
P20	1	20	RCBO	2.5	LIBRARY	FB	A
P21	1	20	RCBO	2.5	LIBRARY	FB	A
P22	1	20	RCBO	2.5	LIBRARY	CHECK OUT	A
P23	1	20	RCBO	2.5	LIBRARY	FB	A
P24	1	20	RCBO	2.5	LIBRARY	BOOTH	A
P25	1	20	RCBO	2.5	LIBRARY	BOOTH	A
P26	1	20	RCBO	2.5	LIBRARY	FB	A
P27	1	20	RCBO	2.5	JUNIOR	GPO	A
P28	1	20	RCBO	2.5	INCUBATOR	GPO	A
P29	1	20	RCBO	2.5	CHARGING	GPO	A
P30	1	20	RCBO	2.5	LIBRARY	CLEANING	A
P31	1	20	RCBO	2.5	INCUBATOR	GPO	A
P32	1	20	RCBO	2.5	MAKER SPACE	GPO	A
P33	1	20	RCBO	2.5	3D PRINTING	15A	A
P34	1	20	RCBO	2.5	3D PRINTING	15A	A
P35	1	20	RCBO	2.5	3D PRINTING	15A	A
P36	1	20	RCBO	2.5	MAKER SPACE	GPO	A
P37	1	20	RCBO	2.5	MAKER SPACE	15A	A
P38	1	20	RCBO	2.5	3D PRINTING	15A	A
P39	1	20	RCBO	2.5	3D PRINTING	15A	A
P40	1	20	RCBO	2.5	LASER	15A	A
P41	1	20	RCBO	2.5	DESIGN	GPO	A
P42	1	20	RCBO	2.5	DESIGN	GPO	A
P43	1	20	RCBO	2.5	STORE	CLEANING	A
P44	1	20	RCBO	2.5	DINING	GPO	A
P45	1	20	RCBO	2.5	VR	GPO	A
P46	1	20	RCBO	2.5	LOUNGE AMENITY	HD	A
P47	1	20	RCBO	2.5	CHILLER PLANT	GPO	A

C3328a-0006(C).xls

Pages inc. any attach. 1 of 4



# ELECTRICAL DESIGN GROUP

ELECTRICAL BUILDING SERVICES CONSULTANTS

P.O. Box 15, SHERWOOD Q. 4075

Phone: (07) 3278 4375 Fax: (07) 3716 0222

Web Site: www.edg.net.au Email: brisbane@edg.net.au


C3328a - ORMISTON COLLEGE - CLI

C3328a-0006(C).xls

DISTRIBUTION BOARD DB-A (GROUND FLOOR)

REVISION C - 09 MAY 2025

							REV
FAULT CURRENT: 6kA UTILISING CASCADING CHASSIS SIZE: 2X 84 POLES CHASSIS RATING: 250A PHASES: 3							A
MAIN SWITCH: 160A NON AUTO LOAD BREAK SWITCH SUPPLIED FROM: DB-CLI SUPPLY CABLE: 4C50 + E							A
PROVIDE THE DB WITH A FULL WIDTH EMPTY DIN RAIL TO ACCOMMODATE FUTURE CONTACTORS AND CONTROLS IN ADDITION TO THE DYNALITE EQUIPMENT. PROVIDE THE DB WITH AN AS2293 EMERGENCY LIGHTING CONTROL SYSTEM TO CONTROL THE ASSOCIATED EMERGENCY LIGHTS. PROVIDE THE DB WITH SURGE PROTECTION.							C
							A
CIRC	PH	CIRCUIT BREAKER (amps)	CONTROL EQUIPMENT	CABLE SIZE (mm2)	LOCATION	CIRCUIT USE	
P48	1	20	RCBO	2.5	KITCHENETTE	GPO	A
P49	1	20	RCBO	2.5	KITCHENETTE	AUTO BOILER	A
P50	1	20	RCBO	2.5	KITCHENETTE	HWS	A
P51	3	40	RCBO	6.0	SOUTHERN STAGE	3PH	A
P52	1	20	RCBO	4.0	SOUTHERN STAGE	GPO	A
P53	1	20	RCBO	4.0	SOUTHERN STAGE	GPO	A
P54	1	20	RCBO	2.5	EXTERNAL	WATER FEATURE	A
P55	1	20	RCBO	2.5	EXTERNAL	WATER FEATURE	A
P56	1	20	RCBO	2.5	RECORDING BOOTH	GPO	A
P57	1	20	RCBO	2.5	RECORDING BOOTH	GPO	A
P58	1	20	RCBO	2.5	STUDIO	GPO	A
P59	1	20	RCBO	2.5	STUDIO	GREEN SCREEN	A
P60	1	20	RCBO	2.5	STUDIO	LIGHTING BAR GPO	A
P61	1	20	RCBO	2.5	STUDIO	LIGHTING BAR GPO	A
P62	1	20	RCBO	2.5	RECORDING BOOTH	LPP GPO	A
P63	1	20	RCBO	2.5	RECORDING BOOTH	LPP GPO	A
P64	1	20	RCBO	2.5	RECORDING BOOTH	LPP GPO	A
P65	3	40	RCBO	6.0	RECORDING BOOTH	LPP 3PH	A
P66	3	40	RCBO	6.0	STAGE SO	3 PH	A
P67	1	20	RCBO	2.5	STAGE SO	GPO	A
P68	1	20	RCBO	2.5	STAGE SO	GPO	A
P69							A
P70	1	20	RCBO	2.5	STORE	LOCKERS	A
P71	3	20	RCBO	2.5	PRINT	3 PH OUTLET	A
P72	1	20	RCBO	2.5	PRINT	GPO	A
P73	1	20	RCBO	2.5	PRINT	PRINTER	A
P74	1	20	RCBO	2.5	PRINT	PRINTER	A
P75	1	20	RCBO	2.5	PRINT	PRINTER	A
P76	1	20	RCBO	2.5	MAKER SPACE	FB	A
P77	1	20	RCBO	2.5	FOYER CS	PROJECTOR	A
P78	1	20	RCBO	2.5	FOYER CS	PROJECTOR	A
P79	3	20	RCBO	4.0	EXTERNAL	PUMP	A
P80	1	20	RCBO	2.5	FOYER CS	PROJECTOR	C
P81	1	20	RCBO	2.5	FOYER CS	PROJECTOR	C
P82	1	20	RCBO	2.5	FOYER	RECEPTION	C
P83	1	20	RCBO	2.5	FOYER CS	PROJECTOR	C
P84	1	20	RCBO	2.5	FOYER CS	PROJECTOR	C
P85	1	20	RCBO	2.5	FOYER CS	PROJECTOR	C



# ELECTRICAL DESIGN GROUP

ELECTRICAL BUILDING SERVICES CONSULTANTS

P.O. Box 15, SHERWOOD Q. 4075

Phone: (07) 3278 4375 Fax: (07) 3716 0222

Web Site: www.edg.net.au Email: brisbane@edg.net.au

C3328a - ORMISTON COLLEGE - CLI

C3328a-0006(C).xls


DISTRIBUTION BOARD DB-A (GROUND FLOOR)

REVISION C - 09 MAY 2025

							REV
FAULT CURRENT: 6kA UTILISING CASCADING CHASSIS SIZE: 2X 84 POLES CHASSIS RATING: 250A PHASES: 3							A
MAIN SWITCH: 160A NON AUTO LOAD BREAK SWITCH SUPPLIED FROM: DB-CLI SUPPLY CABLE: 4C50 + E							A
PROVIDE THE DB WITH A FULL WIDTH EMPTY DIN RAIL TO ACCOMMODATE FUTURE CONTACTORS AND CONTROLS IN ADDITION TO THE DYNALITE EQUIPMENT. PROVIDE THE DB WITH AN AS2293 EMERGENCY LIGHTING CONTROL SYSTEM TO CONTROL THE ASSOCIATED EMERGENCY LIGHTS. PROVIDE THE DB WITH SURGE PROTECTION.							C
							A
CIRC	PH	CIRCUIT BREAKER (amps)	CONTROL EQUIPMENT	CABLE SIZE (mm2)	LOCATION	CIRCUIT USE	
L1	1	20	RCBO	2.5	CAFE	LIGHTS	A
L2	1	20	RCBO	2.5	CANTEEN	LIGHTS	A
L3	1	20	RCBO PE ON DUSK TC OFF 10.00PM	2.5	EXTERNAL	LIGHTS	A
L4	1	20	RCBO	2.5	KITCHEN	LIGHTS	B
L5	1	20	RCBO	2.5	AMENITY	LIGHTS	A
L6	1	20	RCBO	2.5	AMENITY	LIGHTS	A
L7	1	20	RCBO	2.5	BOOK HIRE	LIGHTS	A
L8							B
L9	1	20	RCBO	2.5	WORK AREA	LIGHTS	B
L10	1	20	RCBO	2.5	SENIOR	LIGHTS	B
L11	1	20	RCBO	2.5	RECEPTION OFFICES	LIGHTS	B
L12	1	20	RCBO	2.5	LIBRARY	LIGHTS	A
L13	1	20	RCBO	2.5	LIBRARY	LIGHTS	A
L14	1	20	RCBO	2.5	LIBRARY	LIGHTS	A
L15	1	20	RCBO	2.5	JUNIOR	LIGHTS	A
L16	1	20	RCBO	2.5	INCUBATOR	LIGHTS	A
L17	1	20	RCBO	2.5	CONNECT	LIGHTS	A
L18	1	20	RCBO	2.5	LIBRARY	LIGHTS	A
L19	1	20	RCBO ZONE 3 SENSORS	2.5	PRINT FOYER	LIGHTS	B
L20	1	20	RCBO	2.5	FOYER	LIGHTS	A
L21	1	20	RCBO	2.5	MAKER SPACE	LIGHTS	A
L22	1	20	RCBO	2.5	VR 3D PRINT	LIGHTS	A
L23	1	20	RCBO ZONE 2 SENSORS	2.5	MEDIA	LIGHTS	A
L24	1	20	RCBO	2.5	STUDIO	LIGHTS	A
L25	1	20	RCBO ZONE 1 SENSORS	2.5	DINING	LIGHTS	A
L26	1	20	RCBO PE ON DUSK TC OFF 10.00PM	2.5	EXTERNAL	LIGHTS	A
L27	1	20	RCBO PE ON DUSK TC OFF 10.00PM	2.5	EXTERNAL	LIGHTS	A
L28	1	20	RCBO PE ON DUSK TC OFF 10.00PM	2.5	EXTERNAL	LIGHTS	A
L29	1	20	RCBO PE ON DUSK TC OFF 10.00PM	2.5	EXTERNAL	LIGHTS	A

C3328a-0006(C).xls

Pages inc. any attach. 3 of 4



# ELECTRICAL DESIGN GROUP

ELECTRICAL BUILDING SERVICES CONSULTANTS

P.O. Box 15, SHERWOOD Q. 4075

Phone: (07) 3278 4375 Fax: (07) 3716 0222

Web Site: www.edg.net.au Email: brisbane@edg.net.au


C3328a - ORMISTON COLLEGE - CLI

C3328a-0006(C).xls

DISTRIBUTION BOARD DB-A (GROUND FLOOR)

REVISION C - 09 MAY 2025

							REV
FAULT CURRENT: 6kA UTILISING CASCADING CHASSIS SIZE: 2X 84 POLES CHASSIS RATING: 250A PHASES: 3							A
MAIN SWITCH: 160A NON AUTO LOAD BREAK SWITCH SUPPLIED FROM: DB-CLI SUPPLY CABLE: 4C50 + E							A
PROVIDE THE DB WITH A FULL WIDTH EMPTY DIN RAIL TO ACCOMMODATE FUTURE CONTACTORS AND CONTROLS IN ADDITION TO THE DYNALITE EQUIPMENT. PROVIDE THE DB WITH AN AS2293 EMERGENCY LIGHTING CONTROL SYSTEM TO CONTROL THE ASSOCIATED EMERGENCY LIGHTS. PROVIDE THE DB WITH SURGE PROTECTION.							A
CIRC	PH	CIRCUIT BREAKER (amps)	CONTROL EQUIPMENT	CABLE SIZE (mm2)	LOCATION	CIRCUIT USE	
L30	1	20	RCBO PE ON DUSK TC OFF 10.00PM	2.5	EXTERNAL	LIGHTS	A
L31	1	20	RCBO PE ON DUSK TC OFF 10.00PM	2.5	EXTERNAL	LIGHTS	A
L32	1	20	RCBO PE ON DUSK TC OFF 10.00PM	2.5	DECK	LIGHTS	A
L33	1	20	RCBO PE ON DUSK OFF DAWN	2.5	EXTERNAL	LIGHTS	A
L34	1	20	RCBO PE ON DUSK TC OFF 10.00PM	2.5	EXTERNAL	LIGHTS	A
L35	1	20	RCBO	2.5	CHILLER PLANT	LIGHTS	A



# ELECTRICAL DESIGN GROUP

ELECTRICAL BUILDING SERVICES CONSULTANTS

P.O. Box 15, SHERWOOD Q. 4075

Phone: (07) 3278 4375 Fax: (07) 3716 0222

Web Site: [www.edg.net.au](http://www.edg.net.au) Email: [brisbane@edg.net.au](mailto:brisbane@edg.net.au)


C3328a - ORMISTON COLLEGE - CLI

C3328a-0007(C).xls

DISTRIBUTION BOARD DB-B (LEVEL 1 PLANT ROOM)

REVISION C - 09 MAY 2025

							REV
FAULT CURRENT:		6kA UTILISING CASCADING		MAIN SWITCH:		160A NON AUTO LOAD BREAK SWITCH	A
CHASSIS SIZE:		2X 60 POLES		SUPPLIED FROM:		DB-CLI	A
CHASSIS RATING:		250A		SUPPLY CABLE:		4C 70	C
PHASES:		3					A
PROVIDE THE DB WITH A FULL WIDTH EMPTY DIN RAIL TO ACCOMMODATE FUTURE CONTACTORS AND CONTROLS IN ADDITION TO THE DYNALITE EQUIPMENT. PROVIDE THE DB WITH AN AS2293 EMERGENCY LIGHTING CONTROL SYSTEM TO CONTROL THE ASSOCIATED EMERGENCY LIGHTS. PROVIDE THE DB WITH SURGE PROTECTION.							A
CIRC	PH	CIRCUIT BREAKER (amps)	CONTROL EQUIPMENT	CABLE SIZE (mm2)	LOCATION	CIRCUIT USE	
P1	1	20	RCBO	2.5	PLANT ROOMS	GPO	A
P2	1	20	RCBO	2.5	FLA	GPO	A
P3	1	20	RCBO	2.5	STORE	GPO	A
P4	1	20	RCBO	2.5	FOYER	CHARGING	C
P5	3	40		6 + 10mm EARTH	LIFT SHAFT	LIFT	A
P6	1	20	RCBO	2.5	CLEANING	GPO	A
P7	1	20	RCBO	2.5	LIBRARY	PRINTERS	C
P8	1	20	RCBO	2.5	LIBRARY	FB	A
P9	1	20	RCBO	2.5	IT RECEPTION	GPO	A
P10	3	63		10.0	DATA ROOM	DB-C	A
P11	1	20	RCBO	2.5	IT WORK ROOM	GPO	A
P12	1	20	RCBO	2.5	IT WORK ROOM	GPO	A
P13	1	20	RCBO	2.5	IT OFFICES	GPO	A
P14	1	20	RCBO	2.5	CLEANING	GPO	A
P15	1	20	RCBO	2.5	IT OFFICES	GPO	A
P16	1	20	RCBO	2.5	IT WORK ROOM	GPO	A
P17	1	20	RCBO	2.5	IT WORK ROOM	GPO	A
P18	1	20	RCBO	2.5	IT WORK ROOM	GPO	A
P19	1	20	RCBO	2.5	IT WORK ROOM	GPO	A
P20	1	20	RCBO	2.5	LOUNGE	GPO	A
P21	1	20	RCBO	2.5	QUITE	GPO	A
P22							A
P23	1	20	RCBO D CURVE	2.5	EXTERNAL DECK	BIG SCREEN	A
P24							A
P25							A
P26							A
P27	1	20	RCBO	2.5	QUITE	GPO	A
P28	1	20	RCBO	2.5	QUITE	GPO	A
P29							A
P30							A
P31							A
P32							A
P33							A
P34	1	20	RCBO	2.5	FOYER	CHARGING	C
P35	1	20	RCBO	2.5	STORE	GPO	A
P36	1	20	RCBO	2.5	KITCHENETTE	AUTO BOILER	A
P37	1	20	RCBO	2.5	KITCHENETTE	GPO	A
P38	1	20	RCBO	2.5	PLANT ROOM	BMS	A
P39	1	20	RCBO	2.5	EXTERNAL DECK	FAN	A
P40	1	20	RCBO	2.5	EXTERNAL DECK	FAN	A
P41	1	20	RCBO	2.5	EXTERNAL DECK	FAN	A
P42							A
P43	1	20	RCBO D CURVE	2.5	EXTERNAL DECK	BIG SCREEN	A
P44	1	20	RCBO	2.5	EXTERNAL DECK	GPO	A
P45	1	20	RCBO	2.5	EXTERNAL DECK	GPO	A
P46	3	20	RCBO	2.5	IT RECEPTION	RSD	A
P47	3	25		4.0	PLANT ROOM	MSSB 2	A



# ELECTRICAL DESIGN GROUP

ELECTRICAL BUILDING SERVICES CONSULTANTS

P.O. Box 15, SHERWOOD Q. 4075

Phone: (07) 3278 4375 Fax: (07) 3716 0222

Web Site: [www.edg.net.au](http://www.edg.net.au) Email: [brisbane@edg.net.au](mailto:brisbane@edg.net.au)


C3328a - ORMISTON COLLEGE - CLI

C3328a-0007(C).xls

DISTRIBUTION BOARD DB-B (LEVEL 1 PLANT ROOM)

REVISION C - 09 MAY 2025

							REV
		FAULT CURRENT:	6kA UTILISING CASCADING	MAIN SWITCH:		160A NON AUTO LOAD BREAK SWITCH	A
		CHASSIS SIZE:	2X 60 POLES	SUPPLIED FROM:		DB-CLI	A
		CHASSIS RATING:	250A	SUPPLY CABLE:		4C 70	C
		PHASES:	3				A
PROVIDE THE DB WITH A FULL WIDTH EMPTY DIN RAIL TO ACCOMMODATE FUTURE CONTACTORS AND CONTROLS IN ADDITION TO THE DYNALITE EQUIPMENT. PROVIDE THE DB WITH AN AS2293 EMERGENCY LIGHTING CONTROL SYSTEM TO CONTROL THE ASSOCIATED EMERGENCY LIGHTS. PROVIDE THE DB WITH SURGE PROTECTION.							A
CIRC	PH	CIRCUIT BREAKER (amps)	CONTROL EQUIPMENT	CABLE SIZE (mm2)	LOCATION	CIRCUIT USE	
L1	1	20	RCBO	2.5	PLANT	LIGHTS	A
L2	1	20	RCBO	2.5	LAB	LIGHTS	C
L3	1	20	RCBO	2.5	FLA	LIGHTS	A
L4							B
L5	1	20	RCBO	2.5	IT	LIGHTS	A
L6	1	20	RCBO	2.5	IT	LIGHTS	A
L7	1	20	RCBO ZONE 4 SENSORS	2.5	LOUNGE	LIGHTS	B
L8	1	20	RCBO ZONE 4 SENSORS	2.5	LOUNGE	LIGHTS	B
L9	1	20	RCBO	2.5	QUITE	LIGHTS	A
L10	1	20	RCBO ZONE 4 SENSORS	2.5	FOYER	LIGHTS	B
L11	1	20	RCBO ZONE 4 SENSORS	2.5	FOYER	LIGHTS	B
L12	1	20	RCBO	2.5	FLA	LIGHTS	A
L13	1	20	RCBO	2.5	PLANT	LIGHTS	A
L14	1	20	RCBO	2.5	EXTERNAL DECK	LIGHTS	A
L15	1	20	RCBO	2.5	EXTERNAL DECK	LIGHTS	A
L16	1	20	RCBO	2.5	LAB	LIGHTS	C



# ELECTRICAL DESIGN GROUP

ELECTRICAL BUILDING SERVICES CONSULTANTS

P.O. Box 15, SHERWOOD Q. 4075

Phone: (07) 3278 4375 Fax: (07) 3716 0222

Web Site: [www.edg.net.au](http://www.edg.net.au) Email: [brisbane@edg.net.au](mailto:brisbane@edg.net.au)

C3328a - ORMISTON COLLEGE - CLI

C3328a-0008(B).xls

DISTRIBUTION BOARD DB-C (DATA ROOM)

REVISION B - 09 MAY 2025

							REV
FAULT CURRENT: 6kA UTILISING CASCADING							A
MAIN SWITCH: 100A NON AUTO LOAD BREAK SWITCH							A
CHASSIS SIZE: 24 POLES							A
SUPPLIED FROM: DB-B -P 10							A
CHASSIS RATING: 250A							A
SUPPLY CABLE: 4C10							A
PHASES: 3							A
PROVIDE THE DB WITH A FULL WIDTH EMPTY DIN RAIL TO ACCOMMODATE FUTURE CONTACTORS AND CONTROLS IN ADDITION TO THE DYNALITE EQUIPMENT.							A
CIRC	PH	CIRCUIT BREAKER (amps)	CONTROL EQUIPMENT	CABLE SIZE (mm2)	LOCATION	CIRCUIT USE	
P1	1	20	RCBO	2.5	DATA ROOM	CR-A	A
P2	1	20	RCBO	2.5	DATA ROOM	CR-A	A
P3	1	20	RCBO	2.5	DATA ROOM	CR-B	A
P4	1	20	RCBO	2.5	DATA ROOM	CR-B	A
P5	1	20	RCBO	2.5	DATA ROOM	CR-C	A
P6	1	20	RCBO	2.5	DATA ROOM	CR-C	A
P7	1	20	RCBO	2.5	DATA ROOM	GPO	A
P8	1	20	RCBO	2.5	DATA ROOM	FUTURE AC	A
P9	1	20	RCBO	2.5	DATA ROOM	GPO	A
P10	1	20	RCBO	2.5	DATA ROOM	SECURITY	A
P11	1	20	RCBO	2.5	DATA ROOM	AV	B
P12	1	20	RCBO	2.5	DATA ROOM	AV	B

**C3328a - ORMISTON COLLEGE - CLI**

**C3328a-0009(B).xls**

### DISTRIBUTION BOARD DB-D (KITCHEN)

**REVISION B - 09 MAY 2025**

[illegible]

LEGEND

	ELECTRICAL SERVICES SWITCHBOARD.
	SWITCHBOARD BY OTHERS.
	SINGLE POWER OUTLET.
	DOUBLE POWER OUTLET.
	SPECIAL PURPOSE POWER OUTLET.
	SINGLE PHASE ISOLATOR.
	THREE PHASE ISOLATOR.
DUCT x	ELECTRICAL SERVICES DUCT, TYPE AS NOTED.
	CONDUIT ROUTE.
	x DENOTES CONDUIT TYPE.
	ELECTRICAL CABLE TRAY, TYPE AS NOTED.
PIT x	ELECTRICAL PIT, TYPE AS NOTED.
	ELECTRICAL FLOOR BOX, TYPE AS NOTED.
	HAND DRYER CONNECTION.
	LIGHTING CONTROL SENSORS NO LONGER REQUIRED.
	LIGHTING PRESENCE DETECTOR SWITCH.
	LIGHTING CONTROL SWITCH PANEL, TYPE AS NOTED.
	ONE-WAY LIGHT SWITCH.
	TWO-WAY LIGHT SWITCH.
	CIRCUIT LINE.
	SWITCH LINE.
	POWER CIRCUIT DESIGNATION. DENOTES DB AND CIRCUIT.
CTE	CABLE TERMINATION ENCLOSURE.
LPP	NO LONGER REQUIRED.
SOP	STAGE OUTLET PANEL.
	ELECTRICAL EQUIPMENT AS NOTED.
	RJ45 COMMUNICATIONS OUTLET.
	CAT-6 LINK CABLE OUTLET.
	MATV OUTLET.
	ACCESS CONTROL AUTO DOOR INTERFACE.
	ACCESS CONTROL CARD READER.
	ACCESS CONTROL DOOR ELECTRIC STRIKE.
	ACCESS CONTROL MAGNETIC DOOR HOLDER.
	ACCESS CONTROL ROLLER SHUTTER DOOR INTERFACE.
	SECURITY KEY PANEL.
	SECURITY DIRECTIONAL MOTION DETECTOR.
	SECURITY 360 DEGREE MOTION DETECTOR.
	SECURITY PIEZO SIREN.

LEGEND

	PA HORN / HOOTER.
	PA RECESSED SPEAKER.
	PA SURFACE MOUNTED SPEAKER.
	THERMAL DETECTOR.
	SMOKE ALARM.
	SUPPLY AUTHORITY METER.
	EXISTING PRIVATE MULTI-FUNCTION METER.
	FUSE.
	SINGLE PHASE.
	THREE PHASE.
	CURRENT TRANSFORMER C/W REMOVABLE LINK.
	CIRCUIT BREAKER.
	ISOLATOR.
	RESIDUAL CURRENT DEVICE.
	CONTACTOR – NORMALLY OPEN.
	CONTACTOR – NORMALLY CLOSED.
	E1: GENERAL LED EMERGENCY LIGHT, WHITE.
	E2: GENERAL LED EMERGENCY LIGHT, WHITE.
	EX: EMERGENCY LED EXIT LIGHT.
	EX TM: EMERGENCY LED EXIT LIGHT C/W BLACK THEATRE MASK.
	LB: NO LONGER REQUIRED.
	Lx: LIGHT FITTING C/W NON-MAINTAINED EMERGENCY BATTERY PACK. TYPE AS NOTED.
	L1: 600 x 300 SURFACE MOUNTED LED FLAT PANEL.
	L2: 1200 x 300 SURFACE MOUNTED LED FLAT PANEL.
	L3: 600 x 600 T-BAR LAY IN LED FLAT PANEL.
	L4: 1200 LONG LED SURFACE MOUNTED BATTEN.
	L5: NO LONGER REQUIRED.
	L6: LED RECESSED DOWNLIGHT.
	L7: LED RECESSED DOWNLIGHT.
	L8: LED RECESSED DOWNLIGHT.
	L9: LED SUSPENDED PENDANT.
	L10: LED RECESSED ADJUSTABLE DOWNLIGHT.
	L11: LED RECESSED DOWNLIGHT.
	L12: LED RECESSED ADJUSTABLE DOWNLIGHT.
	L13: LED RECESSED ADJUSTABLE DOWNLIGHT.
	L14: LED RECESSED ADJUSTABLE DOWNLIGHT.
	L15: LED RECESSED DOWNLIGHT.
	L16: NO LONGER REQUIRED.
	L17: LED RECESSED DOWNLIGHT.
	L18: LED RECESSED DOWNLIGHT.

LEGEND


	L19: LED RECESSED DOWNLIGHT.
	L20: NO LONGER REQUIRED.
	L21: NO LONGER REQUIRED.
	L22: LED SUSPENDED POD PENDANT.
	L23: LED SURFACE EXTRUSION.
	L24: LED SURFACE MOUNTED ALUMINIUM EXTRUSION.
	L25: NO LONGER REQUIRED.
	L26: LED SUSPENDED LOUNGE PENDANT.
	L27: NO LONGER REQUIRED.
	L28: NO LONGER REQUIRED.
	L29: LED STRIP LIGHT MOUNTED UNDER THE OVERHEAD CUPBOARD.
	L30: LED BOLLARD LIGHT.
	L31: 4m HIGH POLE WITH LED FITTING.
	L32: 4m HIGH POLE WITH LED FITTING.
	L36: LED WALL MOUNTED DOWNLIGHT.
	L37: LED ADJUSTABLE SPOTLIGHT.
	L38: LED STRIP LIGHT MOUNTED WITHIN STRUCTURAL CHANNEL.
	L39: LED STRIP LIGHT MOUNTED TO UNDERSIDE OF LOWER AWNING.
	L40: 1200 LONG LED SURFACE MOUNTED BATTEN.
	L41: LED RECESSED ADJUSTABLE DOWNLIGHT.
	L42: LED SURFACE MOUNTED EXTRUSION.
	L43: LED RECESSED DOWNLIGHT.
	L44: LED SURFACE MOUNTED EXTRUSION.
	L45: LED ADJUSTABLE RECESSED DOWNLIGHT.
	L46: LED RECESSED DOWNLIGHT.
	L47: LED RECESSED DOWNLIGHT.
	L48: LED RECESSED DOWNLIGHT.
	L49: NO LONGER REQUIRED.
	L50: NO LONGER REQUIRED.
	L51: 600 x 600 PLASTERBOARD LED FLAT PANEL FITTING.
	L52: DALI DIMMABLE SUSPENDED PENDANT.
	L53: LED STRIP LIGHT.
	L54: LED STRIP LIGHT.
	L55: LED STRIP LIGHT.
	L56: DALI DIMMABLE DOWNLIGHT.
	L57: DALI DIMMABLE DOWNLIGHT.
	L58: 600 x 600 T-BAR DALI DIMMABLE LED FLAT PANEL FITTING.
	L59: LED STRIP LIGHT.
	L60: RECESSED NARROW BEAM DALI DIMMABLE DOWNLIGHT.

LEGEND

	SECURITY SYSTEM DOOR HOLD OPEN DEVICE.
	SECURITY SYSTEM DOOR STATUS SENSOR.
	DALI LIGHTING POT DIMMER / SWITCH.
	ONE-WAY LIGHT SWITCH C/W LED INDICATOR WHEN ON.
	MOBILE PHONE BOOSTER SYSTEM ANTENNA.
	ROLLER SHUTTER DOOR REED SWITCH.
	EXTERNAL HORN SPEAKER.


NOTE

ALL ELECTRICAL PENETRATIONS THROUGH THE ROOF SHEETING ARE TO BE IN LINE WITH THE STRUCTURAL OR MECHANICAL SERVICES PENETRATIONS TO AVOID DEDICATED FLASHINGS FOR THE ELECTRICAL SERVICES.

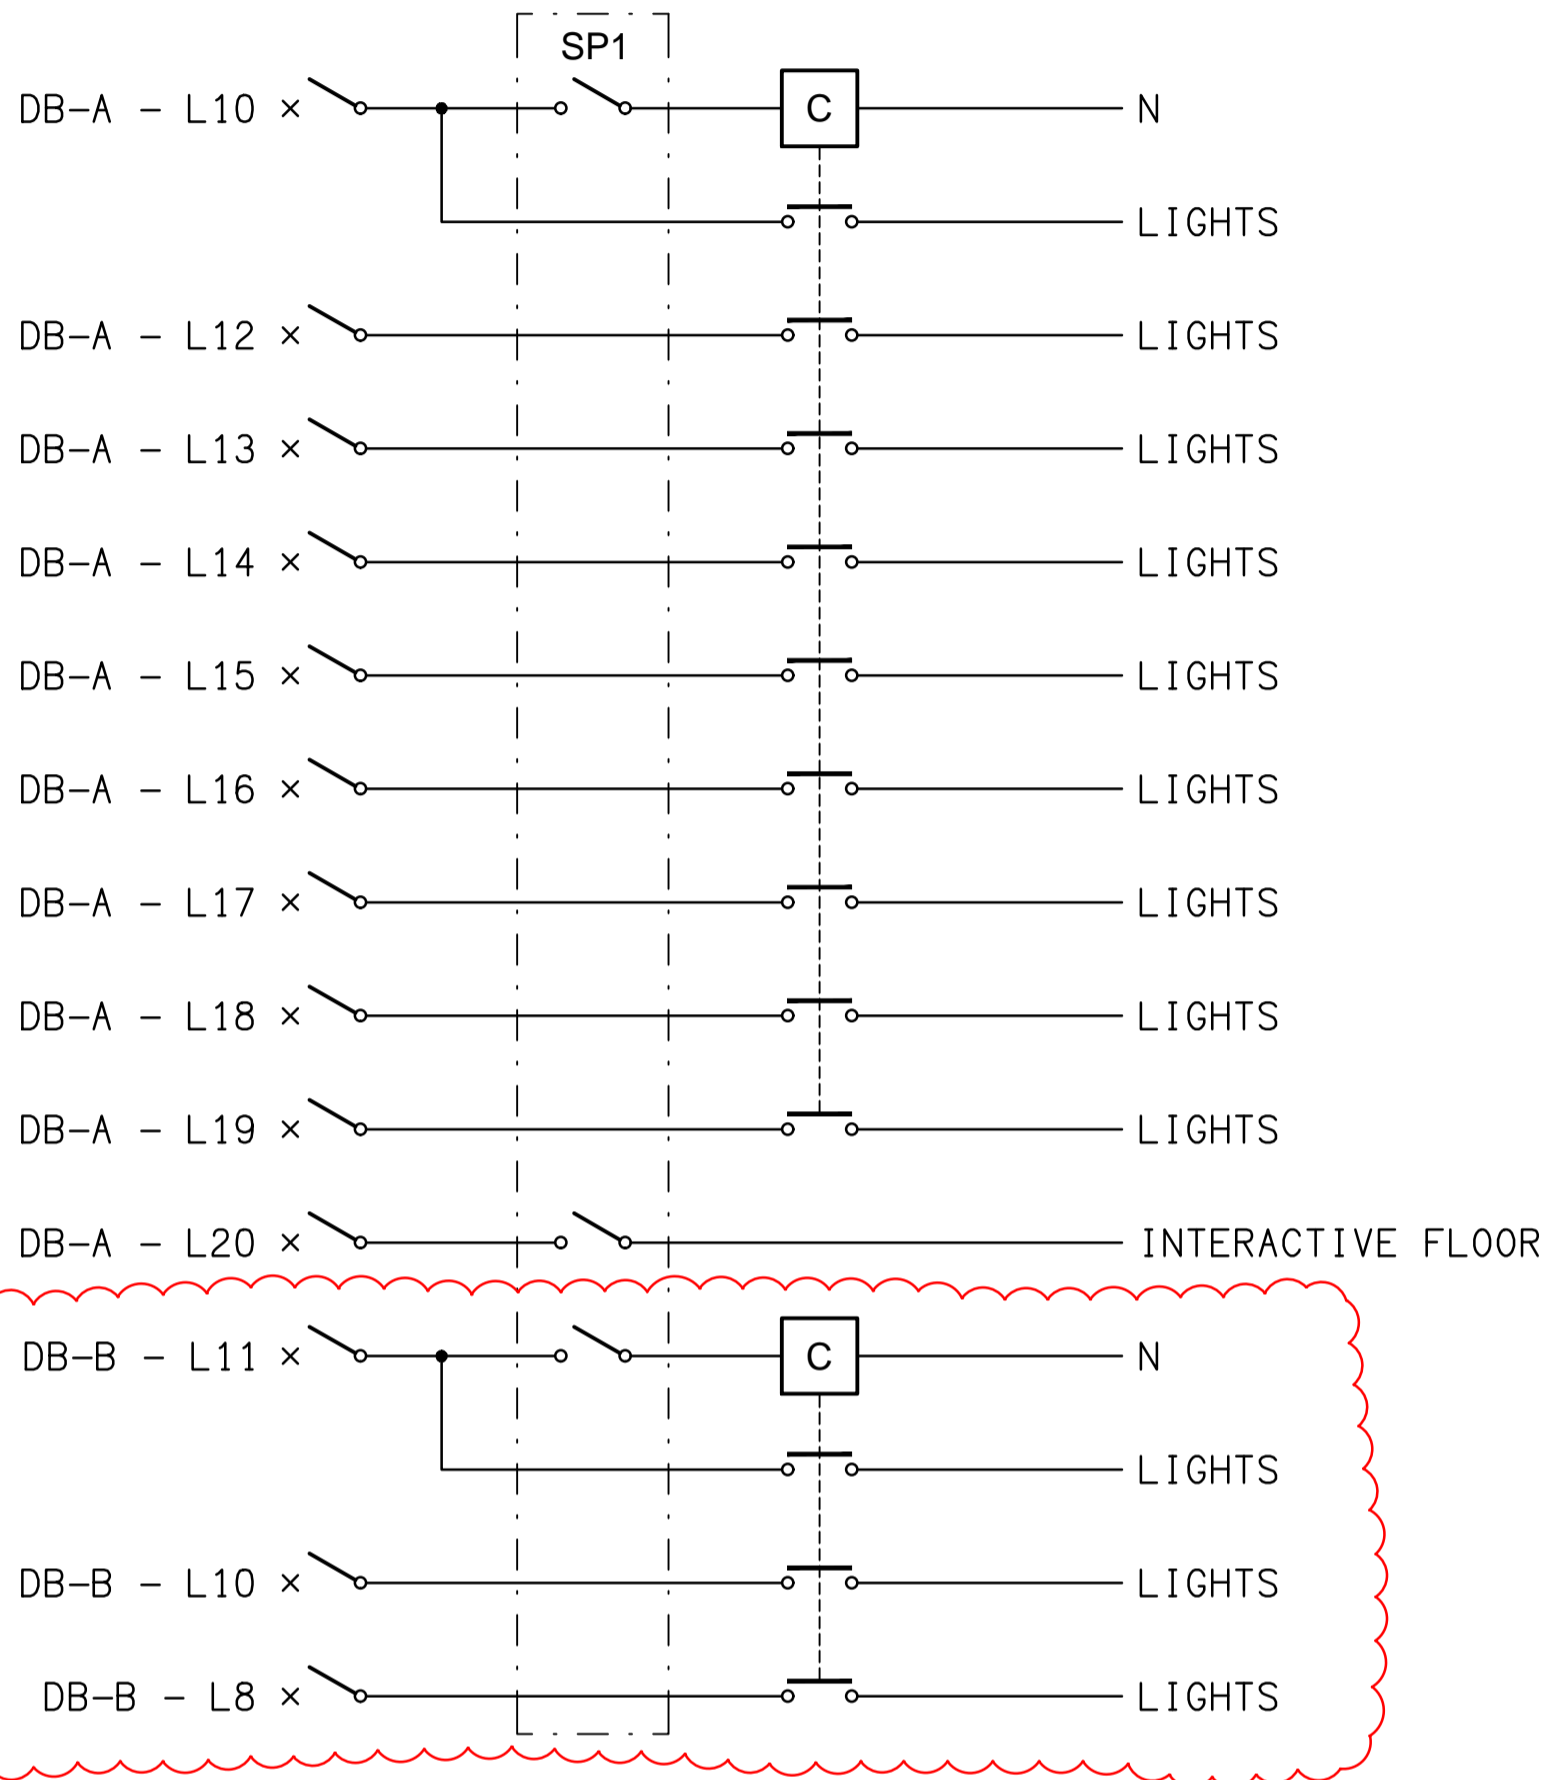


SCHEMATIC

SP1 SWITCHPANEL CONTROL  
NOT TO SCALE

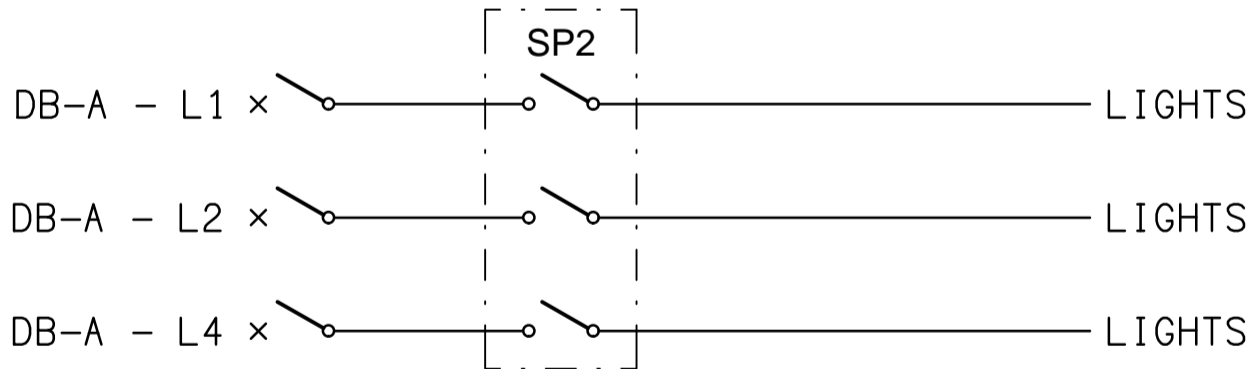

SCHEMATIC


SP2 SWITCHPANEL CONTROL  
NOT TO SCALE

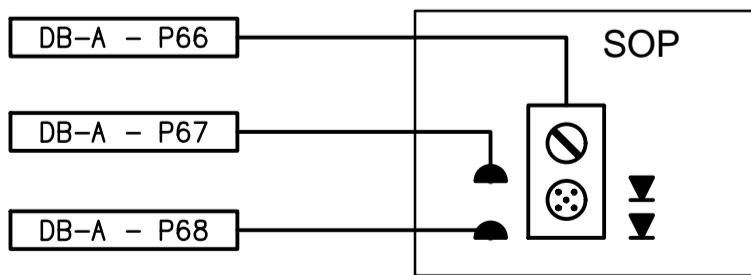

DETAIL

STAGE OUTLET PANEL (SOP) CONFIGURATION  
NOT TO SCALE



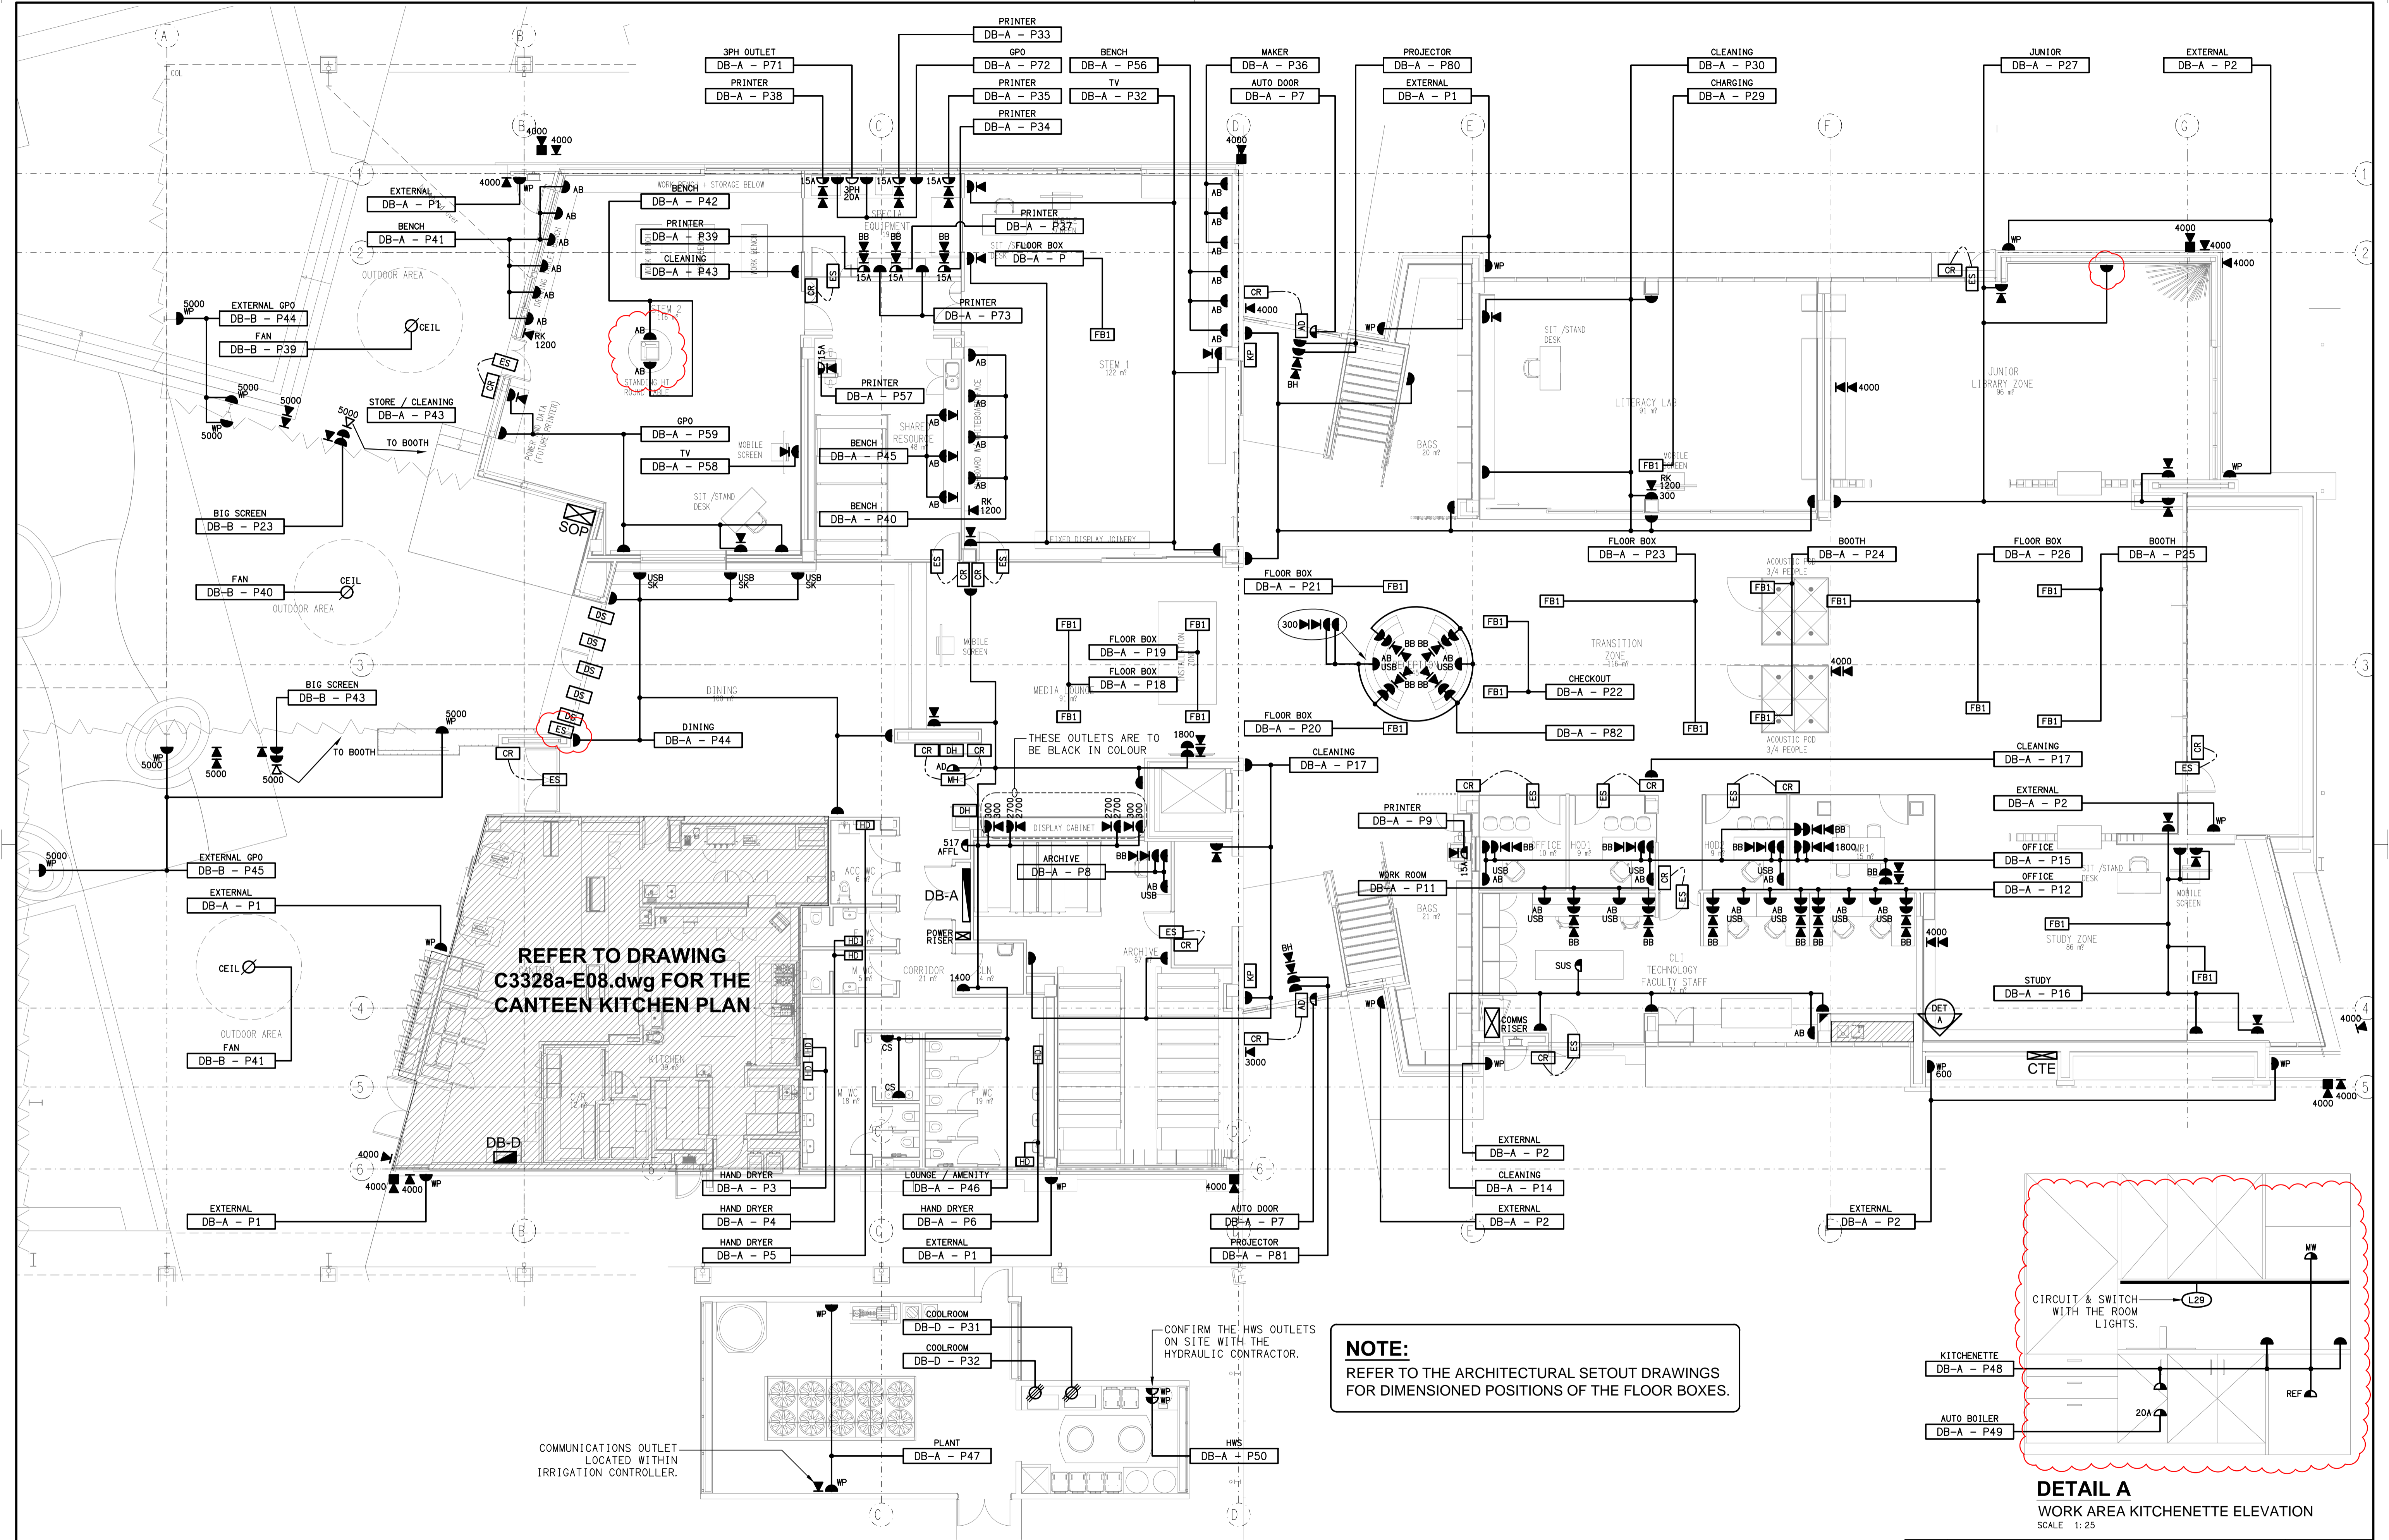

ELECTRICAL DESIGN GROUP BRISBANE  
PTY LTD  
ACN 092 710 793  
TRADING AS:  
ELECTRICAL DESIGN GROUP

THE COPYRIGHT OF THIS DRAWING  
REMAINS THE PROPERTY OF THE  
ELECTRICAL DESIGN GROUP.  
USE FIGURED DIMENSIONS  
IN PREFERENCE TO SCALE.  
ALL DIMENSIONS TO BE  
VERIFIED ONSITE.

construction  
hospitality  
property  
**rohrig**  
rohrig.com.au

Rohrig (Qld) Pty Ltd  
ABN 67 093 753 970  
QBSA LIC NO 740842  
250 Abbotsford Road, Bowen Hills Qld 4006  
PO Box 86 Albion DC Qld 4010  
T+61 (7) 3257 4411 F+61 (7) 3257 2211  
www.rohrig.com.au

**ELECTRICAL DESIGN GROUP**  
ELECTRICAL BUILDING SERVICES CONSULTANTS  
BRISBANE GOLD COAST

P.O. Box 15, Sherwood Q. 4075  
Phone: (07) 3278 4375  
Email: brisbane@edg.net.au  
Web: www.edg.net.au

PROJECT:  
**ORMISTON COLLEGE  
CENTRE FOR LEARNING & INNOVATION**

97 DUNDAS STREET WEST, ORMISTON

E	CONSTRUCTION	20/06/2025
REV:	DESCRIPTION:	DATE:

DRAWING:  
**ELECTRICAL SERVICES  
GROUND LEVEL FLOOR PLAN**

SCALE: 1:100 UNO	AT A1	PROJECT NO: <b>C3328a</b>	DRAWING NO: <b>E04</b>	REVISION: <b>E</b>
---------------------	-------	------------------------------	---------------------------	-----------------------

**NOTE:**  
REFER TO DRAWING C3328a-E03.dwg FOR  
ADDITIONAL LIGHTING DETAILS FOR THE  
OUTDOOR / LANDSCAPING AREAS.

**NOTE:**  
REFER TO DRAWING C3328a-E03.dwg FOR  
ADDITIONAL LIGHTING DETAILS FOR THE  
OUTDOOR / LANDSCAPING AREAS.

**NOTE:**  
REFER TO DRAWING C3328a-E03.dwg FOR  
ADDITIONAL LIGHTING DETAILS FOR THE  
OUTDOOR / LANDSCAPING AREAS.

**SCHEMATIC**  
CIRCUIT DB-A-L20 CONFIGURATION  
NOT TO SCALE

DIM  
MANUAL DALI POT  
DIMMER MOUNTED ON  
THE DB-A ESCUTCHEON.

ELECTRICAL DESIGN GROUP BRISBANE  
PTY LTD  
ACN 092 710 793  
TRADING AS:  
ELECTRICAL DESIGN GROUP

THE COPYRIGHT OF THIS DRAWING  
REMAINS THE PROPERTY OF THE  
ELECTRICAL DESIGN GROUP.  
USE FIGURED DIMENSIONS  
IN PREFERENCE TO SCALE.  
ALL DIMENSIONS TO BE  
VERIFIED ON SITE.

construction  
hospitality  
property  
**rohrig**  
rohrig.com.au

Rohrig (Qld) Pty Ltd  
ABN 67 093 753 970  
QBSA LIC NO 740842  
250 Abbotsford Road, Bowen Hills Qld 4006  
PO Box 86 Albion DC Qld 4010  
T+61 (7) 3257 4411 F+61 (7) 3257 2211  
www.rohrig.com.au


**ELECTRICAL DESIGN GROUP**  
ELECTRICAL BUILDING SERVICES CONSULTANTS  
BRISBANE GOLD COAST  
P.O. Box 15, Sherwood Q. 4075  
Phone: (07) 3278 4375  
Email: brisbane@edg.net.au  
Web: www.edg.net.au

PROJECT:  
**ORMISTON COLLEGE  
CENTRE FOR LEARNING & INNOVATION**  
97 DUNDAS STREET WEST, ORMISTON

H	CONSTRUCTION	20/06/2025
REV:	DESCRIPTION:	DATE:

DRAWING:  
**ELECTRICAL SERVICES  
GROUND LEVEL REFLECTED CEILING PLAN**

SCALE: 1:100	AT A1	PROJECT NO: <b>C3328a</b>	DRAWING NO: <b>E05</b>	REVISION: <b>H</b>
-----------------	-------	------------------------------	---------------------------	-----------------------

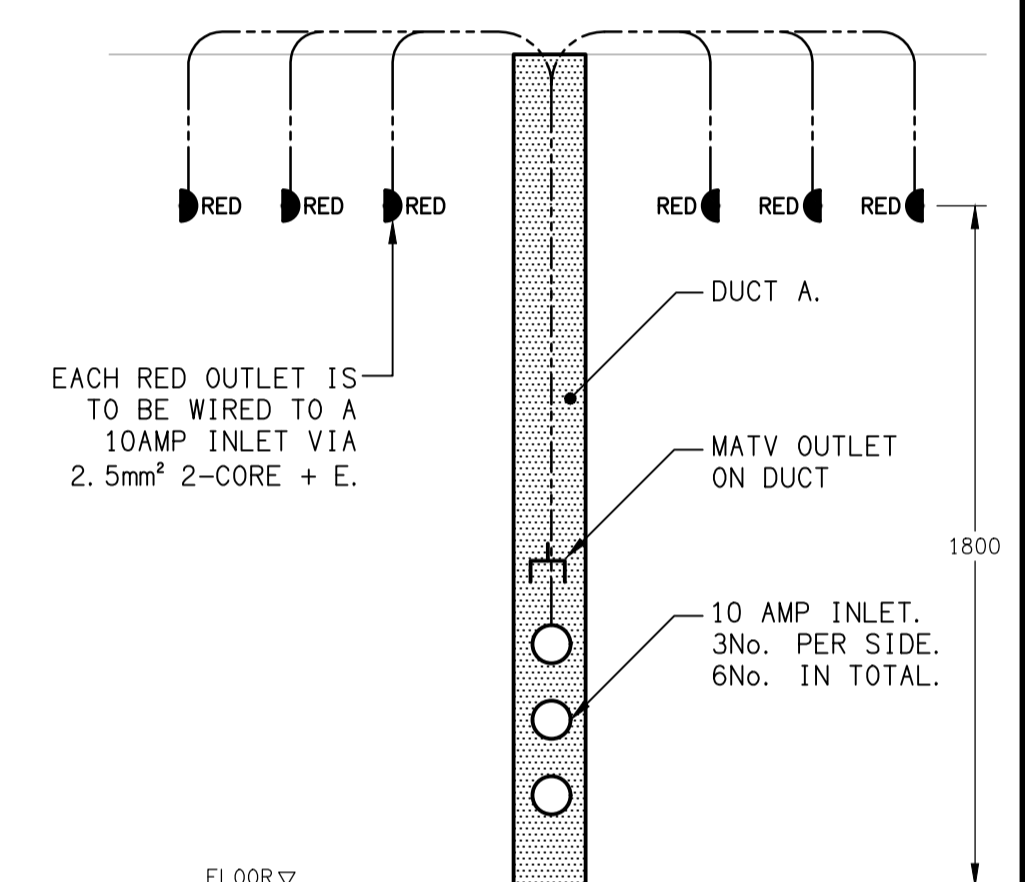

KITCHENETTE  
DB-B - P37

AUTO BOILER  
DB-B - P36


L29

CIRCUIT & SWITCH WITH THE ROOM LIGHTS.


MW

REF


20A

ELECTRICAL DESIGN GROUP BRISBANE PTY LTD ACN 092 710 793		THE COPYRIGHT OF THIS DRAWING REMAINS THE PROPERTY OF THE ELECTRICAL DESIGN GROUP.		<div> <div>             construction              hospitality              property           </div> <div>                rohrig.com.au           </div> </div>	Rohrig (Qld) Pty Ltd ABN 67 093 753 970 QBSA LIC NO 740842 250 Abbotsford Road, Bowen Hills Qld 4006 PO Box 86 Albion DC Qld 4010 T+61 (7) 3257 4411 F+61 (7) 3257 2211 www.rohrig.com.au		<div>  <div> <b>ELECTRICAL DESIGN GROUP</b>              ELECTRICAL BUILDING SERVICES CONSULTANTS              BRISBANE GOLD COAST           </div> </div>		PROJECT: ORMISTON COLLEGE CENTRE FOR LEARNING & INNOVATION		DRAWING: <b>ELECTRICAL SERVICES</b> <b>LEVEL 1 FLOOR PLAN</b>				
TRADING AS: ELECTRICAL DESIGN GROUP		USE FIGURED DIMENSIONS IN PREFERENCE TO SCALE.			ALL DIMENSIONS TO BE VERIFIED ONSITE.		P.O.Box 15, Sherwood Q.4075 Phone: (07) 3278 4375 Email: brisbane@edg.net.au Web: www.edg.net.au		97 DUNDAS STREET WEST, ORMISTON		SCALE: 1:100		AT A1	PROJECT NO: <b>C3328a</b>	DRAWING NO: <b>E06</b>



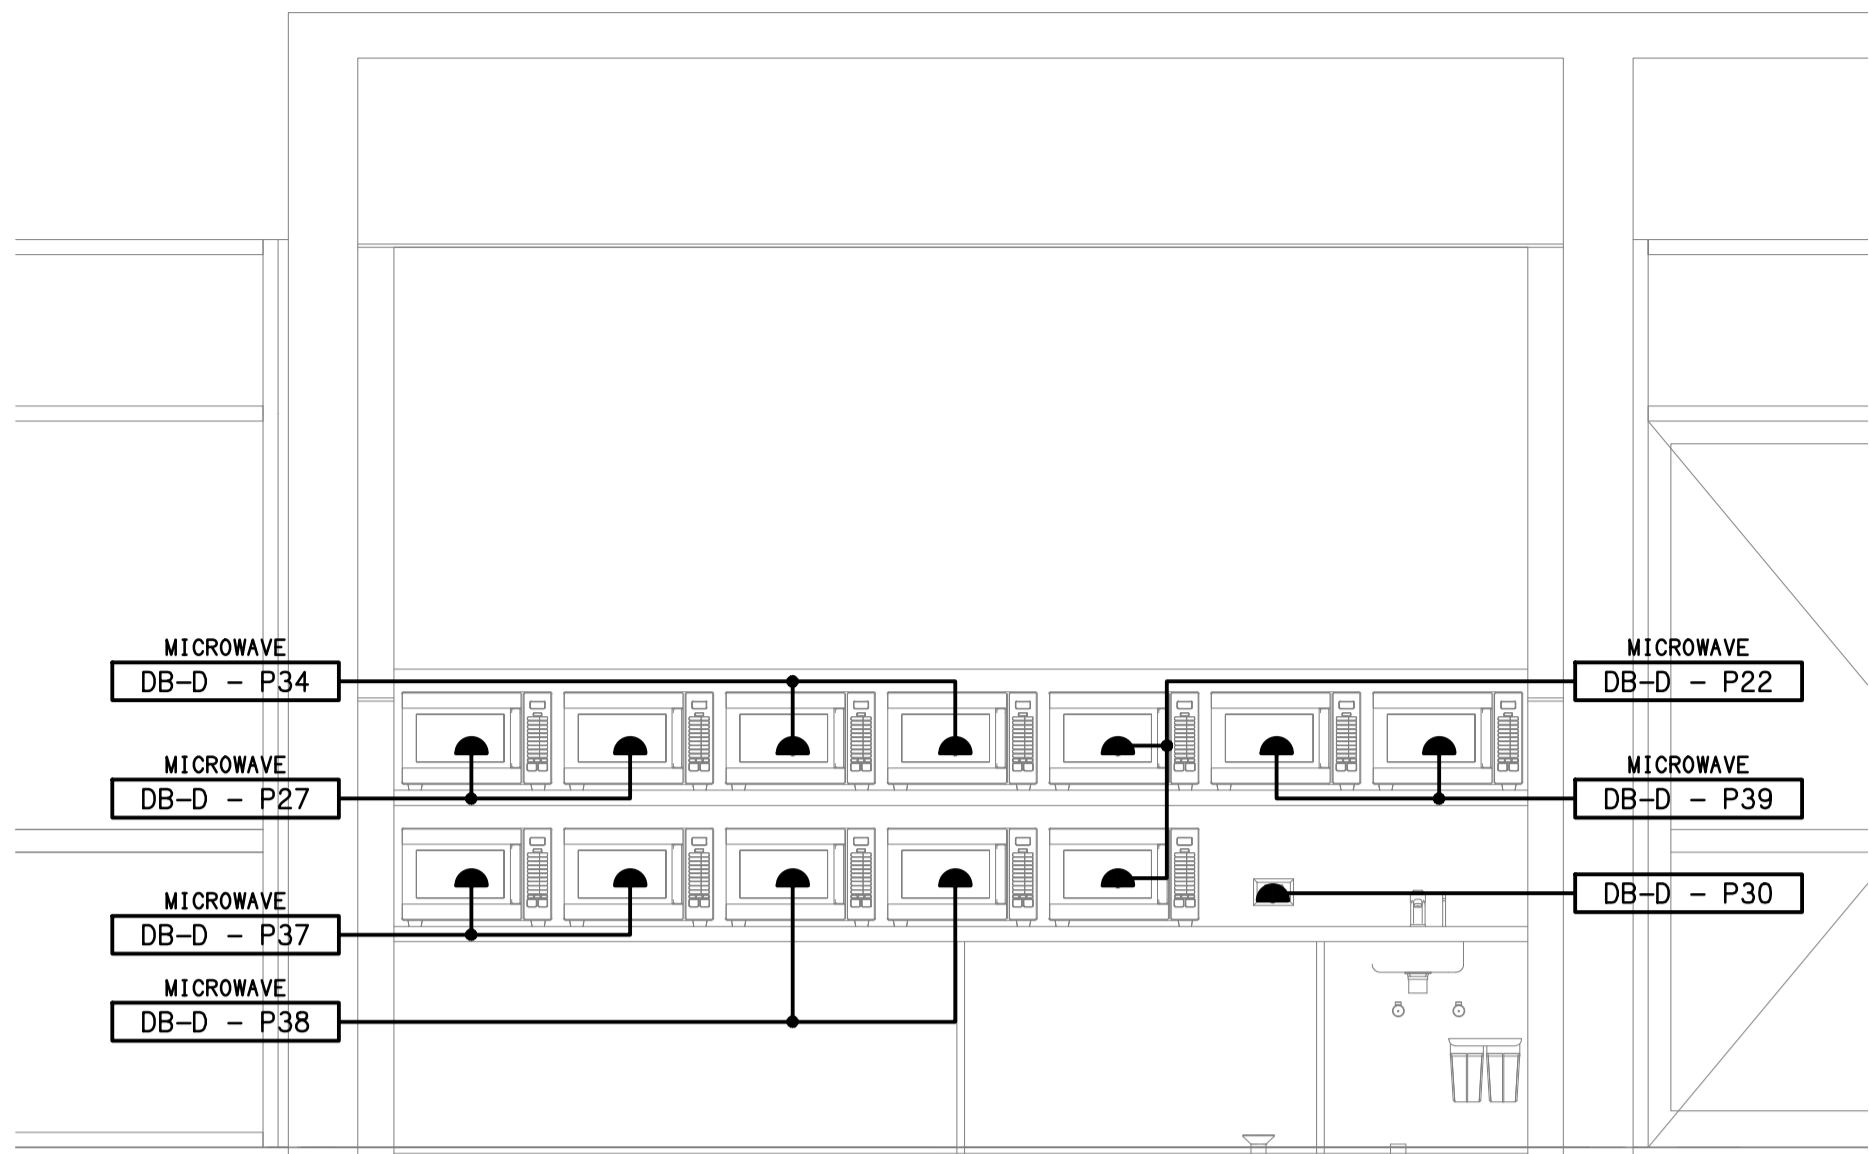

**DETAIL A**  
MICROWAVE WALL ELEVATION  
SCALE 1: 25

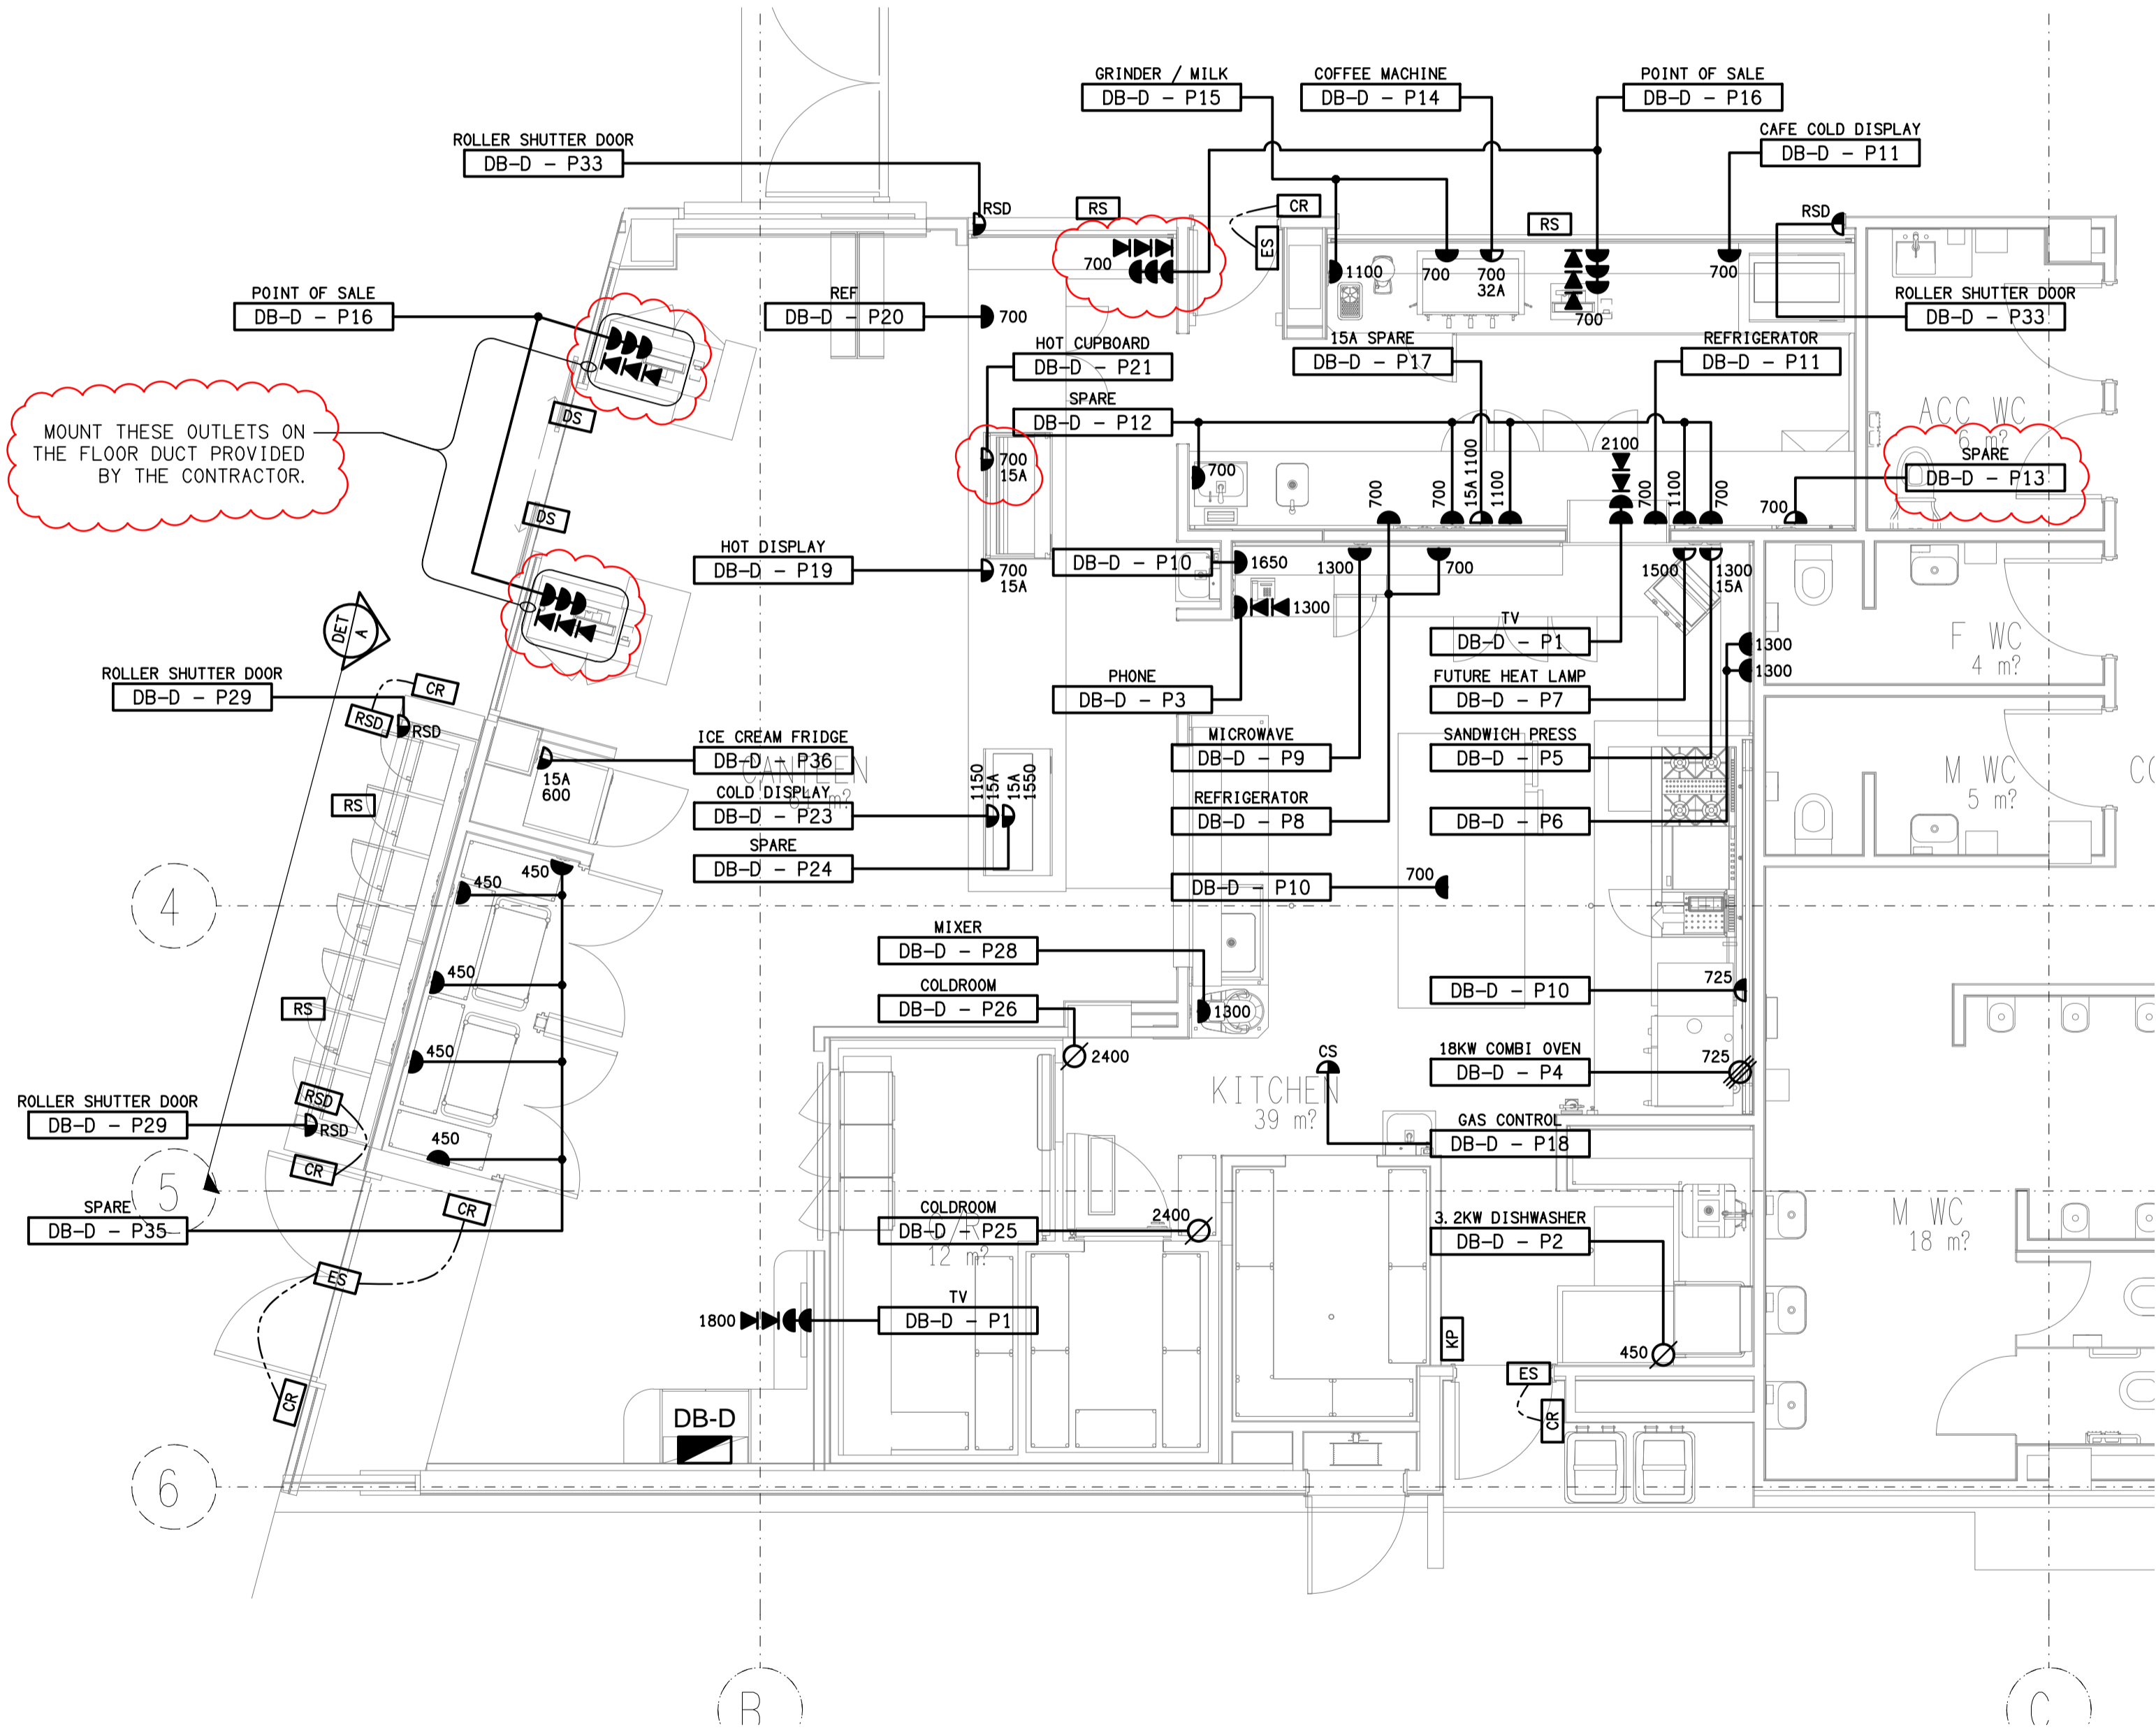

**CANTEEN KITCHEN**  
FLOOR PLAN  
SCALE 1: 50

ELECTRICAL DESIGN GROUP BRISBANE  
PTY LTD  
ACN 092 710 793  
TRADING AS:  
ELECTRICAL DESIGN GROUP

THE COPYRIGHT OF THIS DRAWING  
REMAINS THE PROPERTY OF THE  
ELECTRICAL DESIGN GROUP.  
USE FIGURED DIMENSIONS  
IN PREFERENCE TO SCALE.  
ALL DIMENSIONS TO BE  
VERIFIED ONSITE.

construction  
hospitality  
property  
**rohrig**  
rohrig.com.au

Rohrig (Qld) Pty Ltd  
ABN 67 093 753 970  
QBSA LIC NO 740842  
250 Abbotsford Road, Bowen Hills Qld 4006  
PO Box 86 Albion DC Qld 4010  
T+61 (7) 3257 4411 F+61 (7) 3257 2211  
www.rohrig.com.au

**ELECTRICAL DESIGN GROUP**  
ELECTRICAL BUILDING SERVICES CONSULTANTS  
BRISBANE GOLD COAST

P.O.Box 15, Sherwood Q.4075  
Phone: (07) 3278 4375  
Email: brisbane@edg.net.au  
Web: www.edg.net.au

PROJECT:  
**ORMISTON COLLEGE  
CENTRE FOR LEARNING & INNOVATION**

97 DUNDAS STREET WEST, ORMISTON

F	CONSTRUCTION	20/06/2025
REV.	DESCRIPTION:	DATE:

DRAWING:  
**ELECTRICAL SERVICES  
CANTEEN KITCHEN  
FLOOR PLANS**


SCALE:  
1:50

AT A1

PROJECT NO:  
**C3328a**

DRAWING NO:  
**E08**

REVISION:  
**F**

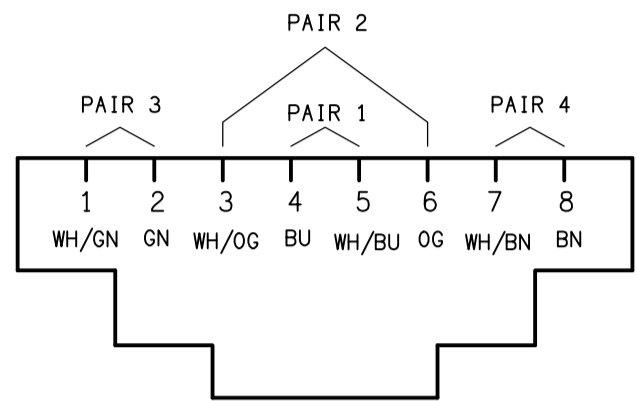

**SCHEMATIC**  
RJ45 PINOUT CONFIGURATION  
NOT TO SCALE

**EQUIPMENT:**

TEST - TEST PUSH BUTTON MOUNTED ON THE DISTRIBUTION BOARD ESCUTCHEON.

RESET - RESET PUSH BUTTON MOUNTED ON THE DISTRIBUTION BOARD ESCUTCHEON.

LAMP - AMBER TEST INDICATING LAMP MOUNTED ON THE DISTRIBUTION BOARD ESCUTCHEON.


To - ADJUSTABLE 0-3 HOUR TIMED RELAY.

Tb - 15 MINUTE RUN-ON TIMER TO OPERATE UPON THE RETURN OF MAINS POWER.

Cx - CONTACTOR x.

CRx - CONTROL RELAY x.

Rx - RELAY x.

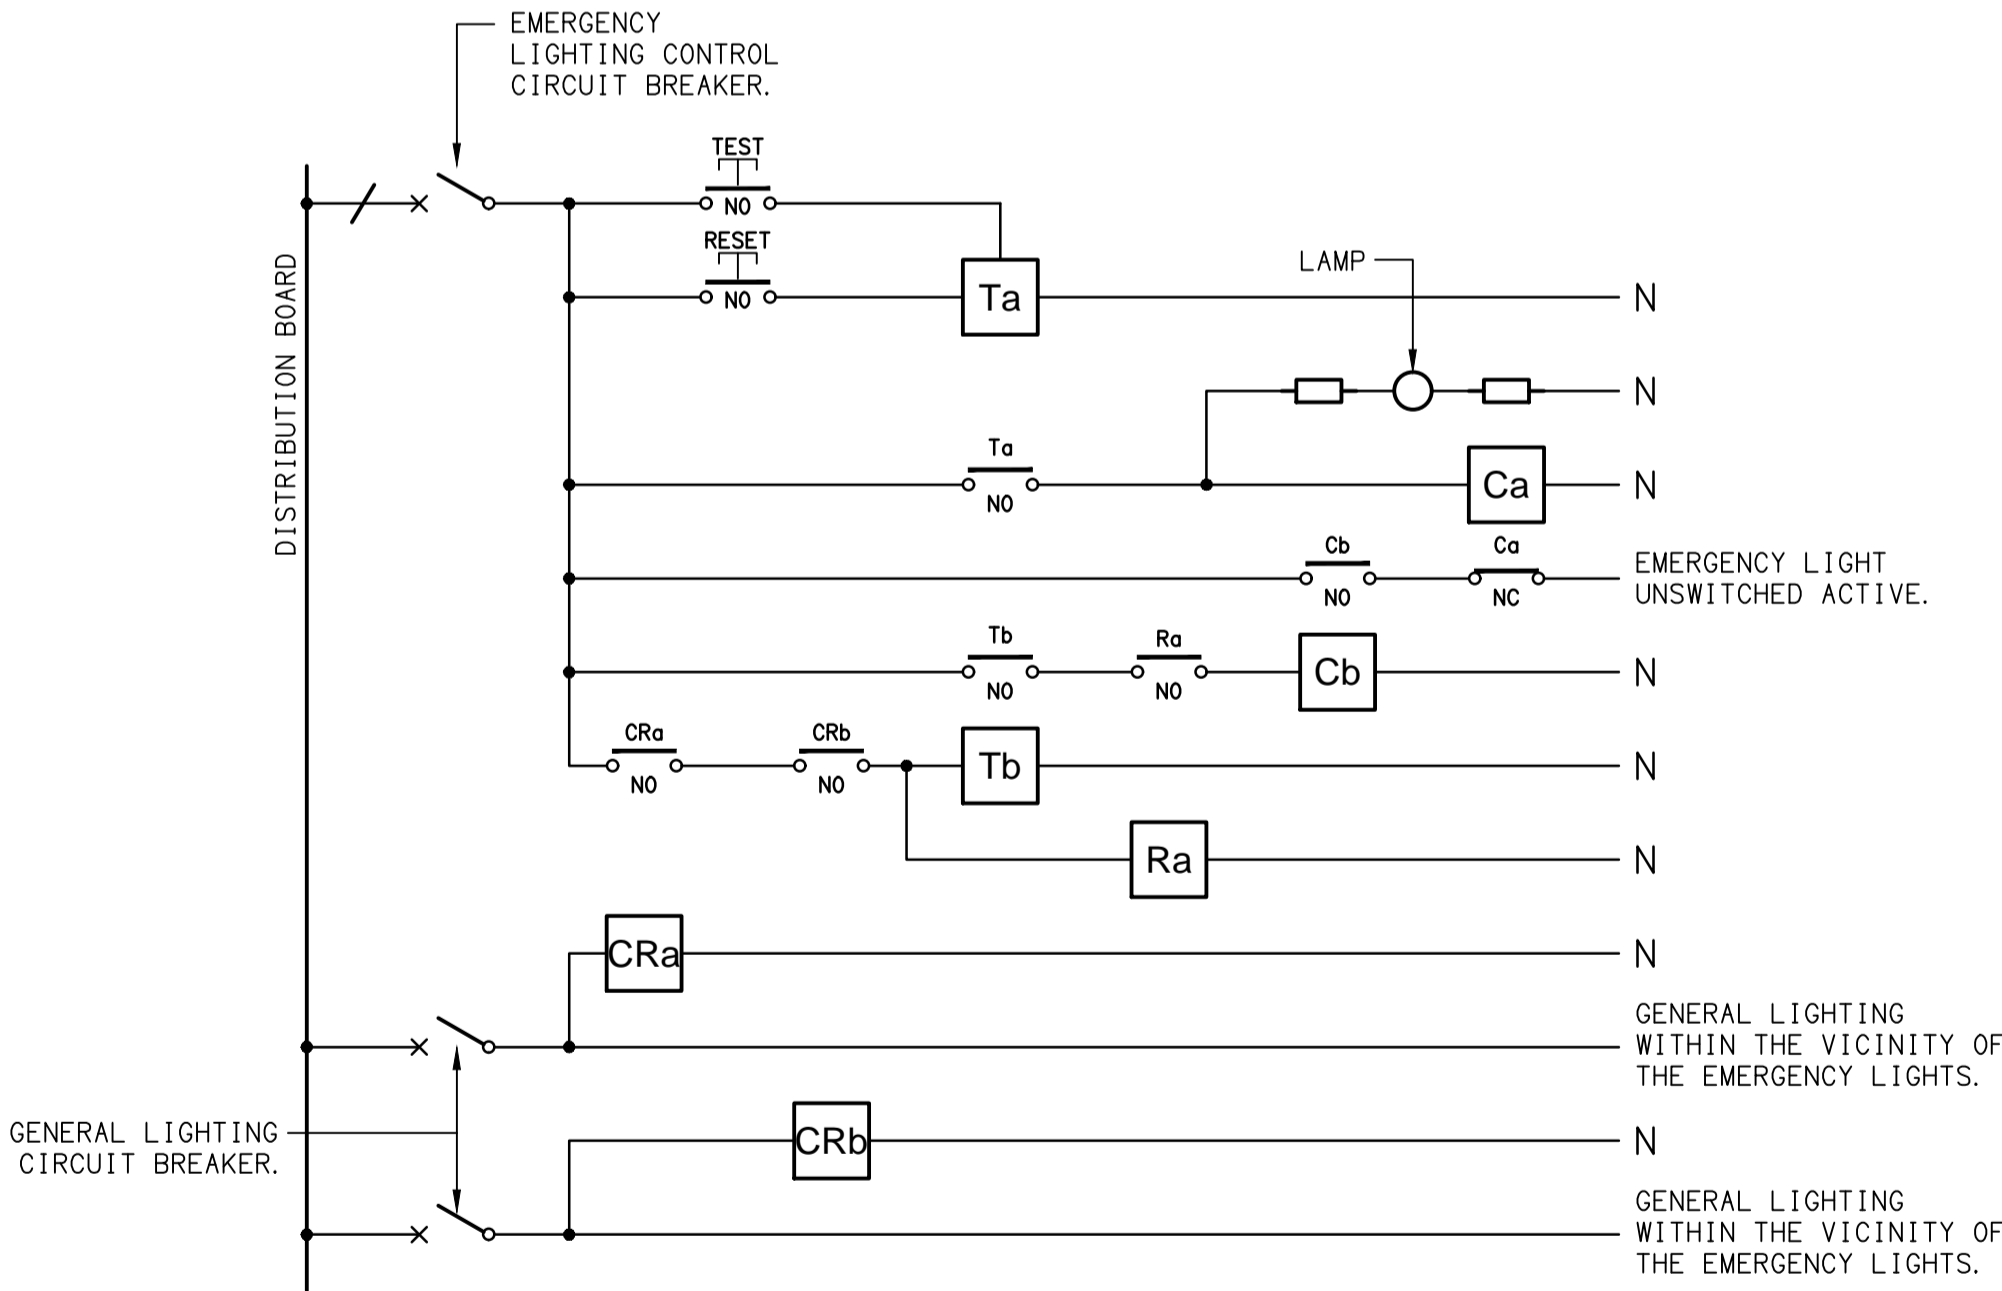


**NOTES**


1. THE EMERGENCY LIGHT UNSWITCHED ACTIVE / GENERAL LIGHTING SWITCHED ACTIVE CIRCUIT ARRANGEMENT AND CONTROL IS TYPICAL FOR ALL CIRCUITS SUPPLYING EMERGENCY LIGHTS.

2. PROVIDE ADDITIONAL CONTROL RELAYS (CRx) CONFIGURED AS PER CRa AND CRb FOR ALL ADDITIONAL LIGHTING CIRCUITS THAT SUPPLY LIGHTS IN THE VICINITY OF THE EMERGENCY LIGHTS.


**SCHEMATIC**  
EMERGENCY LIGHTING  
NOT TO SCALE

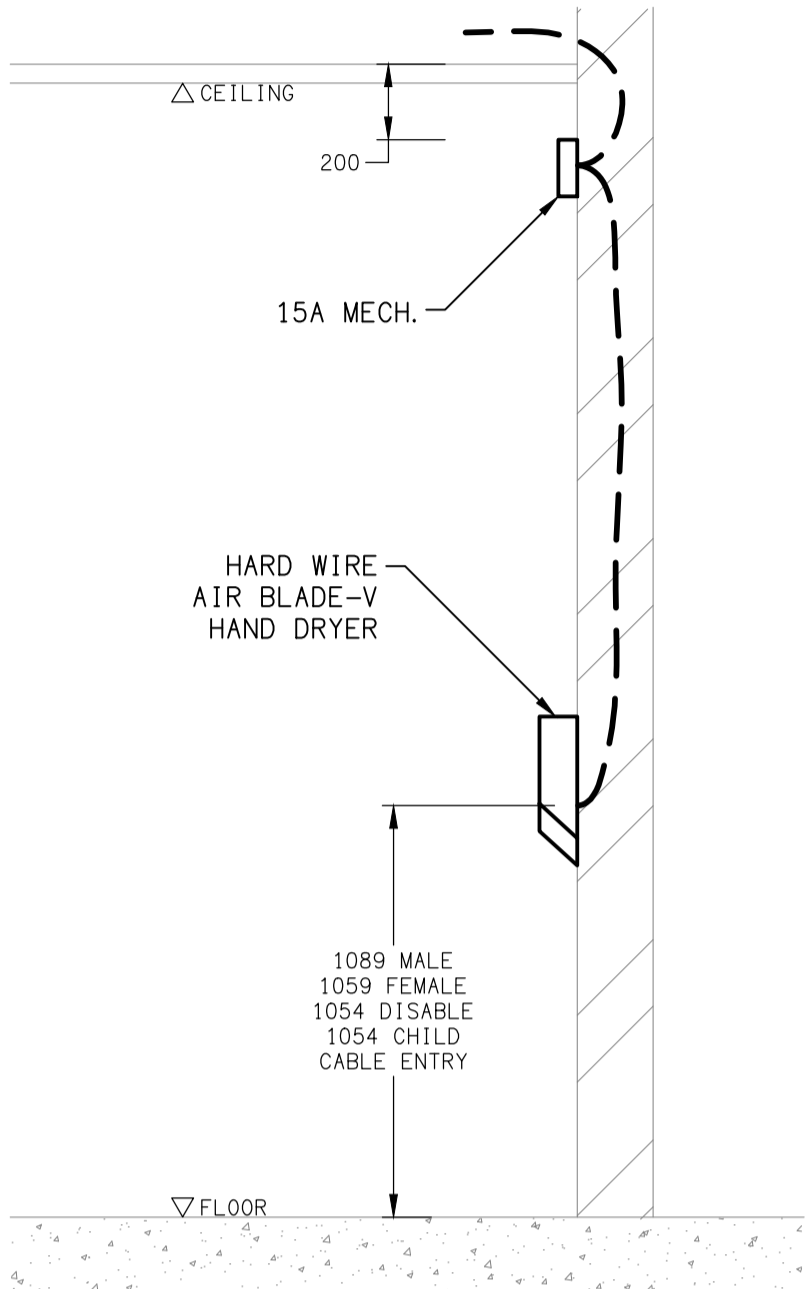

**DETAIL**  
AIR BLADE-V HAND DRYER CONNECTION  
NOT TO SCALE

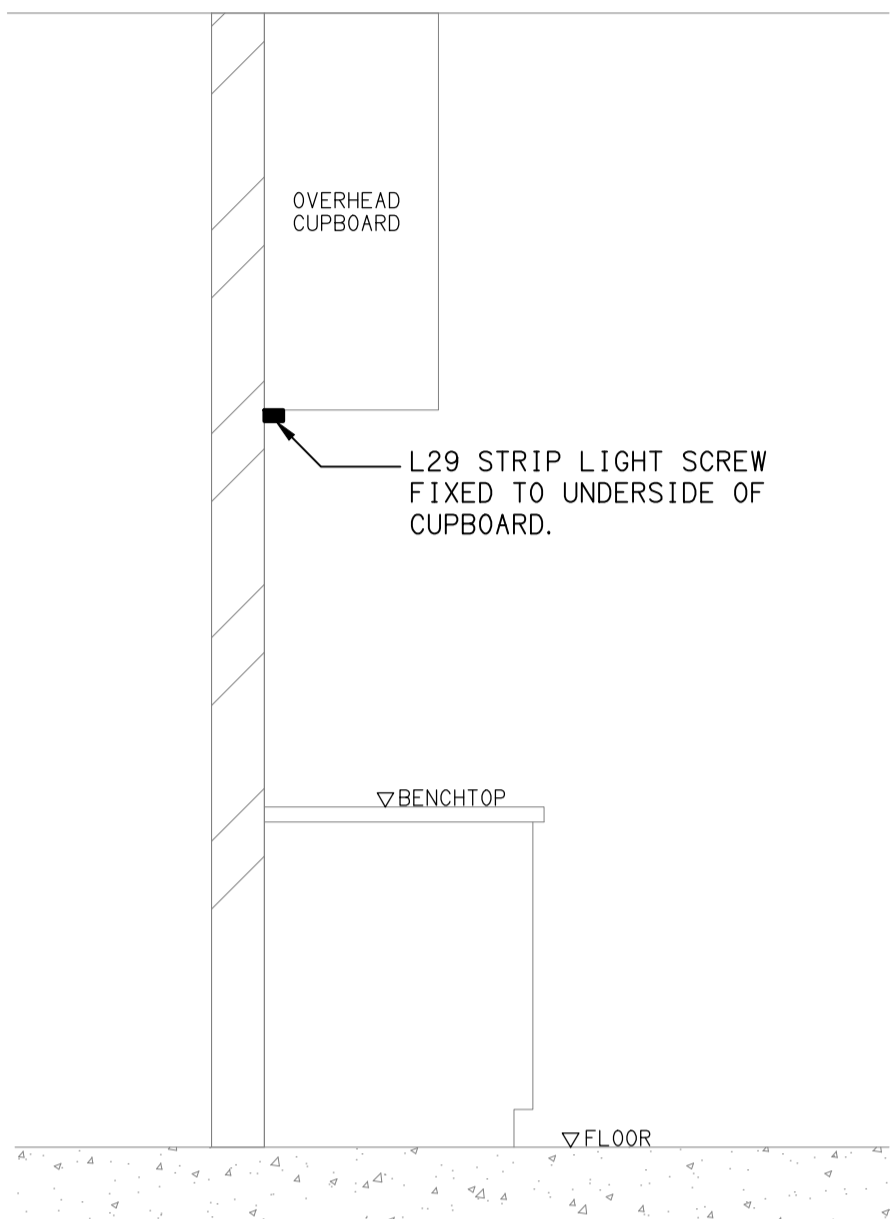

**DETAIL**  
"L29" STRIP LIGHT MOUNTING  
NOT TO SCALE

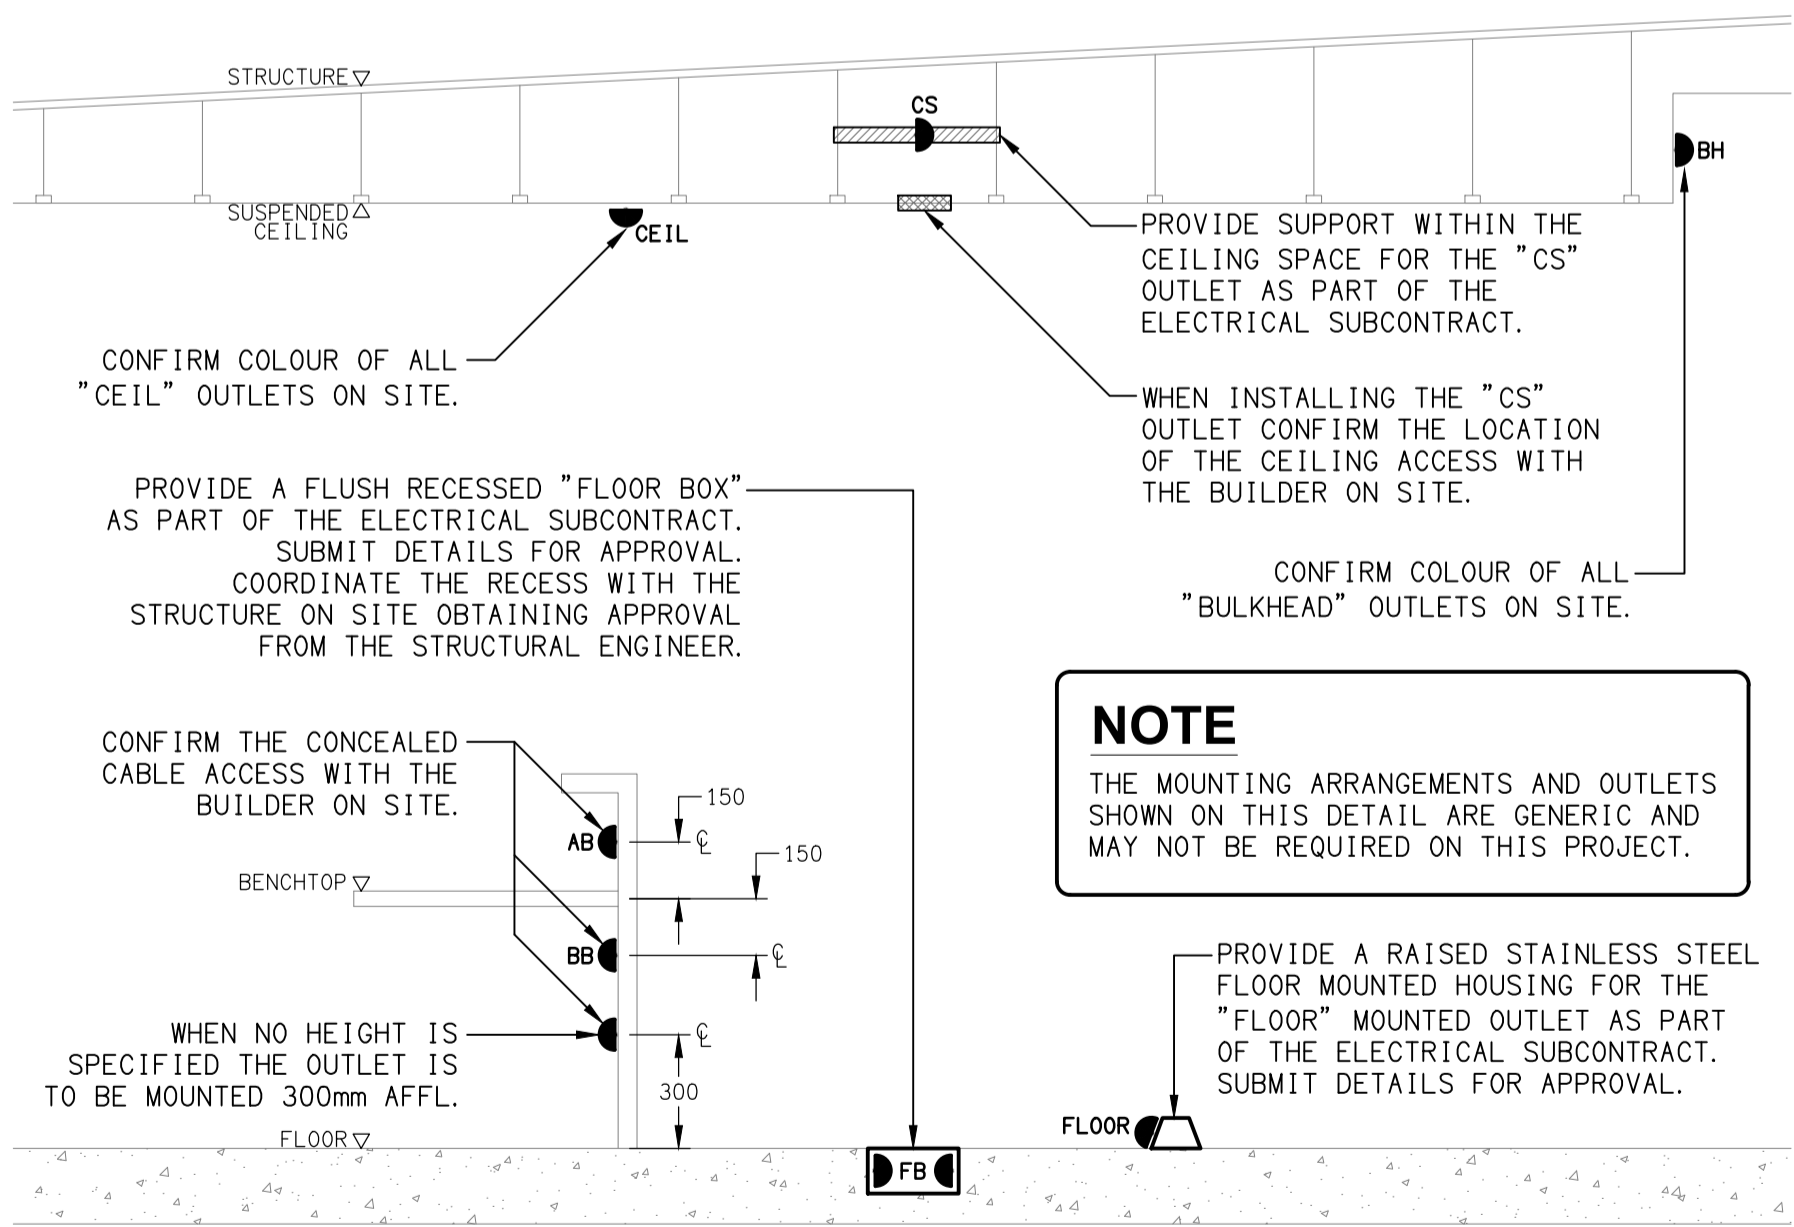

**DETAIL**  
TYPICAL OUTLET MOUNTINGS  
NOT TO SCALE

**NOTE**

THE MOUNTING ARRANGEMENTS AND OUTLETS SHOWN ON THIS DETAIL ARE GENERIC AND MAY NOT BE REQUIRED ON THIS PROJECT.

PROVIDE A RAISED STAINLESS STEEL FLOOR MOUNTED HOUSING FOR THE "FLOOR" MOUNTED OUTLET AS PART OF THE ELECTRICAL SUBCONTRACT. SUBMIT DETAILS FOR APPROVAL.

PROVIDE SUPPORT WITHIN THE CEILING SPACE FOR THE "CS" OUTLET AS PART OF THE ELECTRICAL SUBCONTRACT.

WHEN INSTALLING THE "CS" OUTLET CONFIRM THE LOCATION OF THE CEILING ACCESS WITH THE BUILDER ON SITE.

CONFIRM COLOUR OF ALL "BULKHEAD" OUTLETS ON SITE.

CONFIRM COLOUR OF ALL "CEIL" OUTLETS ON SITE.

PROVIDE A FLUSH RECESSED "FLOOR BOX" AS PART OF THE ELECTRICAL SUBCONTRACT. SUBMIT DETAILS FOR APPROVAL. COORDINATE THE RECESS WITH THE STRUCTURE ON SITE OBTAINING APPROVAL FROM THE STRUCTURAL ENGINEER.

CONFIRM THE CONCEALED CABLE ACCESS WITH THE BUILDER ON SITE.

WHEN NO HEIGHT IS SPECIFIED THE OUTLET IS TO BE MOUNTED 300mm AFFL.

ELECTRICAL DESIGN GROUP BRISBANE PTY LTD  
ACN 092 710 793  
TRADING AS:  
ELECTRICAL DESIGN GROUP

THE COPYRIGHT OF THIS DRAWING REMAINS THE PROPERTY OF THE ELECTRICAL DESIGN GROUP.  
USE FIGURED DIMENSIONS IN PREFERENCE TO SCALE.  
ALL DIMENSIONS TO BE VERIFIED ONSITE.

construction  
hospitality  
property  
**rohrig**  
rohrig.com.au

Rohrig (Qld) Pty Ltd  
ABN 67 093 753 970  
QBSA LIC NO 740842  
250 Abbotsford Road, Bowen Hills Qld 4006  
PO Box 86 Albion DC Qld 4010  
T+61 (7) 3257 4411 F+61 (7) 3257 2211  
www.rohrig.com.au

**ELECTRICAL DESIGN GROUP**  
ELECTRICAL BUILDING SERVICES CONSULTANTS  
BRISBANE GOLD COAST

P.O.Box 15, Sherwood Q.4075  
Phone: (07) 3278 4375  
Email: brisbane@edg.net.au  
Web: www.edg.net.au

PROJECT:  
**ORMISTON COLLEGE  
CENTRE FOR LEARNING & INNOVATION**

97 DUNDAS STREET WEST, ORMISTON

B FOR REVIEW 24/04/2025  
REV. DESCRIPTION: DATE:


DRAWING:  
**ELECTRICAL SERVICES  
SCHEMATICS & DETAILS**

SCALE:  
NOT TO SCALE AT A1

PROJECT NO:  
**C3328a**

DRAWING NO:  
**E10**

REVISION:  
**B**



PROJECT

**ORMISTON COLLEGE - CENTRE FOR LEARNING &  
INNOVATION BUILDING 11**

DOCUMENT

**ELECTRICAL SERVICES SPECIFICATION**

SITE ADDRESS

**ORMISTON COLLEGE  
97 DUNDAS STREET WEST  
ORMISTON QLD 4163**

HEAD CONTRACTOR

**ROHRIG CONSTRUCTIONS  
248 ABBOTSFORD ROAD  
BOWEN HILLS QLD 4010**

DESCRIPTION

**REVISION: C  
DATE: 22 JANUARY 2025**

[illegible]

C3328a-0001(C).doc

1.0 EXTENT OF WORKS

1.1 SCOPE

The electrical services sub-contract includes but is not limited to the following:

- Supply and installation of all components forming part of the electrical services.
- Attendance at a handover meeting.
- Co-ordination.
- Authorities' approvals.
- Approvals.
- Shop drawings.
- Installation drawings.
- Work-as-executed drawings.
- Inspections.
- Testing and commissioning.
- Maintenance.
- Programming.
- Manuals.
- Cabling, cable support systems and access.
- Spare conduits, wall boxes and draw wires for future use and use by other trades.
- Quality assurance.
- Power distribution.
- Lighting.
- Communication cabling.
- Security.
- PA System.
- Mobile Phone Booster System.
- AV System.
- Video System.
- All minor components and incidental works not specifically referred to, however necessary to complete the electrical services installation such that it is handed over complete, operational and fit for the intended use.

The building designation is Building 11 and all equipment / systems within the building must be designated Building 11 or 11 which is to include though not be limited to switchboards, racks, security panels etc;

With the tender response provide a copy of the Electrical Sub Contractor's licence. Include a copy of all of the above licences in the Maintenance Manual.

Accept full responsibility for liaising, arranging and co-ordination all works that have an effect on or will be affected by the electrical services.

Should the Electrical Sub Contractor not provide the information required to be submitted by this specification and the Schedule Of Information To Be Submitted within two weeks of being requested to do so or as agreed to in writing, the Electrical Sub Contractor is to agree to a variation credit of \$2,000.00 to the contract in lieu of the provision of such information.

Should the Electrical Sub Contractor not provide the Work-As-Executed drawings within two weeks of practical completion or as agreed to in writing, the Electrical Sub Contractor is to agree to a variation credit of \$2,000.00 to the contract in lieu of the provision of the Work-As-Executed drawings.

Should the Electrical Sub Contractor not provide the Operations and Maintenance Manual within two weeks of practical completion or as agreed to in writing, the Electrical Sub Contractor is to agree to a variation credit of \$2,000.00 to the contract in lieu of the provision of the Operations and Maintenance Manual.

1.2 ASSOCIATED WORKS

Co-ordinate with the relevant bodies for the following works associated with but excluded from the electrical services sub-contract. The electrical sub contractor is responsible for coordinating the interface of the electrical services with the following services:

Service	Responsibility
Cool rooms and freezers	Refrigeration services sub contractor.
Motorised roller shutters,	Contractor.
Auto Doors	Contractor.
Electric strikes and power transfer hinges.	Contractor.
Cooking and refrigeration services	Contractor or school dependant on the item
POS	School.
Active communications equipment	School.
Illuminated signage	Signage contractor
Connection of the power supply from the isolator to the sign.	Specialist signage contractor.
Mechanical Services	Mechanical services sub contractor.
Sub mains from the MSSB to the mechanical plant.	Mechanical services sub contractor.
Hydraulic Services	Hydraulic services sub contractor.
Fixed equipment such as HWS and cooking equipment.	Dependant on the equipment either the contractor, other sub contractor, specialist contractor or tenant.
Plug in equipment such as fax machines.	Dependant on the equipment either the contractor, other sub contractor, specialist contractor or proprietor.
Communications equipment fly leads.	Specialist communications contractor.
Build in sleeves, supports, hangers, fixings, anchorages and the like	Contractor
Make good after the installation of electrical services provided it is in the normal construction sequence	Contractor
Fire rated boots over recessed lights in fire rated ceilings	Contractor
Rebates/cut-outs in fire stair door jambs for electric strikes and reed switches	Contractor
Provision of penetrations through floors and walls. The electrical contractor to provide fire rating to penetrations after cables are installed if required.	Contractor
Anti-termite treatments	Contractor

### 1.3 CONTRACT DRAWINGS

The electrical services document schedule C3328a-0001.xls details the electrical drawings, details, schedules and associated documents that form part of the electrical service's sub-contract. The electrical services documents are diagrammatic only and the Electrical Sub Contractor must familiarise themselves with all other services documents and the architectural documents to establish the scope to be allowed for.

The current architectural drawings form part of the electrical sub-contract and as such information which appears on the architectural drawings which affects the electrical services will not be accepted as the basis of a cost variation. The electrical installation must be installed in accordance with the architectural drawings issued for construction.

#### **1.4 SITE CONDITIONS**

As part of the tender, the tenderer is required to familiarise themselves with all site conditions and allow for such conditions within the tender. Changes or additions due to site conditions or requirements which could have been established during a tender period site inspection will not be accepted as the basis of a cost variation.

#### **1.5 DEFINITIONS**

Refer to the section A of the architectural specification for the definitions to be read into the electrical services documents

#### **1.6 PRELIMINARIES**

Carry out all of the electrical services works in accordance with the Builder's program and the preliminaries defined in section A of the architectural specification.

#### **1.7 CORROSION AND UV PROTECTION**

Ensure that all metal surfaces are suitably protected against corrosion, and that all plastic materials are UV stabilised. Repair to new condition or replace any components showing any signs of corrosion during the defects liability period.

Ensure that all metal surfaces are suitably protected against corrosion likely to be experienced during the life of the installation. Cover all electrical terminations including terminal screws and exposed raw metal including exposed conductors with clear synthetic resin based insulating enamel before fixing the terminal covers in place. Provide all fixings exposed to the weather and those in potentially corrosive environments as stainless steel. Do not use materials that will react with or cause galvanic reactions with adjacent materials or surfaces.

Use only plastic materials, paints, insulation materials and coatings that are UV stabilised and will not break down with the normal exposure to ultra violet radiation during the life of the installation. Provide written evidence for approval that all such materials are UV stabilised. Do not install PVC in locations it will be exposed to direct sunlight.

#### **1.8 WORKMANSHIP**

Ensure that the work is performed by the holder of a current Electrical Sub Contractor license. Provide a copy of the license before commencing work onsite and include a copy in the Operations and Maintenance Manual.

Ensure the installation and all components, fixtures, fittings, outlets and cables are supplied and installed to a high standard throughout, and installed in a neat and tradesman like manner, to the current industry standards. Ensure all materials and components of a similar type are of the same manufacturer and installed in a uniform manner.

It is the Electrical Sub Contractor's responsibility to ensure that the installation is fit for purpose and is provided as a complete working installation. It is the Electrical Sub Contractor's responsibility to provide all

components, fittings, fixtures, systems, programming etc irrespective of the level detailed in the documents such that the installation is provided as a complete working installation.

Irrespective of the information documented it is the Electrical Sub Contractor's responsibility to ensure all aspects of the installation comply with and meet the requirements of all relevant authorities and the relevant current Australian Standards.

Provide all materials as new, and of the highest class available for their respective types.

It is the electrical sub contractor's responsibility to ensure all conduits are not damaged during concrete pours.

Within the tender allow to conceal all wiring and conduits. Exposed cabling or conduits are generally not acceptable. For extreme circumstances a written request to allow the running of an exposed service in a specific location may be considered. In such circumstances the Electrical Sub Contractor is to agree to a variation credit of \$1,000.00 to the contract for each exposed service.

Provide all circuits and outlets required by any control or communications equipment supplied as part of this contract, irrespective of whether these outlets and circuits are shown on the drawings. Such outlets may include, but are not limited to, the following:

- Amplifiers.
- Control panels.
- Communication and intruder detection equipment.

During the course of the building being painted, remove flush plates, light fittings and other equipment that is likely to be marred by painting and mask/cover other equipment such as switchboards and the like. On completion of the painting replace all equipment; remove masking/covers and the like. Clean off any paint marks and return the finish to as new condition.

Install components and equipment in accordance with the manufacturer's recommendations and ensure such components and equipment are not operated outside of the limits specified by the manufacturer.

Irrespective of the extent of information or the accuracy of such information it is the Electrical Sub Contractor's responsibility to confirm the location of all existing services on site. The cost of repairing and of disruption to service due to damage to existing services is to be met by the Electrical Sub Contractor.

Ensure all components, equipment and materials supplied are new, unused, designed and selected to ensure satisfactory operation under varying atmosphere, climatic, humid tropical conditions without distortion and deterioration in any part affecting efficiency and reliability of the systems. Design and select all equipment to provide the necessary safety to human life and property during operation and maintenance with particular attention given to electrical safety and segregation precautions.

Check the finished paintwork around the area of each installation and touch up all damaged parts and finishes after the installation of the electrical services.

Within the tender response provide a list of sub contractors that will be engaged by the electrical sub contractor including the postal address, fax number, telephone number and email address. Within two weeks of being awarded the contract provide the names and contact phone numbers of the electrical sub contractor's supervisor and site foreman as well as the supervisor and site foreman of each of the sub contractors that are to be engaged by the electrical sub contractor.

Provide an electronic digital photograph for approval of all works that are carried out that will not be visible after installation, within five working days after the respective work has been completed. Each photograph is to be electronically stamped with the time and date and be either named with descriptive name that allows the location to be simply identified or accompanied with a tabulated description. Include a copy of the photos in the in the Operations and Maintenance Manual.

## **1.9 PROGRAM**

Carry out all of the electrical services works in accordance with the Builder's program.

Where a component or document is noted as requiring to be submitted for approval, it is the electrical sub contractor's responsibility to obtain in writing the approval of such from the engineer unless the approval is specifically noted as being required from another entity. The electrical sub contractor must give each of the approving parties one week's notice of the pending requirement for the approval and give each approving party a minimum of two working days to respond. Should an approval not be given it is the electrical sub contractor's responsibility to revise the material being submitted for approval and resubmit such material. The re-submission of material for approval does not constitute grounds for an extension of time.

#### **1.10 ACCESS**

Allow to provide all necessary access to install and complete the electrical services irrespective of the electrical services access provisions detailed on the drawings. The electrical services access provisions detailed on the drawings are not intended to be comprehensive or provide all of the access requirements necessary to complete the electrical installation. This includes though is not limited to the following:

- Conduits.
- Blockouts.
- Ducts.
- Risers.
- Hat sections.
- Covers.
- Cable trays and ladders.
- Chasing.
- Cutouts.
- Pits and trenching.

#### **1.11 ALTERNATIVES**

Alternative components and design will be considered with the cost of the consideration being borne by the Electrical Sub Contractor. Any alternative may be rejected without a reason being provided. Alternatives which are used without written approval must be removed from the installation and replaced with the complying item at the electrical sub contractor's cost.

#### **1.12 DEFECTS**

Should more than two defect inspections due to poor workmanship, be required to be performed by the electrical engineer the cost of such inspections will be passed on to the electrical sub contractor. The approval of the contract payment will be dependent upon the rectification of such defects and the settlement of the respective inspection costs.

When advice of a defect is received by the electrical sub contractor provide written advice within 24 hours of the date the defect will be rectified.

The expiration of the warranty period does not exclude the contractor or the electrical sub contractor from the responsibility of latent defects discovered after the warranty has expired.

#### **1.13 ANOMALIES**

It is a requirement that the tenderer allow for within the tender, the most expensive solution to address anomalies which may exist between any of the drawings, the drawings and the specification or between any of the contract documents and an authority requirement or a relevant Australian Standard. The Electrical Sub Contractor is to identify any anomalies and request in writing a direction on which option to proceed with. Any such direction will not constitute grounds for a variation or an extension of time.

#### **1.14 APPROVALS**

Where information has been nominated as requiring to be submitted for approval or the information must be approved, apply the following definition:

Each request for approval must be made in writing, accompanied with all necessary supporting information to allow for the prompt assessment of the request.

It is the Electrical Sub Contractor's responsibility to seek approvals and do so in a timely manner with the understanding that approvals may not be given and the request for approval may have to be modified and resubmitted. Delays in submitting requests for approval and resubmitting revised requests for approval will not constitute grounds for an extension of time. Unless advised otherwise the Electrical Sub Contractor must allow one working week for the approval to be given by each approving entity.

#### **1.15 CUSTOMER ACCEPTANCE**

At the conclusion of the installation a preliminary walkthrough with the installation contractor and the customer's representative will be performed to check for installation quality, accurate performance of the work, and to verify the accuracy of work-as-executed documents. Complete any modifications to the documentation or the installation that may be required within a 2 week period from the walkthrough. Customer Acceptance will be given following a final walkthrough with the installation contractor and the customer's representative if all previously identified issues have been addressed.

If the Electrical Sub Contractor has advised that the previously identified issues have been addressed and it is found they have not been, the Electrical Sub Contractor is responsible for meeting the costs of subsequent customer acceptance inspections at the rate of \$200.00 per hour plus GST plus disbursements. The walk through will be scheduled within 3 weeks of the completion of the installation in order to turn the project and documentation over to the end user. Please note that "Customer Acceptance" does not release the Contractor from repairing any cabling errors or improperly labelled circuits, caused by the Contractor that may be discovered at a later date.

#### **1.16 HANDOVER**

Within two weeks of the contract being awarded, the contractor's site foreman and the Electrical Sub Contractor's site foreman are both required to attend an electrical services handover meeting for a duration that will not exceed three hours. The time and location will be confirmed by the Electrical Design Group. The contractor's site foreman and the Electrical Sub Contractor's site foreman are both required to confirm in writing to the Electrical Design Group that they will be attending the handover meeting. The intention of the handover meeting is to review the following information, answer any questions and identify any potential issues:

- How the electrical services design is documented and the purpose of each document.
- The services available on the Electrical Design Groups web site.
- The communication process and channels used by the Electrical Design Group.
- The relationship between the electrical services documents and the other discipline documents.
- The client's expectations of the electrical services.
- An overview of the contractual arrangements.
- A summary of the unusual contractual requirements within the electrical services.
- Identify any areas and items that may be subject to further design development or change.
- Identify any electrical services authority requirements.
- Summarise the major risks and or difficulties within the electrical services.
- Review the design of each system within the electrical services identifying the design critical components and components within the design that are open to the contractors input.
- Review the layout of each system within the electrical services identifying the design critical areas and layouts that are open to the contractors input.
- Summarise the major areas of coordination and the coordination requirements.

Prior to the hand over meeting the contractors site foreman and the Electrical Sub Contractor's site foreman are both required to have reviewed the electrical services documents. The Electrical Sub Contractor's site foreman is required to bring a full size set of the current electrical services documents to the handover meeting. Others such as the Client, Architect, Contractors supervisor and Electrical Sub Contractor's supervisor are encouraged to attend the handover meeting, though not considered essential. If the Electrical Sub Contractor's site foreman do not attend the full duration of the handover meeting the contractor agrees to a credit variation of \$1,000.00 to cover the costs of the aborted handover meeting and the handover meeting is to be rescheduled.

## 2.0 QUALITY REQUIREMENTS

### 2.1 STANDARDS

Irrespective of information contained in the electrical services documents or in instructions, it is the electrical sub contractor's responsibility to ensure all electrical services works are be installed in accordance with the requirements of the following. Refer any discrepancies between the requirements of the following and/or the electrical services documents and instructions to the Architect for clarification prior to the placing of orders, fabrication or installation of the items/methods in discrepancy.

- NCC Building Code of Australia.
- Electricity Act.
- Electrical Safety Act.
- Workplace Health and Safety Act.
- Telecommunications Act.

Unless specifically detailed within this specification, undertake all works to the requirements of the relevant standards included in the Standards Schedule C3328a-0003.xls. Refer any discrepancies between the following standards and or the specification to the Architect for clarification prior to the placing of orders, fabrication or installation of the items/methods in discrepancy.

It is the electrical sub contractor's responsibility to obtain from all equipment and component suppliers confirmation that the equipment and components supplied as part of the electrical services installation comply with all of the following relevant standards and codes. Specific specification of equipment or a component does not alleviate the electrical sub contractor of the aforementioned requirement.

Keep on the site a copy of AS3000, AS3008, AS2293.1 and AS2293.2.

### 2.2 AUTHORITIES

Ensure all of the electrical services comply with the requirements of all regulatory authorities having jurisdiction over the site including but not limited to the following authorities, codes, standards and regulations:

- ACMA.
- Local Council.
- Local Supply Authority.
- State Government Department of Environment and Heritage.
- Queensland Department of Justice and Attorney-General, Workplace Health and Safety Queensland
- Queensland Health
- Queensland Department of Justice and Attorney-General, Industrial Relations
- Building Regulations 2006
- Fire and Rescue Services Act 1990
- Building Fire Safety Regulation 2008
- Queensland Electricity Act
- Queensland Electricity Regulation
- Queensland Electrical Safety Act
- Queensland Electrical Safety Regulation
- Queensland Development Code
- Queensland Fire and Rescue Service (QFRS)
- Queensland Electricity Connection and Metering Manual
- SAA Communications Cabling Manual
- AS/NZS 3000 SAA Wiring Rules
- The building certifier.
- Queensland Sustainable Planning Act and Regulation 2009
- Queensland Building Act 1975
- National Construction Code (NCC) Building Code of Australia (BCA).

If any of the responsible Authorities, pursuant to the statutory powers vested in them, elect to perform, supply, inspect or test wholly or part of the works, make all necessary arrangements and co-ordinate with the Authorities.

Provide "for approval" copies of all Authorities' Approvals.

Pay all relevant authority fees and charges necessary to complete the electrical services installation to leave it in operating condition meeting all of the authority requirements.

## **2.3 CONTRACTOR DOCUMENTS**

### **2.3.1 SHOP DRAWINGS**

Before commencing fabrication or erection of the nominated item, submit an AutoCAD 2000 format electronic copy of detailed shop drawings via compact disc or via email to [brisbane@edg.net.au](mailto:brisbane@edg.net.au) for approval. Prepare all drawings as A3 or A1 size to AS1100, AS1102, AS1103 and AS3702 with information detailed at the following minimum scales:

- Layout Drawings: 1:100
- Site Plans: 1:500
- Equipment Assembles: 1:50

Ensure the shop drawings include the following information:

- General arrangement of all equipment: Include layout and clearances around equipment.
- Mounting details, structural details and calculations verifying the structural efficiency of load-bearing slabs, etc., footings and the like, supporting electrical equipment mounting structures, poles, lighting masts, etc.
- Supports: Details of equipment and cable support brackets and fixings including mountings.
- Physical cable layouts: Showing arrangement, location and identification of interconnecting wiring and cabling. All cable penetrations, connections and terminations details. Include all forms of conductors such as Bus Bars and Bus ducts.
- Labelling: Details of labelling and engraving.
- Earthing.
- The type, rating and capacity of all equipment and components.
- Comprehensive schematic diagrams showing the configuration and operation of all components.
- Co-ordination details with all other services.
- Plant Room Layouts.

### **2.3.2 WORK-AS-EXECUTED DRAWINGS**

Prior to practical completion, provide for approval the following Work-as-Executed Drawings:

- Reticulation Drawings.
- Layout Drawings.
- Schematic Drawings.

Ensure the Work-as-Executed Drawings include the following information:

- All information required by the shop drawings.
- Comprehensive details on the reticulation for all of the Electrical Services including:
  - Support types and locations.
  - Conduit types and locations.
  - Junction Boxes.
  - All cable locations.
  - Circuiting.
- Comprehensive details on the layout of all outlets, fittings and equipment of all of the Electrical Services including:

- Outlet types and locations.
- Equipment types and locations.
- Mounting Detailing.
- Cross reference to the onsite labelling and numbering of all components and outlets.

Submit an AutoCAD 2000 format electronic copy of the work-as-executed drawings via compact disc or via email to [brisbane@edg.net.au](mailto:brisbane@edg.net.au) for approval.

## 2.4 MAINTENANCE / BUILDING TUNING

Undertake all necessary maintenance of the electrical installation during the Defects Liability Period for a period of 12 months.

Carry out periodic inspections and perform maintenance work at the frequencies and following the procedures recommended by the manufacturers of the supplied equipment with at least one visit each three months. Promptly rectify all faults. Replace faulty materials and equipment, including luminaire lamps, and accessories.

In addition to the above maintenance requirements repeat the complete commissioning process three months, six months, nine months and twelve months from the date of practical completion.

The defects and liability period will not end until such certification has been approved.

## 2.5 DOCUMENTATION

### 2.5.1 OPERATIONS AND MAINTENANCE MANUAL

Within ten working days prior to practical completion, provide an electronic copy of combined Operations and Maintenance technical manuals for approval, written in clear concise English, containing the following data in the following format:

Within ten working days of receiving approval of the combined Operations and Maintenance technical manuals, provide the two copies of each of the approved combined Operations and Maintenance technical manuals.

Within ten working days of practical completion, provide the two copies of a combined Operations and Maintenance technical manuals, written in clear concise English, containing the following data in the following format: A typical combined Operations and Maintenance technical manual is available for download and editing from the Electrical Design Group web site [www.edg.net.au](http://www.edg.net.au).

- Contents.
- Project details.
  - Description of the project and the electrical services sub-contract.
  - Description of the major components of the electrical services sub-contract.
  - Description of the manual and its intended use.
  - Contact details of the electrical sub contractor and each of the major suppliers.
- Licences and certificates.
  - Copies of all licences, certificates and statements of compliance as required by the specification.
- Operating instructions.
  - Provide an overall description of the operation of the electrical installation.
  - Describe the safe working procedures of the electrical installation.
  - Detail the environment that must be maintained for the safe and satisfactory operation of the electrical installation.
  - Detail the specific operating requirements for each component of the electrical installation.
  - Include a reference to the following government website for Electrical Safety at Work information.  
<http://www.justice.qld.gov.au/fair-and-safe-work/electrical-safety/business-and-industry/electrical-safety-at-work#cords>

- Include a copy of relevant first aid hints.
- Maintenance instructions.
  - Include a description of the general maintenance requirements for the electrical installation.
  - Include a description of the safe working procedures for the maintenance of the electrical installation.
  - Detail the specific maintenance requirements for each component of the electrical installation.
- Lighting.
  - Provide a detailed description of the lighting installation.
  - Include any information associated with the lighting installation required to be provided by the specification such as programming and aiming details.
  - Provide a schematic of the lighting control system detailing the catalogue number of each component. Provide a schedule of the lighting control system reconciling the control channels against the items controlled, the associated circuit and identify all spare capacity.
  - Provide a schedule of each light fitting, the fitting manufacturer, catalogue number and lamp type.
- General electrical components.
  - Provide a schedule of each general electrical component, the component manufacturer and catalogue number. This schedule does not include light fittings or the power distribution components.
- Power distribution.
  - Provide a detailed description of the power installation.
  - Include any information associated with the power installation required to be provided by the specification such as programming and aiming details.
  - Provide a schedule of each component of the power installation, the component manufacturer and catalogue number. This schedule is to include switchgear.
  - Provide a copy of each switchboard schedule.
- Work-as-executed drawings.
  - Provide a hard copy and an electronic copy on CD ROM in AutoCAD 2000 format. For all A1 and B1 drawings provide an A3 set as well as the full size set.
- Emergency lighting.
  - Describe the emergency light installation and the statutory operation and maintenance requirements.
  - Detail the individual manual test features of each emergency light fitting.
  - Detail the AS2293 group test feature.
  - Provide a copy of an emergency lighting maintenance log book similar to the GLS publication available from Caribou Sales Phone (07) 3891 1112. Complete the entries in the emergency light maintenance log book.
- Test results.
  - Include all test results required to be provided by the specification.
- Communications cabling.
  - Provide a copy of the schematic layout of the communications cabling detailing the catalogue number of each component and how each component is connected.
- Security.
  - Provide a copy of the schematic layout of the security system detailing the catalogue number of each component and how each component is connected.
- PA System.
  - Provide a copy of the schematic layout of the PA system detailing the catalogue number of each component and how each component is connected.

Provide the manuals as A4 size, machine printed or typed on durable printing paper, with each page consecutively numbered, and neatly bound in a permanently labelled durable white vinyl covered ring binder folder. Securely fix a labelled CD containing all of the information in the manual including Auto CAD files of all drawings.

## 2.6 LAYING OUT

The positions of outlets, switches, and equipment shown on drawings are diagrammatic only. Check on site for positions and verify locations and mounting heights with the architect. When any relocating is required to conform to the above, undertake such relocation without additional costs. Verify locations of all outlets, switches, and equipment to ensure:-

- The work of any other trade does not interfere with the electrical installation.
- They are not shrouded by door swings and tracks, furniture or equipment.
- They conform to any pattern formed by ceilings, panels, tiles, beams, and the like.
- They are not located in restricted zones as defined by AS3000. It is the Electrical Sub Contractor's responsibility to check the volume of all sinks, tubs and basins.

Promptly report any anomalies, for consideration and instructions. Work proceeding without obtaining approval, will not be accepted as basis for a variation.

Locate all adjacent outlets at the same height and ensure power and non power outlets are segregated by 150mm.

## **2.7 OPERATING PARAMETERS**

Ensure the electrical services installation is installed in accordance with the following operating parameters and service conditions:

- Nominal voltages:
- Line: 400-volt
- Phase: 230-volt
- Frequency: (Hz): 50Hz
- Number of phases: Three
- Number of wires: Four
- Neutral Connection: Star Point
- Earthing System: MEN
- Ambient air temperature range: (°C): -5°C to 40°C
- Maximum relative humidity: (%): 90%

## **2.8 QUALITY ASSURANCE**

Establish and maintain records which give evidence that the trade works has passed inspection and/or test with defined acceptance criteria and submit one (1) copy of all such records within seven (7) days of completion of the relevant work.

Allow approved representatives the right to verify at source or upon receipt that the purchased product conforms to the specified requirements. Such verification will not absolve the Electrical Sub Contractor of the responsibility to provide acceptable product nor will it preclude subsequent rejection.

Ensure a quality system is planned, established, implemented and maintained according to the requirements of AS9002 for and during the carrying out of the Services.

Allow approved representatives appointed as a Quality System Auditors the right to undertake a quality assurance audit. Provide access and all necessary assistance to the Auditors in order to demonstrate compliance with the requirements of the quality standard.

Review and analyse the cause of any deficiency revealed in the report of an audit by the Quality System Auditors and develop and implement or procure the development and implementation of corrective action to prevent recurrence.

## **2.9 LABELLING**

Permanently label and individually number all components, fixtures, fittings, outlets and cables installed as part of this contract such that they can be quickly and accurately identified. All labels must be permanent with the type and size of label appropriate to the location and conditions. The label type must be appropriate for

weathering, UV exposure, vandalism and mechanical damage. Stick on and hand written labels are not acceptable. The numbering and identification is to be consistent and consecutive for all items. Provide matching labelling and numbering where an existing numbering and labelling system exists. Submit all labelling types, identification schemes and numbering schemes for approval. Ensure all labelling is clearly identified and cross-referenced in the manual and on the work-as-executed drawing. Double sided tape is not acceptable as a method of securing labels.

- Power outlets and light switches with clip-on faceplate / surrounds are to have the circuit identification labelled by using indelible ink in a concealed location under the clip-on faceplate / surround on the screw fixed plate.
- Isolators and power outlets and light switches that do not have clip-on faceplate / surrounds (such as weather proof outlets) are to have the circuit identification labelled by engraving with a contrasting infill colour on the faceplate of all power outlets and isolators in a permanently visible location. Such engraving is not permitted to be located on clip on faceplates / surrounds. If the entire faceplate is clip on then the label is to be provided as a screw fixed trefolite panel engraved with a contrasting infill colour mounted immediately above the outlet.
- Communication outlets are to have the circuit / channel identification labelled by engraving with a contrasting infill colour on the faceplate of all outlets in a permanently visible location. Such engraving is not permitted to be located on clip on faceplates / surrounds. If the entire faceplate is clip on then the label is to be provided as a screw fixed trefolite panel engraved with a contrasting infill colour mounted immediately above the outlet.
- All exposed labels and identification method are to be identical in type and style.

## 2.10 KEYING

Ensure all of the lockable enclosures provided as part of the electrical installation are keyed alike and keyed as part of the sites master key system. Where enclosures are required to be accessed by authorities, key the enclosure to the authorities' requirement.

## 2.11 INSPECTION AND WITNESSING

Arrange for and give sufficient notice so that inspection for approval may be at the following stages:

- Concealed conduits: Prior to concrete pours, etc.
- Cables laid: After laying underground cables and before and after laying protective covering and marker tape.
- Roughin: Cables have been installed in walls and the ceiling space before the like has been sheeted.
- Connection: Connection of cabling and wiring.
- Factory testing of all control panels and switchboards.
- Factory inspection of all custom made components.
- Earthing: Installation and connection of earthing system.
- Acceptance: Installation ready for acceptance.
- Inspections required by Regulatory Authorities prior to their approval of the installation or its stages.
- All testing and commissioning.

To prevent any abortive factory visits, the manufacturer is to provide written evidence, including appropriate certification, that testing has been carried out to the required specification prior to the factory visit. As part of the factory testing and commissioning all operational, functional and safety sequences are to be simulated and checked. Should the factory testing and witnessing have to be repeated due to the manufacturer failing to provide the required written evidence or appropriate certification and or failing to carry out the testing prior to the visit, the Electrical Sub Contractor is to agree to a variation credit of \$2,000.00 to the contract per repeated factory test.

The manufacturer is to undertake the following prior to the factory visit:

- Undertake all required tests and ensure that signed test sheets and relevant product documentation and certification are in place.
- Obtain copies of the latest design specification and drawings
- Confirm the 'as built' drawings incorporate the latest modifications to the design drawings.

- Wire external switches on a temporary basis to simulate operational conditions for testing. Note that external switches and ports can be connected for test purposes.

## **2.12 TESTING**

Arrange for and give two week's notice so that, the tests may be witnessed for approval.

Undertake on site the following tests:

- Insulation resistance measurements: On motors and major medium voltage equipment items, at 1000-volt D.C.; on cables and wiring.
- Functional checks: Full functional and operational checks on energised control equipment and circuits, including adjustments for the correct operation of safety devices.
- Motor rotation: Checking and where necessary altering connections for the correct motor rotation.
- Earth resistance.
- Earthing: Confirmation of effective earthing of the exposed metal of electrical equipment.

During testing, replace fuses and equipment damaged as a result of incorrect installation work.

Provide all Test Results for approval within one (1) week of the test being undertaken on A4 paper and as an electronic PDF file copy on CD for approval.

Check control systems for correct operation under representative operational conditions. During the commissioning period these conditions may not arise because the building is unoccupied, and it is difficult properly to verify the performance of seasonal variations in control strategies. Control systems should therefore be checked when the building is occupied. In addition, illuminances cannot be checked until the space is completely fitted out and furnished. Representative operational conditions will often involve checks at dusk and/or night time.

The extent and frequency of post-occupancy checks should be included in the control system specification as part of the contract between the building owner and the construction supply chain and will depend on the nature and complexity of the control system. Lease documents should support any contractual requirements for post-occupancy evaluation and ensure that the leaseholder is required to provide reasonable access for their performance.

Post-handover checks comprise a continuation of functional checking relating directly to the lighting control system. Where a central control system is implemented, use should be made of its logging functions and the ability to display trend logs once it is confirmed that they are operating accurately.

## **2.13 COMMISSIONING**

Commission all components of the electrical services to ensure the correct interfacing operation and control of all systems to the satisfaction of the engineer as per the approved commissioning method statement and commissioning plan. Arrange for and give two week's notice so the commissioning may be witnessed for approval.

Provide all necessary software, equipment and personnel to fully program and configure all systems to the satisfaction of the architect.

Following the completion of the commissioning and prior to Practical Completion thoroughly clean all components of the electrical installation to the satisfaction of the engineer.

Following commissioning, operate each component and system at the convenience of the engineer to the satisfaction to provide evidence to the engineer that each component and system is working correctly.

A record of all settings, set point and offsets should be maintained throughout the commissioning period and included in the Operations and Maintenance Manual. Update the Operations and Maintenance Manual record following the completion of each of the post practical completion commissioning requirements. The defects and liability period will not end until the Operations and Maintenance Manual has been updated.

As part of the commissioning process ensure the following actions are completed:

- Check that time schedules enable the intended operation at the correct times.
- Check that the specified routine to ensure unified time clocks throughout the complete control system operates correctly.
- Check for the correct control and operation on start-up and shutdown. Check that the defined restart routine operates correctly when power is reinstated after failure. Check for any specified sequenced start-up to accommodate high loads.

Check the control system to confirm its specified operation following a mains power supply failure. In particular undertake the following checks:

- Check that controllers preserve control strategy configuration data for a specified period when the mains power is lost.
- Check that the condition of any volatile data protection system is regularly and automatically monitored. Check that an alarm is raised on loss of data by any controller or other device and/or failure of the monitoring system.
- Check that the control system operates correctly under generator standby and UPS power if applicable,
- Check that the control system will automatically return to normal action without operator intervention restoration of the mains electrical power supply.
- Check that any specified load shedding procedures operate correctly.

The manufacturer is to check all switchboards and control panels at the factory. Specific items or routines to be checked include though is not limited to:

#### Visual outside

- The finish to ensure there are no sharp edges.
- The metalwork: hinges on doors, flush doors, opening and closing doors, no sagging or drooping of doors when open, interlocking of doors.
- The door seals and gland plate gaskets are in place and securely fixed.
- The common key for all panels.
- For secure operation of door locks.
- That safe access to the control equipment is possible without having to isolate the control panel where specified.
- That the physical arrangement of the panel will allow transport to site and mounting in the final location.
- If the completed panel weighs more than 50kg check that eyebolts are fitted.
- The location and labelling of switches and indicators (including colour).
- That plastic rivets or screws are used to mount labels.
- The scale of analogue devices and the status of digital devices.

#### Inside

- That all doors on any panel containing exposed dangerous voltages are provided with interlocking isolators so that the door cannot be opened except with the isolator in the 'off' position.
- That equipment that requires on-line adjustment and testing by non-electrically qualified personnel is accessible and usable without interrupting the supply or overriding the safety interlocks. (In general, outstations must not be located within control panels where isolation is necessary to gain access.)
- Access for incoming cables
- Access for outgoing power and control cables

- Provision of suitable gland plates
- All doors/gland plates to be earthed by cable links
- Bus bars and power cabling as specified
- Anti-condensation heaters and thermostats are included and correctly set where specified
- Ventilation grills, filters and fans and thermostats are included and correctly set where specified
- Panel ventilation is adequate for the heat load
- Tightness of all connections, bolted power connections and bus-bar bolts tightened to the correct torque
- Neatness of cable looms with no pinching
- Sufficient spare capacity in all cable trunking to comply with BS 7671(13).
- Colour coding and numbering of all cables where specified and corresponding with numbering of terminals.
- Numbering of all terminals
- Shrouding and labelling of non-isolated equipment
- Shrouding of switches, lamps etc on doors if low voltage
- Segregation of power cabling and switch-gear from control cabling and electronic equipment
- Trunking lids cross referenced
- Connections between panel sections are numbered as specified, accessible and physically simple to connect/disconnect.
- Link type terminals for control system cables if specified
- Spare fuses and fuse ways if specified
- Drawing holder
- Fuses (type and ratings) against fuse chart
- Layout of equipment against drawings
- Ensure spare back panel space is provided as specified
- Ensure no equipment is mounted on the bottom or sides of the panel (similarly terminations) unless back/side plates are fitted
- Labelling of equipment in panel
- Access to all equipment especially devices requiring adjustment
- Power outlet is provided complete with 30 mA RCD protection
- Flexible looms connecting door mounted to interior mounted components will not weaken or break with repeated door opening. Check that the loom is arranged to avoid pinching or looping when the door is closed and is fully supported at each end.
- Screen and earth connections associated with the control system equipment comply with the manufacturer's installation requirements

#### General Function test

- The lamp test facility, if specified.
- Wiring interlocks by progressively energising or de-energising relay contacts, switches, timers etc in each circuit. Switches must be used to test that the system operates correctly in response to input signals.
- All indicators and signals out of the panel, e.g. those used to switch items of plant or to send status signals to the control system. Safety interlocks, e.g. coil freeze protection and fire overrides, must be checked in 'manual', 'off' and 'auto' switch modes.

#### Typical starter/power circuit

- Fuse or circuit breaker frame size, trip unit type and settings against the drawings.
- Correct labelling has been provided.
- Energise the starter/contactors by 'making' the control circuit and ensure the starter operates correctly and that power is provided to outgoing terminals.
- Trip the starter and check that it de-energises and the trip indicator lights up.

All switchboards and control panels are to undergo on site checks including though not limited to the following specific items or routines:

- If the control panel is left on site for a long period then undertake adequate steps to ensure that it is protected from dirt, damage and moisture (e.g. by the use of anti-condensation heaters). Remove and store separately sensitive electronic components.
- Check all new connections into the panel and the interlocks re-checked before the power is switched on and is operated.
- Do not hand over the panel until it has been wired in and fully functionally tested and the testing has been witness and approved by the engineer.
- Perform a complete panel test on-site if the panel has not been tested in the factory, or if a multi-section panel has been received on-site having been split for shipment.

All wiring is to undergo though not be limited to the following checks and testing:

- Cable type as specified
- Cable identified at both ends
- Cable cores identified at both ends if not self numbered or colour coded
- Security of fixing/protection of cables to walls etc where surface-run
- Cable carrier/container in accordance with the specification (tray, basket, conduit/trunking etc)
- Cable management in accordance with the specification
- Cables not damaged
- Secure termination of wires (using ferrules)
- Screening continuity
- Cable only earthed at one end (field controller) or as specified
- Electrical continuity ('belling out')
- Correct polarity where applicable
- Correct input/output (by briefly disconnecting cable)
- Correct and secure termination
- Separation of mains and signals cables
- No short circuits line-to-line and line-to-earth
- Volt-free contacts are volt-free (prior to the installation of the field controllers).

Undertake including though not limited to the following on site communications network checks and tests:

- All network devices such as routers and bridges are installed correctly.
- All control devices can be addressed over the communication network.
- When used in conjunction with an office IT network ensure that permission has been granted from the IT manager. All network data routing is correctly set up by the IT department including allocation of the appropriate TCP/IP addresses and default router addresses.
- For structured cabling systems ensure that all outlets are properly labelled and assigned. Ensure that any changes to the cabling system are reflected in the updated documentation.

Undertake including though not limited to the following on site insitu field control devices (controllers, outstations and unitary controllers etc) checks and tests using NATA approved testing equipment:

- Type as specified
- Size as specified
- Enclosures as specified
- Number and location (height, access) as specified
- Adequate mechanical fixing
- Identification by mnemonic labelling
- All cables terminated and identified
- All terminals used (check that any unused terminals are intended to be spare)
- Continuous power available and of an appropriate quality
- Fuse correct type/spares if specified
- Hardware configuration agrees with the specification
- All printed circuit boards in place

- All connection cables plugged in
- Document wallet containing wiring diagram where appropriate, i.e. when located in a control panel

## 2.14 TRAINING

Provide the operator with sufficient training such that they are capable of understanding how the system operates as a complete system and how the controls work as part of the system.

Beyond time spent during commissioning stage, at times to be agreed with the operator, instruct the operator's staff in the recommended methods of operation the electrical services. Allow to provide two such operational training sessions on site each for duration of 2 hours.

Provide the basic operator training such that following the training an operator with this level of training will have a basic understanding of the control system architecture and have the ability to view point data. It is not expected that the operator will make any alterations to the system. The basic operator abilities include;

- call up and view point data from schematics and/or points lists
- acknowledge system alarms
- view trend logs

In addition to the operator training above at times to be agreed with the operator, instruct the operator's maintenance staff in the recommended methods of operation and maintenance of the electrical services. Allow to provide two such operation and maintenance training sessions on site each for duration of 2 hours.

Ensure the maintenance staff training includes the following information:

- A review of the Operations and Maintenance Manual.
- The types of luminaries used.
- The correct types of lamps to be used for each luminaire type.
- The correct type and location of all consumables used within the electrical installation. This is to include though not be limited to lamps, indicating lamps, fuses, surge protection devices etc.
- Advised maintenance cycles.
- Access for maintenance.
- The location of spares.
- The location of switches.
- Basic trouble shooting and fault finding techniques.

### 3.0 INSTALLATION REQUIREMENTS

#### 3.1 NOT USED

#### 3.2 CABLES

##### 3.2.1 INSTALLATION

Unless otherwise specified, install and terminate cables in accordance with the manufacturers' recommendations. Unless noted otherwise joints are not acceptable. Install power wiring utilising the loop-in, loop-out system with joints in cables being affected at outlets.

Ensure oil, wax and powder based electrical cable lubricants are not used as cable lubricants. If cable lubricants are required to be used then use polymer-based for copper cables and silicon-based for optical fibre cables.

Remove redundant equipment and wiring, including that in accessible ceiling spaces, and make good exposed surfaces before commencing the installation of new wiring.

Handle cables so as to avoid damage to insulation and serving or sheathing. Replace all wiring with insulation damage after determining and removing the cause of damage.

Identify multicore cables and trefoil groups at each end and at crowded intermediate points by means of stamped, non-ferrous tags, clipped around each cable, or trefoil group.

Install and adequately support fixed wiring as specified throughout the installation. In accessible false ceilings, keep cables clear of all ceiling insulating material and/or removable ceiling tiles by securely fixing the cabling to permanent structural members. If the structural members are more than 1,200mm above the suspended ceiling, provide a catenary support system. It is not allowable to fix cables to the ceiling hangers.

Provide flexible connections or an approved form of vibration/movement isolation on the terminations of all cables that will experience vibration or movement under their normal operation.

Cable installation in areas where there are motors and/or generators shall comply with the guidelines set out in AS/NZS 3548 and AS/NZS 2834.

##### 3.2.2 GENERAL CABLING REQUIREMENTS

The terms wiring and cabling are used interchangeably throughout this contract to refer to any cabling types and relevant standards.

Ensure all of the electrical services cabling comply with the following requirements:

- All cables are installed without joints.
- All cabling is concealed from view.
- All cabling installed externally is installed in conduit.
- All cabling that is installed in locations that are not concealed such as on exposed roof trusses, are to be run in conduit.
- Cabling fixed to trusses and beams in concealed ceiling spaces is to be fixed to the side of the truss / beam and not on top of the bottom cord of the truss / beam.
- Chasing of masonry walls is co-ordinated with other trades. Horizontal wall chases must be approved.
- Coordination of the installation of conduits and cables in the ceiling space does not interfere with the operation or maintenance of any equipment.
- Cables do not come into contact with hot water pipes.
- Above suspended ceilings, all conduits and cables are secured to the ceiling support members or roof structure above. Conduits and cables laid directly on the ceilings (on the ceiling suspension system or framing) are not acceptable.
- All cables in underground conduits are approved by the manufacturer for external underground use.

- Enclose cables from above down to switches, outlets and equipment in conduits where the equipment is installed on single leaf masonry walls or concrete walls. TPS power cables where installed in cavity walls may be unenclosed within the cavities, unless otherwise detailed.
- Cables are secured to prevent any strain on the cable terminations. Support cables at a maximum of 1200mm spacing with minimum sag.
- The use of spring clips will not be permitted without approval.
- Do not install double insulated cables in locations where they can not easily be withdrawn for rewiring purposes. Where double insulated cables are installed in accessible locations such as cavities, stud partitions and the like, do not clip or secure the cables such that they can not be withdrawn.
- Double insulated cables are installed in conduits where they are installed within cement render, masonry walls or concrete slabs.
- External cabling is installed underground where installed between buildings, connecting signs, luminaries and the like.
- Catenaries are provided between cable trays and access conduits.
- Where cables traverse areas above set plasterboard ceiling (or similar) particularly in an office environment and providing access difficulties, use conduit secured to a catenary wire, or suitably saddled to the ceiling.
- Support all horizontal cabling via a dedicated catenary, cable tray, cable ladder, or via a structurally secure cable support system specifically installed to support cabling. All cable support systems must be submitted for approval. It is not acceptable to use double sided tape, stick on hangers to support cables or to support cables from the ceiling support system or any other services support system.
- All cables entering wall cavities are to enter vertically above the outlet position and the access into the cavity allows for simple withdrawal of the cable and the simple installation of a second cable of equal size.
- Do not run cables horizontally through walls. Where such runs are necessary, (half height walls), use corrugated conduit to facilitate the cable run to the outlet or switch. Indicate the extent and location of all cables reticulated horizontally through walls.
- All cables passing through a metal surface, any sharp surface or any surface that could damage the cable insulation over the life of the installation is to be protected by grommetted nylon bushes.
- Replace all wiring that contains kinks or abrasions.
- Provide all final connections from the wall box or isolator in flexible smooth wall PVC conduit to equipment. Enter the isolator with flexible conduit from the underside thus forming a drip loop and neatly install such conduit to minimise retention of grease, etc.
- The cable sizes indicated on the drawings are provided as a minimum only. The current capacity, voltage drop and fault capacity of the cables must be established by the Electrical Sub Contractor and the cables sized accordingly by the Electrical Sub Contractor. Size all cables to accommodate the respective loads, starting currents and maintain a spare capacity of 10%. All loads and fault levels must be confirmed on site by the Electrical Sub Contractor with the actual equipment being supplied.
- Unless otherwise approved, terminate copper conductors to equipment, other than small accessory and luminary terminals, by means of compression-type lugs of the correct size for the conductor, compressed only by the correct tool.
- Loom and lace together, with PVC straps, all conductors from within the same cable or conduit from the point of cable sheath or conduit termination to the terminal block. Neatly bend each conductor to enter directly into the terminal tunnel or terminal stud section, allowing sufficient slack for easy disconnection and reconnection.
- Provide flexible connections on the terminations of all cables that would experience sufficient stress/force under a bolted line fault condition that would cause damage to the cable termination or the equipment.

Provide mechanical protection of all cables in the following locations:

- Within 2,400mm of any floor, platform or landing that is accessible under normal operation and routine maintenance.
- All locations it is reasonable to expect that the cabling would be interfered with.
- All locations the cable could be subject to damage during normal operation and maintenance.

Provide all power and lighting cabling in accordance with the following:

- All T.P.I and T.P.S power and lighting wiring is to utilise stranded copper conductors with a minimum size of 2.5 mm sq with 0.6/1kV V90 PVC insulation .
- Ensure all power and lighting wiring and cabling utilises stranded copper conductors.
- Ensure all wiring is provided and installed in such a manner that it's installed overload rating exceeds the overload rating of the protective device.
- For fixed power wiring, colour the conductor insulation or, if this is not practicable, slide not less than 150 mm of close-fitting coloured sleeving to each conductor at the termination points as follows:
  - Active conductors in single phase circuits: RED.
  - Active conductors in polyphase circuits:
    - A PHASE - RED
    - B PHASE - WHITE
    - C PHASE - BLUE

### 3.2.3 SETTING OUT OF RETICULATION

The routes shown on the Drawings are approximate only. Determine the final routes to suit the building structure or site conditions. Unless otherwise specified, conceal and protect cables and conduits. Arrange cables and conduits parallel with walls, ceilings and floors.

### 3.2.4 WIRING IN CONDUIT

Complete and permanently fix the conduit run before installing the wiring. Use draw wires to pull in the conductor groups from outlet to outlet. For vertical conduit runs in excess of 15m make adequate provision for supporting the weight of the wiring to avoid insulation damage. Run circuits originating at different distribution boards in separate conduits.

### 3.2.5 TERMINATIONS

Terminate all cables installed as part of this contract. It is the Electrical Sub Contractor's responsibility to check and ensure the component or equipment the cable is being terminated to be appropriate and suitable for the cable to be terminated to. Advise the architect of any concerns with the component or equipment prior to the cable being terminated.

Where core identification is required, fit to each core durable numbered ferrules permanently engraved with numbers and/or letters to suit the specified connection diagrams. Terminate and identify any spare cores into spare terminals, if available; otherwise neatly insulate and bind the spare cores to the terminated cores.

Insulation displacement terminations or connections are not acceptable for 240 volt cabling. All 240 volt terminations must be screw type.

## 3.3 CONDUITS

Ensure all conduits installed as part of the electrical services are installed in accordance with the following requirements:

- Corrugated conduits are not permitted in any food preparation, food storage or food serving area.
- Conduits are sized to permit drawing-in of cables to finished conduit runs without damage to cables.
- Protect all PVC conduits against UV exposure.
- Steel and galvanized conduit are not installed underground.
- Rigid UPVC conduit fittings are fastened to the conduits by fresh solvent cement in accordance with the manufacturer's recommendations. The cement is to be a contrasting colour to the conduit.
- Corrugated UPVC conduit fittings may be fastened with solvent cement as above or by use of snap-lock connectors in accordance with the manufacturer's recommendations.
- Flexible smooth wall PVC conduit fittings of the black nylon conduit clamp band type are provided.
- Conduits, pipes and conduit fittings are not visible on any wall, floor or ceiling surface with the exception of Switch rooms, Plant rooms and risers.
- Installation of conduits enables wiring to be drawn in and out at any future time without damage to the building and cabling and without disruption of the conduit continuity.

- Only conduit, deep draw-in boxes and couplings are to be cast in concrete. Do not cast conduit tees and elbows in concrete.
- Constant supervision at all times is provided when concrete containing conduits is being poured.
- Conduits passing through expansion joints are provided in concrete slabs with approved flexible expansion couplings.
- Conduits with expansion joints are provided as required to accommodate the expansion of the conduits and the supporting surfaces with a minimum of an expansion joint in straight runs at intervals of no more than 12,000mm.
- Unless noted otherwise provide conduit located internally as PVC light duty (LD), high impact rigid, minimum size being 20mm circular. Corrugated PVC conduit shall not be used unless approved.
- Unless noted otherwise, provide conduit located externally as PVC heavy duty (HD) conduit and stamped "underground" type.
- Conduit adaptors are lock nutted into metal wall boxes or welded into PVC boxes.
- Conduits, fittings and welding solution of the same manufacture are used.
- All change directions of conduits are set. Undertake setting by warming the conduit and bending around an internal spring. Ensure burn marks are not visible as a result of warming. Cold bending is not permitted. Secure conduits within 50mm of each change in direction.
- Secure 40mm or larger conduits every 500mm or less. Secure conduits less than 40mm every 300mm or less.
- Conduit ends above ceilings at right angles are set in the direction of the cable run.
- Conduit ends are cut square and free from sharp edges, burrs, and the like.
- Where subject to mechanical damage, exposure to sunlight, weather and/or damp conditions and/or ambient or contact temperatures exceeding 60 degrees Celsius, use heavy duty galvanised screwed steel conduit. Provide mechanical protection to UPVC conduit for a height of not less than 3m above ground or platform level.
- Where PVC conduit is embedded in concrete which is screeded or vibrated after pouring, or where conduits may be subjected to heavy traffic prior to concrete pour, provide constant supervision by a tradesperson to ensure that conduits are not damaged.
- All conduits are installed in concrete slabs above the bottom layer of reinforcement and securely tied in place. Boxes are firmly fixed to the formwork.
- Groups of conduits in slabs are separated by a distance equal to the diameter of the conduit/s. Obtain approval prior to installing conduits greater than 40mm OD in concrete slabs.
- Proprietary sealing caps (or aluminised flashing tape if sealing caps are not manufactured) are fixed to all conduit ends prior to the commencement of pouring of slabs, laying of bitumen, gravel, and the like and are to remain in position until the conduits are finally terminated.
- All conduits cast into a concrete slab, protrude perpendicular 100mm above the surface of the slab and are located as close as practicable to a wall.
- Prior to the installation of wiring, ensure conduits are clear of debris and liquids.
- All underground electrical conduits and conduits/pipes for special services (including spares) are sealed internally to approval at switchboards and/or at special services enclosures and where entering buildings to prevent the ingress of water.
- Metallic saddles with corrosion protection equal to hot dipped galvanizing with two galvanized fixings per conduit saddle are used to secure all surface mounted conduits. Do not use explosive-powered or similar equipment unless approved. Ensure the metallic saddles and fixings do not create a galvanic reaction with the support structure. In locations it is not practical to use saddles, submit details of the proposed conduit securing method for approval prior to commencing installation of the conduit. Any alternative conduit securing method must provide corrosion protection equal or better than galvanizing.
- UPVC conduits installed in accessible roof spaces and the like are protected by timber battens.
- Up to the commercially obtainable conduit lengths of run, conduits are installed without joints. Remove all jags, burrs, and sharp edges from each length before completing each conduit joint. Fit moulded plastic screwed bushes to the free ends of metallic conduit runs before installing the conductors.
- All inspection fittings and the like are accessible.
- Draw-in boxes are provided at suitable intervals not exceeding 30m in straight runs, and at intervals not exceeding 25m in other runs including directional changes.
- Conduits are not run in topping slabs unless approved.
- After removal of sharp edges, burrs, etc., ends and joint threads of steel conduits are painted with a rust-inhibiting metallic paint, which maintains conductivity.

- Standard size wall boxes of the same material as the conduit are used. Where special size boxes are specified and where such boxes are not obtainable in UPVC, use pre-fabricated metal boxes.
- Galvanised steel water pipe may be used for cable enclosures buried in the ground or run in concrete trenches or the like. Seal joints against the entry of water or moisture. Associated fittings will be either galvanised steel, cast iron or approved non-ferrous metal.
- Round off sharp edges and provide PVC bushes or the like for cable entries into metallic ducting.
- All conduits and ducts on cool room panels are mounted on 25mm stand offs.
- Arrange conduits below 2,700 AFFL such that a person cannot hang from or climb from the conduit by using the conduit as a foot hold or hand hold.
- All PVC conduits located externally above ground to a height of 2,000mm AFFL are protected with 1.6mm thick folded galvanised sheet steel hat section. Galvanized conduit may be substituted in the above ground location in lieu of the PVC conduit and steel hat section.
- Where the conduit is in an exposed location, paint the exposed conduit and hat section to match the building colour.
- All conduits are installed such that any moisture in the conduit drains away from the electrical connections. Where required provide the conduits with weep holes and drip loops.
- All conduits are installed and sealed such that insects can not nest or seek refuge in them.
- All conduits are sealed such that the sealant can be removed in the following locations to prevent vermin and moisture entering through the conduits:
  - Conduits passing between different functional parts of the building such as food preparation areas, plant rooms, service areas and public areas.
  - Conduits passing between levels.
  - Conduits entering or leaving the building.
- Do not use conduits smaller than 20mm diameter in any circumstance or conduits smaller than 25mm diameter underground.
- Do not use light duty (MD-UPVC) conduit underground or where it may be exposed to mechanical damage or to sunlight.
- Ensure all associated plastic conduit fittings are of the same material as the conduits.
- Install conduits so the installation can be wired using the 'draw-in loop-in' principle.
- Provide power circuit conduit s so the power circuit wiring is drawn in only at outlets and the initial conduit entry point.
- Install conduits directly from the entry point to the termination point, with the minimum number of sets ensuring the number bends does not exceed the equivalent of 3 x 90 degree bends.
- Do not install elbows, tees, etc. in inaccessible locations.
- Cap all conduits during construction.
- Do not run conduits in roof spaces directly below the thermal insulation or sisalation.
- Do not run conduits in roof spaces or ceiling spaces directly on top of the ceiling.
- Provide deep pattern wall boxes securely fixed such that the front edge of the box is no more than 10mm behind the wall finish.
- Do not install wall boxes across the junction between different wall finishes.
- Provide all plastic wall boxes with threaded brass inserts for securing the flush plates.
- Do not use wall boxes with sliding type lugs for attaching flush plates.
- Earth all metal wall boxes.
- Run conduits within concrete slabs such that they are securely fixed to the reinforcing rods and pass above a single layer of rods or between a double layer of rods, generally midway in the thickness of the slab.
- Space parallel conduits within concrete slabs more than 75mm apart.
- Arrange conduits within concrete slabs such that cross overs are avoided and the number of conduits in one location is kept to a minimum.

Rectify all damage caused by flooding or vermin ingress that has occurred as a result of the conduits not being correctly sealed. Any such damage post practical completion is to be considered a latent defect and must be rectified as such.

### 3.4 PENETRATIONS

Seal all penetrations in a neat and tidy manner in such a way that the sealing material can be removed to allow future use of the penetration. Ensure all penetrations are sealed to at least the original integrity of the member or structure being penetrated. Provide independent certification of all fire rated and sound rated penetrations. Do not penetrate fire rated finishes, structural members, acoustically rated finishes or damp courses without approval. Run pipes entering a building at ground level under the waterproof membrane and vertically penetrate the membrane and the floor slab. Provide a suitable seal between the pipe and the roofing material.

Fit a UPVC sleeve for each penetration through ground floor slabs, ground floor beams and external walls for cables not enclosed in conduit. Provide a penetration of diameter 10mm greater than the pipe or sleeve diameter for pipes and sleeves penetrating existing external walls, ground slab, or ground floor beams.

Provide all electrical penetrations into refrigerated enclosures as rigid conduit extending a minimum of 50mm beyond each side of the refrigerated panel. Seal inside and outside of the refrigerated panel around the conduit with Sikaflex. After the cabling has been installed, seal around the cable within the conduit with Sikaflex. Ensure all penetrations into outlets, switches and fittings within refrigerated enclosures are waterproof.

In all locations where underground conduits pass under a building or structure, provide flexible conduit with a smooth interior for 300mm each side of the transfer to accommodate movement of the building or structure. All such conduits are to be similar to Vindex Coreflow conduit.

Provide all outlets and switches flush mounted within floors, walls and ceilings that have an acoustic rating with additional protection to achieve the same acoustic rating as the base structure. Provide a copy of an independent certification for approval of the additional protection that the required acoustic rating is achieved with the installation method and components employed. Provide a copy of the certification in the maintenance manual and indicate the location of all such additional protection installations on the as build documents. Surface mounted wall blocks are not acceptable as methods of achieving the required rating if the outlet / switch has been specified as flush. If additional furring channel and or wall / ceiling sheeting is required that is not part of the base design all such additional materials must be included as part of the tender price.

Provide ceiling roses or flush faceplates with a cable gland to trim all cables penetrating a wall or ceiling that are to be connected to equipment that is bracket mounted that does not inherently accommodate concealed cabling.

### **3.5 ACCESSORIES AND FITTINGS**

Provide all accessories and fittings in accordance with the following requirements:

- All switches and outlets provided are of a like appearance, flush set sized at 115 x 70mm.
- Switch flush plates are mounted with the 115 dimension orientated vertically. Outlets are mounted with the 115 dimension orientated horizontally.
- All accessories shall be flush mounted rocker action type. Use red switch toggle marker 'dots' on GPO's but not on light switches. Provide accessories as white in colour unless specifically detailed otherwise.
- Flush plates are installed plumb and fit hard against wall surfaces. Wall boxes are used for masonry and concrete walls and proprietary mounting accessories for "stud" type partition walls.
- Switches and power outlets in exposed locations and in areas such as plant rooms are provided as IP56 rated light grey in colour with one piece covers where available.
- All wall boxes specified for future use are provided with blank flush plates.
- Instructions for final positions of all outlets and switches are requested at least ten working days in advance.
- Relocation of outlets and switches is allowed for at a maximum of 1.5m without additional cost, providing chasing is not required.
- Outlets, switches and accessories are installed to suit tiling and surrounding fixtures. The mounting heights shown on the electrical services drawings shall be taken as indicative only.
- All accessories are to be flush mounted installed in wall boxes.

- Supply of all outlets mounted within the joiners or nominated as being mounted below bench via surface duct run within the joinery is allowed for. Allow to mount all such outlets on surface mounting blocks. Coordinate the location of the duct and the outlets on site with the joinery. If the installation permits counselled cabling and flush mounted outlets do not install the surface duct or mounting blocks.
- All suspended equipment provided is mounted off a raked ceiling with an adjustable ceiling mounting such that all suspended equipment hangs vertically.
- All fittings and accessories installed in refrigerated rooms and enclosures must be non ferris.
- All mechanisms and blank mechanism fillers are to be screwed fixed in place on the rear of the faceplate.

### 3.6 EARTHING

Provide a comprehensive earthing system throughout the project addressing all aspects of the structure, all services, all systems and components in addition to those forming part of the power distribution.

Run a PVC-insulated copper conductor from the buildings main protective earth bar to the slab reinforcing mesh. Clamp conductor to mesh (one point of contact only required) with a brass earth clamp. Wrap clamp and exposed copper conductor with insulation tape. Provide a label engraved 'Slab Reinforcing Mesh Bond' adjacent to the termination on earth bar.

Copper conductor is to penetrate slab inside building enclosure and be such as to avoid moisture penetration to slab reinforcing mesh.

Bond the electrical earth to all piped services (if metallic pipes) at the closest practical point to where these piped services enter the building. This includes cold water, hot water, soft water, steam, condensate return, waste, medical gases, suction and the like. The bonding earth conductor to be 6 sq. mm minimum.

### 3.7 ACCESS

In non-habitable locations such as plant rooms and store rooms provide cable access to surface mounted electrical equipment such as switchboards, control panels, intruder detection panels and communication equipment by surface mounted PVC or metal duct. Provide the duct with a removable lid of lengths not exceeding 1,200mm and arrange the duct such that it runs square with the building. Silicon seal between the duct the wall, the floor and the ceiling. Cover all conduits entering through the floor with such duct. Where the duct abuts the boards/panels provide neat cutouts free of burrs in the duct and boards/panels to allow cable access. Where the duct does not adjoin the boards/panels provide cable glands in the duct and the boards/panels for all cable access. Ensure all of the cables run within the duct are supported vertically and horizontally to the cable manufactures requirements and as a maximum such supports are not to exceed 1,200mm. Provide or paint the duct to match the wall colour.

### 3.8 CATENARY SUPPORTS

Provide catenary supports in accordance with the following requirements:

- Use catenary wire as a minimum as seven strands galvanised steel wire.
- Catenaries are anchored and supported to the ceiling slab or structural members and tensioned by way of 2 wire clamp turnbuckles fixed in place by Dynabolts with a minimum size of 6mm.
- Where the cable loading is excessive for catenary wire or saddled enclosures, use tray/ladder.
- Catenary wire is supported by jack chain or similar at distances of no more than 3 metres. Do not use ceiling hangers as support for catenaries or cabling.
- Where cables leave a catenary, they must be supported in PVC conduit and/or PVC ridged and/or flexible conduit and/or an additional catenary and then the conduits. The conduits will be fastened to the catenary and then at every change of direction in a workmanship like manner. Corrugated conduits should not lay about in ceiling spaces.
- Attach an earth to the catenary with a 2 screw tunnel type connector.
- Catenary wire systems must installed be true to the building line in such a manner that they are not interfered with or in contact by the structure or any other service.

### **3.9 CABLE LADDER AND TRAY**

Bolt the tray/ladder to single sided brackets for horizontal runs and roll steel channel in vertical runs. Provide cable tray as rolled or folded steel at least 1mm thick galvanised prior to delivery or from extruded structural grade aluminium with a thickness not less than 1.5mm. Use cable ladder with cable support rungs between the two rails spaced at intervals of not more than 300mm. Each adjacent length of the cable tray is to be bolted together.

Use tray/ladder 150 mm, 300mm, 450mm or 600mm wide. Provide bends, connectors, trays, ladders, brackets, and other support necessary to make a complete cable or conduit support system of the same manufacture, sized to adequately support the installed cabling.

Provide cable ladder with a cable contact area of less than 10% for power cables required to be supported on tray/ladder. Provide perforated cable tray for all non-power cables required to be supported on cable ladder or tray. Use tray that has slots that on both the normal and reverse sides there are no burrs or sharp edges. All trays and ladders must be galvanised after manufacture, prior to delivery to site.

Do not run cables with an outside diameter smaller than 13mm on cable ladder unless supported at intervals not exceeding 100mm. Slots or ladder rails will be considered suitable for fixing cable ties, strapping or saddles. Ensure all bends have a minimum inside radius of not less than twelve times the outside diameter of the largest diameter cable carried. Provide sufficient space on the tray or ladder for not less than 50% more cables or conduits than specified.

Position the tray/ladder to give adequate access for inspecting, replacing, or adding cable. Fix cable to the tray/ladder by proprietary nylon ties, straps or saddles, at 1000 mm centres for vertical runs and 2000mm centres for horizontal runs. Provide a slightly curved support surface under cables leaving the tray/ladder to protect the cable sheath from impingement by the tray/ladder edge.

Where the tray/ladder is exposed, provide a cover over the tray/ladder. Provide the cover as removable galvanised sheet steel screw fixed to the tray in lengths that allow it to be safely removed by a single person. Ensure the cover is installed in a neat manner without undue gaps and is free from burrs.

### **3.10 CEILING SUPPORTS**

Provide termite resistant plywood support to all components mounted within lay-in ceiling tiles such that the weight of the component and any associated control gear is supported on the ceiling grid and not on the tile. Provide all necessary T Bars and cut tiles required to accommodate the installation of all components mounted within suspended tile ceilings. Provide all necessary additional structural supports and T Bar rails to mount the fittings and support the plywood support. Provide all cutouts in set plaster ceilings and modify the structural support of the ceiling where necessary to accommodate the cut-out.

### **3.11 MOUNTING REQUIREMENTS**

As part of the electrical-sub contract works allow for all necessary mounting brackets, fixings, trims, cutouts, blockouts and any other incidental component that will be required to complete the electrical installation. Provide a shop drawing of all such components including how they are mounted for approval.

Fittings and components that have any moving parts or weigh more than 2.5 kgs that are fixed to the lined ceiling or walls must be provided with independent support system connected to the structure.

## 4.0 POWER DISTRIBUTION

### 4.1 SCOPE

The CLI building is to be provided with a main distribution board DB-CLI which is to contain MCCBs to supply submains to the mechanical services switchboard (MSSB) and the three new distribution boards DB-A, DB-B, and DB-D. The data room is to be provided with a dedicated distribution board DB-C.

All of the existing electrical services that become redundant due to the works are to be removed.

The power distribution component of this contract includes, but is not limited to the following extent of work:

- Power distribution.
- Earthing.
- Submains.
- Distribution boards.
- Cable access.
- Connection to equipment.
- Testing and commissioning.
- Removal of all redundant equipment, cabling and switchgear.

Undertake all power distribution cabling works including any temporary works that may be necessary to ensure the power supply is maintained to the school during operating hours. All change overs / cutovers and interruptions to the power supply are to be outside of the school's normal operating hours.

Provide the school with two weeks' notice of any interruptions. Should an interruption to the supply be required during the schools hours of operation, an alternative power supply must be provided and be connected / disconnected outside of the school's normal hours of operation.

Allow to reconnect all existing circuits that remain such that any outlets, equipment, fittings and plant that remains which was disconnected by the works is reconnected and is operation to the same level of control that was present prior to the works.

Provide written advice to all associated contractors and sub-contractors of the following information where switchboards and control panels are supplied outside of the electrical services and are provided with power by the electrical services: Provide a copy of such advice for approval and provide a copy of each piece of advice within the Operations and Maintenance Manual.

- Upstream protective device size and configurations.
- The fault level at the final point of termination.
- The cable size, type and configuration.
- Control and interface configuration and requirements.

Provide shop drawings of all distribution boards and the cable termination enclosure.

All suppliers and sub-contractors to the Electrical Sub Contractor must ensure they are familiar with and comply with the requirements of sections 1.0, 2.0 and 3.0 of this specification

## 4.2 INSTALLATION

### 4.2.1 SWITCHBOARDS

Ensure all switchboard enclosures are appropriate for the location they are intended to be installed in and have appropriate space and capacity to contain all equipment and cabling in the final configuration.

The switchgear sizes indicated on the drawings are provided as a minimum only. The current capacity and fault capacity of the switchgear must be established by the Electrical Sub Contractor and the switchgear sized accordingly by the Electrical Sub Contractor. Size all switchgear to accommodate the respective loads, starting currents and maintain a spare capacity of 10%. All loads and fault levels must be confirmed on site by the Electrical Sub Contractor with the actual equipment being supplied.

All switchgear is to be provided as NHP Terasaki.

All switchgear throughout the entire site is to be of the same manufacturer. All miniature circuit breakers are to be compact DIN style DIN rail mounted circuit breakers.

#### **4.2.2 OUTLETS AND ACCESSORIES**

The outlet and accessories sizes indicated on the drawings are provided as a minimum only. The current capacity and fault capacity of the outlet and accessories must be established by the Electrical Sub Contractor and the outlet and accessories be sized accordingly by the Electrical Sub Contractor. Size all outlets and accessories to accommodate the respective loads, starting currents and maintain a spare capacity of 10%. All loads and fault levels must be confirmed on site by the Electrical Sub Contractor with the actual equipment being supplied.

Ensure all electrical connections to equipment other than light fittings and control panels or switchboards with integral isolators are via a switched outlet or a switchable isolator. Provide all isolators as 20 Amp, lockable, IP56 isolators. Connect all isolators to the respective equipment via smooth flexible conduit unless noted otherwise.

Do not connect any motors larger than 5Kw to an isolator without motor protection relay and a control contactor.

#### **4.2.3 FAULT PROTECTION**

Unless specifically shown otherwise, provide overload, short circuit and earth fault protection utilizing automatically operated circuit breakers.

Provide 30mA earth fault protection of all cabling and outlets within residential areas, all general purpose outlets and circuits that the public could have access to during normal operation.

Ensure all circuits are suitably protected against earth faults and the protective device operates within the required time. Include details of how such protection is achieved with the testing and commissioning data for the worst case point on every circuit and submain. Such details must be in the form of one of the following:

- Circuit protected by a 30 mA RCD.
- Perspective fault current at the point, circuit impedance and protective device tripping characteristics

#### **4.2.4 CABLING**

Unless otherwise specified provide all power cables with copper conductors, a minimum size of 2.5mm<sup>2</sup> with insulation coloured as follows:

- Actives of single phase circuits: Red
- Actives of multiphase circuits:
  - A phase: Red
  - B phase: White
  - C phase: Blue
- All neutrals: Black

#### **4.3 COMMISSIONING**

As part of the commissioning of the power distribution undertake the following tests as relevant on all components of the power distribution installation:

- Has been fully commissioned in accordance with this specification.
- Phase rotation.
- Power availability.
- Resistance to earth.
- Voltage.
- Overload protection.
- Fault protection.
- Earth leakage residual current protection.
- All mechanical fixings.

Schedule the results for each item and component and include a copy of all test results in the Operations and Maintenance Manual.

Balance the load as evenly as practicable at Practical Completion. Re-check and, where necessary, re-balance the load at completion of the Defects Liability Period. Submit the balance results for approval and include a copy of the results in the Operations and Maintenance Manual.

As part of the commissioning of the power distribution, undertake any necessary adjustments to components of the power distribution installation which, have integral adjustment capacity as directed. Record all adjustments undertaken and include a copy of all adjustments in the Operations and Maintenance Manual.

Ensure the following components of the power distribution system installation are complete and have been checked and tested prior to the adjusting of the power distribution system installation to commence:

- Labelling.
- Correct operation of the power distribution system.
- All components have been installed and are operating.

Should these items not be complete prior to the adjusting of the power distribution installation the additional expenses in re-attending the installation to undertake the adjusting of the power distribution installation as incurred by the engineer will be charged to the Electrical Sub Contractor.

Provide all equipment such as ladders, scaffolding and tools necessary for adjusting the power distribution installation. Should the Electrical Sub Contractor not have available the necessary equipment to complete the adjusting and aiming of the power distribution installation, the additional expenses in re-attending the installation to undertake the adjusting and aiming of the power distribution installation as incurred by the engineer will be charged to the Electrical Sub Contractor.

The adjusting and aiming of the power distribution installation will include the following:

- Adjusting mountings and brackets.
- Adjusting switch gear settings.
- Testing all operations of the power distribution installation.
- PE Cells.
- Time clocks.

Allow attending site twice during the defects and liability period and undertaking the above adjustments to and reprogram as directed by the engineer.

At practical completion provide a Queensland Government, Department of Local Government and Planning Form 16 certifying the power installation and include a copy in the Operations and Maintenance Manual.

#### 4.4 OUTLETS

Provide all power outlets and connections as follows:

- Provide isolators for motors with a suitable motor rating; where motors are supplied by other trades, confirm motor ratings prior to sizing isolators.
- Unless otherwise detailed, all appliances will be supplied and installed by other trades, and connected by the Electrical Sub Contractor either by means of an isolator or by means of a power outlet.

- It will be the responsibility of the Electrical Sub Contractor to check with suppliers that cable and circuit breaker/fuse sizes are suitable for the equipment being installed prior to the installation of cables and circuit breakers and/or fuses.
- Specific details regarding connection to various items of equipment are not given in the specification where it is considered that the installation is of a straightforward nature and full details are available from single line diagrams/circuit schedules.
- Ensure all three phase power outlets throughout the installation have identical phase rotation and polarity.
- Install a neutral conductor to every three phase power outlet.
- The location of sinks and fittings and swing of doors shall be confirmed before the installation of general purpose outlets and light switches.
- Mount outlets of the one type where grouped together under the common flush plate.
- Provide all outlets mounted on stainless steel joinery of the flush stainless steel type with black mechanisms.
- On face plates, secure the mechanism with retaining screws, or construct the faceplate and mechanism so that the mechanism cannot be displaced during normal operation.
- Orientate switch mechanisms to operate in the vertical plane.
- Provide all GPOs, 10 amps, 3 flat pin flush, impact resistant, polycarbonate switch plug combinations, all mounted under the one cover plate with the earth pin at the 6 o'clock position.
- Mount all special purpose outlets with the earth pin at the 6 o'clock position, the neutral pin in the centre, and the red, white and blue phases in a clockwise sequence when viewed from the front of the socket.
- Provide a matching plug top with a screw ring for each three phase and screw type outlet.
- All accessories are to be flush mounted installed in wall boxes.

#### 4.5 SWITCHBOARDS

##### 4.5.1 OPERATIONAL MAINTENANCE

During the maintenance period, provide the following for each switchboard and the cable termination enclosure (CTE):

- Carry out periodic inspections and maintain the switchboard installation in a condition to meet the specified performance.
- Promptly rectify all faults.
- Replace faulty materials and equipment without charge.
- Provide a thermoscan and report equal to that provided by Thermoscan Inspection Services Pty Ltd [www.thermoscan.com.au](http://www.thermoscan.com.au) at Practical Completion, at 6 months and at end of Defects Liability Period.
- Provide written reports on maintenance activities.

In addition to the above during the maintenance period, provide the following for the MSB and DB-CLI:

- Provide on line chart recording of the mains supply for a period of one week at Practical Completion, at 6 months and at end of Defects Liability Period.
- Ensure the chart recorder includes the following information:
  - Voltage of each phase to earth and each phase to phase.
  - Current of each phase.
  - Power factor.

Include the chart recorder and thermoscans information within the Operations and Maintenance Manual with simple explanation of the findings of each.

##### 4.5.2 SITE ERECTION

Install floor mounted switchboards level and plumb using neatly cut and fitted packing plates under the channel base. Align shipping sections and bolt together. Fix the base to the floor by means of minimum 12mm stainless steel fixing screws, front and rear, at either end and at intervals of 2 meters along the length of the board.

Complete bus bar connections after alignment and bolting procedures are completed. Neatly pack the space under the base after levelling with sand-cement grout. Complete the inter-panel wiring.

Provide all floor mounted switchboards with a hot rolled steel 75mm channel plinth finished in black bitumastic paint. Provide concrete plinths where required as 20Mpa strength grade with an 80mm slump with a single layer of mesh.

Fix wall-mounted switchboards to masonry wall only. Load centres may be fixed to non-masonry walls.

#### 4.5.3 EXTERNAL DESIGN

Provide enclosures comprising panels, doors and the like, giving the specified enclosure, segregation and degree of protection. Provide separate compartments with metal segregation for all extra low voltage equipment.

Provide all switchboards other than those located in the following areas with doors:

- Switchrooms.
- Plantrooms.

Switchboards located in cupboards and risers are required to be provided with doors.

Provide all switchboards with a red oxide chromate undercoat and a baked gloss enamel finish.

Provide all external switchboards with rust proofing and as weatherproof.

Provide separate doors to all supply authority meter panels and cubicles.

Fabricate supporting frames from rolled, cold formed or extruded metal sections, with joints fully welded and ground smooth. Provide concealed fixing or brackets located to allow the assembly to be mounted and fixed in the specified location without removal of equipment.

Where stainless steel is nominated, use 316 marine grade stainless steel.

Machine fold sheet metal angles, corners and edges with a minimum return of 25 mm around the edges of front and rear panels, and 13 mm minimum return edge around doors. Provide stiffening to panels and doors where necessary to prevent distortion or drumming. All panels are to be continuously welded and ground smooth.

Provide equipment mounting panels, fixed to threaded metal inserts, located inside the enclosure at the rear of the mounting panels.

Provide fixings in the supporting structure, and removable attachments, for lifting switchboard assemblies whose shipping dimensions exceed 1.8 m high x 0.6 m wide.

Provide all visible hardware or hardware immediately behind doors, as chromium plated or stainless steel. Hardware behind escutcheons, Bramite panels and the like which is not normally visible, may be cadmium plated for internal switchboards and chromium plated or stainless steel for external switchboards. Secure Bramite panels using dome headed hexagonal nuts.

All switchboard covers, panels and doors are to be a minimum of 1.6mm thick to achieve NCC compliance.

Provide all removable doors and panels with locating pins designed to prevent it from falling when the fastening screws are removed.

Provide all switchboard doors with / as:

- Dished type

- Fitted with a combined lock and catch and a separate key
- Concealed door hinges

In locations the door covers a section of board where live terminations could be exposed once the door is opened, provide the door with the following engraved laminate red/white/red label with 10mm text;

**'DANGER'  
LIVE ELECTRICAL TERMINATIONS**

**LICENSED ELECTRICIAN OR  
SUPPLY AUTHORITY REPRESENTATIVE  
ONLY TO OPEN.**

#### **4.5.4 REMOVABLE PANELS AND COVERS**

The maximum width of any removable panel is 750 mm. Hang panels and covers on fixed studs with knurled nuts or captive nuts with knurled bolts, in either case fixing is to remain part of the panel or cover when the panel or cover is removed. Provide chromium plated 'D' type handles to each removable plate. Provide a resilient strip seal, of foam neoprene or the like, around each cover or panel, housed in a suitable channel or housing, fixed with an approved industrial adhesive. In indoor locations, provide certified smoke seals to all panels and covers. For external switchboards provide a continuous positive line of weatherproof contact.

All doors are to be locked using the EMKA three-point locking system and operated by Selectric stainless steel lockable swing handles. Supply four keys on individual stamped aluminium key tags. Ensure all of the switchboards are keyed alike and are keyed on the site master key system. All meter panels located externally and in areas subject to unauthorised access are to be locked to the supply authorities' requirements using the supply authority key.

Provide each door with a substantial internal stiffener fitted with plan pockets and EMKA 1087U1 wind stops.

Provide all fixings on switchboards located externally or in potentially corrosive environments as stainless steel. Provide all fixings on switchboards located internally in non corrosive environments as chrome plated. Plastic or nylon fixings are not acceptable.

#### **4.5.5 ESCUTCHEON PLATES**

The maximum width of any escutcheon plates is 750 mm and the maximum height is 1,200mm. Hang escutcheon plates on lift-off pin hinges on one side and secure on the other with fixed studs with knurled nuts or captive nuts with knurled bolts, in either case fixing is to remain part of the escutcheon when the escutcheon is removed. Provide chromium plated 'D' type handles to each side of the escutcheon. Provide removable escutcheon plates with neat cutouts for circuit breaker handles and the like. Provide a continuous 12 mm wide support frame for the fixing of each escutcheon plate, including additional support where necessary to prevent panel distortion. Hang escutcheon plates on hinges, which allow opening through a minimum of 90 and permit the removal of the escutcheon when in the open position.

Provide cutouts in the escutcheons for all spare future circuit breakers. Provide blank fillers in all spare escutcheon cut-outs.

Ensure all circuit breaker labels and adjustment dials are visible through the escutcheon when the escutcheon is closed.

#### **4.5.6 FINISHES**

Where metal surfaces are to be painted:

- Unprotected steel: Remove rust by abrasive blast to AS 1627.4 Class 3, clean by immersing in trichloroethylene or an alkaline solution, and apply a coat of iron phosphate.

- Galvanised steel: Clean by immersing in a suitable alkaline or acidic solution, apply a chromate or zinc phosphate chemical conversion coating, rinse and degrease.
- Aluminium: Clean by immersing in a suitable alkaline or acidic solution, caustic etch and apply a chromate chemical conversion coating.

Paint the internal and external surfaces of all switchboards, control panels and meter panels located externally in a polyurethane epoxy or epoxy powder coat. Paint the external surfaces, escutcheons and doors of all switchboards, control panels and meter panels located internally with a baked enamel or epoxy powder coat. Paint the internal surface of switchboards, control panels and meter panels located internally as acrylic, baked enamel or epoxy powder coat. Ensure all paint finishes are applied in accordance with the manufacturers' recommendations.

After the switchboards have been installed, repair all chips and scratches in the paintwork to an as new condition.

#### **4.5.7 CONDUCTORS**

##### **4.5.7.1 BUS BARS**

Provide bus bar systems as high conductivity copper capable of withstanding the thermal, magnetic and physical stresses set up by the fault level detailed for a period of one second. Provide fault level calculations with the shop drawings. Phase colour the bus bars at appropriate intervals for ease of identification over their entire length at any opening, to within 10.0mm of fixings and terminations. Ensure the connections from the bus bars to the equipment are as short as possible and made using bus bars unless the latter is physically impossible. Design bus bar systems for continuous full load operation over a 24 hour period at an ambient temperature of 40°C, with short time peaks of 50°C, resulting in a maximum final bus bar temperature of 105°C. Make allowance for totally enclosed cubicles and for cubicles installed within recesses with or without doors. Provide neutral links and earth bars with sufficient capacity and terminals for connection of all conductors, one conductor per terminal, with spare capacity as detailed and with each terminal being numbered by means of stamping. Clearly mark and number terminal connections. Provide neutral bars with a current carrying capacity equal to that of the incoming phase conductors. Provide bus bar circuits within the switchboard, extending from the termination of the incoming unit to the line side of protective equipment for outgoing circuits. Provide stud connections for cables of cross section 16 mm<sup>2</sup> or larger.

Pre-drill the Bus Bars for future extension and extend bus bar droppers to spare locations. Drill each dropper to suit connection of future equipment of the same type as that specified.

Radius all bus bar edges and corners to prevent damage to insulation. Provide support sufficient to withstand without damage, the maximum prospective fault currents. Make bus bar joints with high tensile bolts and nuts, locked in position with lock nuts or locking tabs. Tighten bolts to the manufacturer's recommendation with a tension wrench. Do not use tapped holes and studs or the like for jointing current-carrying sections.

Colour the insulation or bus bar as follows:

- Active Bus Bars: Red, white or blue.
- Neutral Bus Bars: Black.
- Earth bus bar: Green and yellow.

##### **4.5.7.2 NEUTRAL AND EARTH LINKS**

Locate neutral and earth links within 0.6 m of each cable entry. Provide terminals for incoming and outgoing neutral and earth conductors, including the MEN link. Provide additional terminals for future circuits.

##### **4.5.7.3 WIRING**

Provide all wiring within switchboards as follows:

- Install all internal cabling neatly horizontally and vertically. Cable trough (PVC with slotted sides) may be used, or alternatively cables may be laced/loomed using proprietary cable ties, with adequate insulated supports being provided. Ensure laces/looms are not unnecessarily tight.
- Unless otherwise specified, provide PVC wiring ducts to support and manage all switchboard control wiring and outgoing sub circuits. Ensure the total cross section of the wiring within any one duct, including allowance for outgoing connections, does not exceed 40% of the duct cross sectional area.
- Support cabling to ensure that strain does not occur at terminations.
- Use crimp type lugs at terminations, unless equipment has been specifically designed to preclude terminations being made in this manner. Use lugs with insulated ends.
- Fix cables 25.0mm<sup>2</sup> and over in size to internal cable trays.
- Bush openings in internal barriers for the passage of cables to prevent damage to insulation using Wattmaster or equivalent 'movable' bushing, glue fixed in position.
- Install cables associated with metering equipment and current transformers in conduit.
- Identify wiring at each end of each conductor with a captive type marking ferrule. Horizontally mounted markings are read from left to right and vertically mounted markings are read from top to bottom.
- Provide the cable lugs associated with consumer's mains and/or submains with permanent identification to denote phase colours.
- Provide sufficient space on mounting rails for future outgoing circuits possible in any cabling compartment.
- Provide terminal blocks for interconnecting wiring on each side of shipping breaks.
- Identify, by markers, each control core using an approved numbering system.

Provide cables sized to suit a current carrying capacity of not less than the maximum continuous rating of the equipment mounted within the switchboard, or sized to withstand the 'let-through' energy of the circuit protective device, whichever is the greater. If the conductors are to be bunched or installed within wiring ducts, apply appropriate de-rating factors when determining conductor size. The minimum size power conductor is multistrand 2.5 mm<sup>2</sup>.

Provide control and indication conductors of not less than 1.0 mm<sup>2</sup> with 32/0.2 stranding and otherwise sized to suit the current carrying capacity of the particular circuit.

Colour code the wiring as follows:

- A Phase: Red.
- B Phase: White.
- C Phase: Blue.
- Neutral: Black.
- Earthing: Green/Yellow.

If no provision is made in wiring ducts for external connecting cables, install a galvanised perforated cable tray between terminal blocks and cable entries, of a size, and with available access space, sufficient to permit ready installation of the external wiring.

Segregate electric circuits subject to possible interference, and the like.

For connections up to 15 kW load, provide rail-mounted, spring-loaded, tunnel type terminal blocks. For connections to circuits above 15 kW load, provide stud type terminals of a size to continuously carry the load and not less than 5mm diameter. Fit washers and lock washers to each stud, and barriers between adjacent studs. For tunnel type terminals, connect one conductor only into each end of the tunnel and interconnect terminal groups where necessary, by standard cross connectors. Terminate wiring into terminal blocks using compression type lugs compatible with the terminals and crimped by the use of the correct tool. Lugs for connection to tunnel type blocks will be of pre-insulated lipped blade type. Terminate internal wiring to the one side of the terminal block, leaving the other side for outgoing circuits.

Segregate terminal groups and install together terminals for each outgoing circuit, in the same order throughout, as follows:

- Terminals for power wiring: 3 phases or phase and neutral;

- Control terminals: In numerical or alphabetical order of wire identification, with the lowest number or letter next to the power terminals.

Where more than two 100Amp submains/circuits are reticulated through the switchboard for more than 600mm, provide a metal segregated cable zone to accommodate such cabling.

#### **4.5.8 SWITCHGEAR AND CONTROL GEAR**

##### **4.5.8.1 MOULDED CASE AND MINIATURE CIRCUIT BREAKERS**

Provide all circuit breakers of the same manufacture.

Mount the circuit breakers so that the 'ON-OFF' and current rating indications are clearly visible with the cover or escutcheon in position, and so that arc discharges from the circuit breakers are directed away from live metal and insulation. Align operating toggles in the same plane.

For miniature over current circuit breakers provide clip tray assemblies, capable of accepting the installation of single, double, or triple circuit breakers, and related Bus Bars. Provide moulded clip-on pole fillers for all unused portions of the chassis.

Maintain sufficient space around the circuit breakers to allow all incoming and outgoing cables, including cables to spare poles, to be installed and terminated without overcrowding. For clip tray chassis mountings, the clearance between the circuit breaker terminals and compartment walls will not be less than 90 mm up to 36 poles and 115 mm above 36 poles.

Provide auxiliary contacts shunt trips, motor operators and other required accessories. All motor operated circuit breakers for load shedding switchboards to be fitted with under volts trips.

Provide all circuit breakers that do not have adjustable trip units that supply motors and / or inductive loads as D curve circuit breakers. All other fixed trip unit circuit breakers are to be provided as C curve circuit breakers. Advise the engineer in writing of the circuits that will be supplied with D Curve circuit breakers so the clearing times of earth faults can be checked.

##### **4.5.8.2 RESIDUAL CURRENT DEVICES**

Unless specifically noted otherwise provide residual current devices (RCD) with a maximum tripping current of 30milli-Amps and a maximum tripping time of 20 milli-seconds. Use RCDs specifically designed to be added to or integral to the circuit breaker and be suitable for mounting in the same manner as specified for moulded case and miniature circuit breakers. Ensure all RCDs have a test facility which can be operated with the escutcheon closed. Use RCD/circuit breaker combinations that do not use more than a single pole per single phase circuit and no more than four poles per three pole circuit.

All RCDs that protect supplies to variable speed drives are to have a minimum tripping current of 300milli-Amps.

Ensure that short circuit, cascading, a discrimination performance of the circuit breaker will not be affected by the earth leakage device.

##### **4.5.8.3 SWITCH-ISOLATOR AND FUSE-SWITCH UNITS**

Ensure switch-isolator and fuse-switch units have a rated thermal current applicable to the unit when installed in the nominated enclosure and they have an uninterrupted rated duty. Ensure the rated short-circuit making capacity is not less than the switchboard fault level. For circuits comprising essentially motor or other highly inductive loads, use units with an utilisation capacity not less than AC-23. For other circuits, ensure the utilisation capacity is not less than AC-22.

Ensure that independent manual operation with a positive manually operated on-off indicator facility to lock the unit in the OFF position is provided.

Use totally enclosed units incorporating arc control devices and shrouded stationary contacts.

#### **4.5.8.4 CONTACTORS**

Provide contactors with a minimum rating of 20A at AC-22 of the block type, air break rated for continuous duty. Ensure the contactor is rated above the full load current of the load controlled when mounted in the nominated enclosure. Provide contactors with an utilisation category above AC-3 or DC-3 as applicable. Provide auxiliary contacts for the specified control circuits. Where space is available, fit not less than two sets of spare contacts. Where the number of specified auxiliary contacts exceeds the number which can be accommodated, provide a separate slave relay. Ensure reversing contactors are mechanically and electrically interlocked.

Mount the contactor with sufficient clearance to other equipment and to its enclosure to allow full access for maintenance, removal and replacement of coils and contacts, without the need to disconnect wiring or remove other equipment. All contactors mounted in switchboards are to be extended through the escutcheon.

Do not connect contactors in series or parallel to achieve the specified ratings.

#### **4.5.8.5 CONTROL RELAYS**

Provide control relays with a minimum rating of 5A suitable for continuous operation under the specified conditions with operating characteristics suitable for the application. Use plug-in types latched to the receptacle base by a captive clip, which can be applied and released without the use of tools.

Ensure the control relays employ electrically separate, double break, silver alloy, and non-welding contacts.

For standard control relays, provide assemblies with a minimum of four sets of contacts and capable of being expanded to a total of eight contacts in the same assembly. Where space is available, provide not less than one normally open and one normally closed contact.

Provide contact blocks, which are readily convertible in the field to either normally open or normally closed contacts.

Use time delay relays adjustable over the full timing range and have a timing repeatability within 12.5% of the nominal setting.

Use phase failure relays of the solid-state type, which drop out at 80% of the normal voltage after an appropriate time delay. Ensure the sensing circuit rejects disturbances having frequencies other than 50 Hz, and induced voltage spikes.

#### **4.5.8.6 SURGE PROTECTION**

Provide the distribution boards where noted in the distribution board schedule with surge protection in accordance with AS1768 with the following features and requirements:

- The Maximum Discharge Current,  $I_{max}$ , as defined in IEC 61643-1 must be 50kA, 8/20 $\mu$ s per phase.
- The Nominal Discharge Current,  $I_n$ , as defined in IEC 61643-1 must be 25kA, 8/20 $\mu$ s per phase.
- The Voltage Protection Level Up as defined in IEC 61643-1 must be less than 750V at 3kA 8/20 $\mu$ s and 6kV 1.2/50 $\mu$ s.
- The Voltage Protection Level Up as defined in IEC 61643-1 must be less than 1200V at 20kA 8/20 $\mu$ s and 6kV 1.2/50 $\mu$ s.
- The Maximum Continuous Operating Voltage,  $U_c$  must be 415 Volts three phase 240 Volts single phase.
- The products must be UL recognised under UL1449-2 standard.
- (The product must be equivalent to CRITEC TDS 150 or the CRITEC TDS350)

- The surge diverter must have light indication and voltage free contacts.
- Provide a manufacturer's warranty of a minimum of 5 years for the surge diverter.
- Tested in accordance with the requirements of UL1449 Edition 2 and EC 61643-12 Class I and II

All surge protection devices mounted in switchboards are to be extended through the escutcheon.

#### 4.5.9 LABELS

Provide a two-colour laminated plastic schematic for each switchboard. Provide additional control schematics as required. Securely fix the schematics to the front of the switchboard or behind the switchboard door if it switchboard is provided with a door.

Include the following information on the schematics:

- All installed cable types, lengths and cable sizes.
- All protective device frame sizes and settings.

Screw-fix each label adjacent to its relevant item of equipment, but not on the equipment.

Provide warning notices as white letters on red background and other labels as black lettering on a white background.

Provide the lettering height not less than:

- Switchboard designation: 25mm.
- Main switches: 20mm.
- Feeder control switches: 10mm.
- Identifying labels: (on outside of cubicle rear covers, etc.): 6mm.
- Equipment labels within cubicles: 4mm.
- Warning notices: 4mm.

Provide each switchboard with a neatly typed A4 circuit index schedule, that includes the circuit breaker number, rating and the circuit function (ie. 4 G.P.O's Sales Area, etc.). Mount the circuit index schedule in an index holder located on the inside of the switchboard door that is provided with a clear perspex cover.

Include a copy of the circuit index schedule and the SLD in the manual.

#### 4.5.10 SWITCHBOARD OPERATING PARAMETERS

Provide the distribution boards to the following requirements:

- Line: 400 v.
- Phase: 230 v.
- Frequency: 50 HZ.
- Number of phases: three.
- Number of wires: four.
- Neutral connection: star point.
- Earthing system: MEN.
- Ambient air temperature range: -5 to +45deg c.
- Relative humidity: 90%.
- Switchboard designations: DB.
- Mounting: wall mounted.
- Degree of protection: IP55.
- Numerical designation: category 1.
- Form 1.
- Equipment connection: front connected.
- Gland plates: 3mm thick brass or aluminium or 6mm thick grey UV stabilised PVC in internal locations. Provide all gland plates with a neoprene gasket.

#### 4.5.11 MATERIALS AND FINISH

Enclosure: Zincanneal, powder coat Light Grey, (AS 2700 - colour N35).

Escutcheons: Zincanneal, powder coat white.

Doors: Zincanneal, powder coat Light Grey, (AS 2700 - colour N35).

Plinths: Mild Steel, Painted Black.

#### 4.6 EARTHING SYSTEM

Provide a comprehensive earthing system throughout the project addressing all aspects of the structure, all services, all systems and components in addition to those forming part of the power distribution. Provide transient earth clamps between the power earth system and the connection to all other earthing systems.

## 5.0 LIGHTING

### 5.1 SCOPE

The lighting component of this contract includes internal lighting to all areas of the building, external lighting, general lighting control, emergency and evacuation lighting and the lighting sub circuit wiring. All of the light fittings and accessories are to be provided as part of this contract.

The lighting component of this contract includes, but is not limited to the following extent of work:

- Lighting.
- Light fittings and accessories.
- Lamps.
- Earthing of the lighting installation.
- Lighting control.
- Emergency and exit lighting.
- Lighting subcircuits.

Irrespective of the mounting heights given in the electrical documents, the mounting and suspension heights of all wall mounted and suspended light fittings must be confirmed with the architect. Provide written evidence such confirmation has been received. If any wall mounted or suspended lights are installed without the height confirmed by the architect, adjusting the height will not be acceptable grounds for a variation.

Provide Shop Drawings of all custom luminaries.

All suppliers and sub-contractors to the Electrical Sub Contractor must ensure they are familiar with and comply with the requirements of sections 1.0, 2.0 and 3.0 of this specification.

### 5.2 COMMISSIONING

#### 5.2.1 GENERAL

As part of the commissioning of the lighting, undertake the following tests as relevant on all components of the lighting installation:

Schedule the results for each item and component and include a copy of all test results in the Operations and Maintenance Manual.

As part of the commissioning of the lighting, undertake any necessary adjustments to components of the lighting installation which have integral adjustment capacity as directed by the project manager. Record all adjustments and include a copy of the adjustment records in the Operations and Maintenance Manual.

Chemically clean all reflectors, lenses, diffusers and lamps prior to the aiming and adjusting of the lighting installation.

Undertake each of the following mechanical checks for each component of the lighting installation as part of the commissioning process:

- All luminaires have been positioned to coordinate with other installers (such as air conditioning contractors, installers of girders and plasterers).
- All luminaries are in the correct position and in the correct orientation.
- All luminaries are clean and undamaged with the correct lamps fitted (i.e. manufacturer, rating, phosphor and electrical type).
- All channel dials and function switches (as appropriate) have been set to the specified settings.
- All sensor levels have been set to the specified levels.
- All components are uniquely and clearly labelled.
- The alignment of all luminaries has been adjusted to avoid glare and unwanted over-spill.
- All cover plates have been fitted and electrical segregation is complete.

- All raise and lower gear has been checked.
- All safety chains, safety cords and filter holders etc. on luminaries have been securely mounted; associated control gear have been fixed securely on lighting trusses, booms, barrels and bars, or placed in a secure position.

Undertake each of the following electrical checks for each component of the lighting installation as part of the commissioning process:

- All luminaries, switched and sensors have been wired according to the wiring diagram provided.
- All lights and track circuits have been wired to the specified control switch or dimmer.
- All mains wiring has been tested and certified as complying with the recommendations of AS3000.
- The voltage and frequency is stable and within the relevant authority limits.
- Control operation.
- The Resistance to earth of each fitting switch panel and exposed metallic component.
- The supply voltage and frequency at each fitting.
- Overload protection has been installed and operates correctly.
- Fault protection has been installed and operates correctly.

At practical completion replace all lamps in emergency luminaries that have operated for more than 96 hours during the construction phase.

Smartscape Automation are to program the Dynalite lighting control system at practical completion to the satisfaction of the school. Smartscape Automation are to attend site for four hours four times during the defects and liability period to adjust the Dynalite lighting control system to the satisfaction of the school.

#### 5.2.2 LIGHTING CONTROLS

Confirm all light occupancy sensors are located and orientated appropriately in relation to the occupants. Confirm the occupancy sensor sensitivity is appropriate by adjusting the detector sensitivity to ensure the occupant movement is detected throughout the occupied zone. Configure the sensitivity to ensure seated occupants are detected, whilst movement outside the controlled zone does not activate the lights. Confirm the time delay setting is representative of the occupant work/movement patterns and is assessed when the building is occupied.

Set all start and stop times along with override controls (e.g. occupant or security staff override) as advised by the engineer on site.

Ensure that scenes operate as advised by the engineer on site. Ensure that scenes are labelled adequately to allow an untrained user to select the correct option.

#### 5.2.3 INTERIOR LIGHTING

Confirm the aiming and focusing of adjustable luminaries is adequately addressed. If all other lighting needs to be switched off during this process, ensure the site to be free from other workers requiring light.

Provide a safety method statement that allows those aiming and focusing the luminaries to use appropriate access gear belonging to, or hired by, the installer. If it is intended that the luminaries be adjusted by the end user after practical completion of the project, this must be indicated in the commissioning method statement.

#### 5.2.4 EMERGENCY LIGHTING

Undertake the commissioning of emergency lighting in accordance with AS2293.

### 5.3 LUMINARIES

#### 5.3.1 GENERAL

It is the electrical sub contractor's responsibility to ensure the luminaire is appropriate for the intended location considering the following:

- Mounting requirements.
- Lay in diffusers are sized such that they do not fall out of the light fitting or ceiling when the installation is subjected to normal air pressure changes and or winds.
- Fitting size.
- IP protection.
- Exposure to corrosive environment.
- Hazardous environment.
- UV exposure.
- Safety.
- Heat.
- Vandalism.

Irrespective of the fitting type specified, provide all light fittings in compliance with the restricted zone requirements of AS3000. Provide all light fittings over baths as Class II double insulated.

Provide each fitting with a screw tunnel type fused terminal block capable of housing 4x2.5mm<sup>2</sup> conductors in each terminal.

Provide all discharge fittings with low loss control gear. Replace any ballasts causing audible humming or crackling. Ensure all discharge lamps are compatible with the ballasts and other starting and control gear. Provide written evidence from the manufacturer of such and include it within the manuals.

Provide recessed luminaires with an external 1500 mm length of 1mm<sup>2</sup> 3-core PVC/PVC flexible cord to AS 3191, connected to a 10 A 3-pin plug top to AS 3112 (Flex and Plug).

Provide all discharge light fittings with power factor correction to achieve a power factor of not less than 0.9 lagging after two hours of continuous operation.

Where required by the supply authority, provide blocking inductors to the authority's approval.

Provide luminaires with all internal wiring colour coded to AS3137.

Provide each extra-low voltage luminaire with a dedicated step down copper wound, iron core sealed type c/w internal automatic thermal switch and a flex and plug. Provide the engineer with written confirmation that the proposed step-down transformers are compatible to be dimmed by the dimmers specified. Mount the transformers such that they are hanging in free air in a concealed location such that they can be accessed and removed.

### 5.3.2 MOUNTING

Co-ordinate with other trades to ensure that mounting locations are clear of other services. Ensure the locations of all luminaires are symmetrical with the adjacent fixtures and that unintentional glare is avoided.

Provide luminaires suitable for mounting in the required position or ceiling type. Ensure that all luminaires and luminary control gear are not covered by insulation and have appropriate ventilation. Mount all light fittings to fixed rigid supports.

Provide termite resistant plywood support to all luminaires mounted within lay-in ceiling tiles such that the weight of the light fitting and control gear is supported on the ceiling grid and not on the tile. Provide all necessary T Bars and cut tiles required to accommodate the installation of luminaires mounted within suspended tile ceilings. Provide all necessary additional structural supports and T Bar rails to mount the fittings and support the plywood support. Provide all cutouts in set plaster ceilings and modify the structural support of the ceiling where necessary to accommodate the cut-out.

Provide all light fittings mounted within T Bar ceilings with a flexible lead and plug and an unswitched active. Provide such fittings with an approved plug base securely fixed to the structure above the fitting.

For fixing of surface-mounted luminaries to ceilings or walls, provide not less than, four fixings in square and rectangular luminaries and three fixings in circular luminaries, placed symmetrically.

In locations light fittings are recessed into thermal or acoustic insulation provide all necessary supports and modifications to the insulation to allow the fitting to be installed and the integrity of the insulation to be maintained.

Provide all fittings in food preparation areas as follows:

- Sealed with no top surfaces less than 45 deg exposed to the room air.
- All lamps are fully enclosed.
- All trims are sealed against the ceiling.
- All diffusers are to be held in place in a sealed frame.
- The diffuser frame is to be fixed in place with a positive contact sealing gasket against the fitting trim and secured in place by a minimum of four stainless steel screws.
- Diffusers sealed into the fitting trim by a sealant are not acceptable.

Provide suspensions and luminaries suspension connectors capable of supporting, without damage, five times the mass of the luminaries, or 25kg, whichever is the greater. Ensure all suspended light fittings hang horizontal and adjacent fittings are hung to the same level. Provide all light fittings suspended from a raked ceiling with an adjustable ceiling mounting such that the fitting equipment hangs vertically. Where light fittings are not supplied with integral suspensions provide the suspensions as follows:

- Structurally support the light fittings on threaded booker rod.
- Cover the booker rod with conduit painted to match the light fitting colour.
- Run all wiring to the light fitting through the conduit.
- Fix the conduit into a ceiling rose on the ceiling to provide a neat finish to the conduit.

In all cases suspended light fittings are subject to movement due to wind or air conditioning breeze provide the suspensions as fixed rod suspensions.

## **5.5 EMERGENCY LIGHTING**

Provide a single point emergency lighting system that complies with the latest issue of all parts.

Install emergency light fittings nominated as maintained as follows:

- The lamp is to be permanently on supplied via an unswitched active mains supply when the mains supply is available. When the mains supply is not available, the lamp is to remain on supplied by the emergency pack. Single lamp maintained emergency lights are not switched with the local general area lighting. (The lamp is always on.)

Install emergency light fittings nominated as non-maintained as follows:

- If the fitting is not shown as being switched, the lamp is to remain off when the mains supply is available. When the mains supply is not available the lamp is to be switched on supplied by the emergency pack. Unswitched single lamp non-maintained emergency lights are not switched with the local general area lighting. (The lamp is on only when the mains supply is not available.)
- If the fitting is shown as being switched, the lamp is to be supplied and controlled with the local general area lighting when the mains supply is available. When the mains supply is not available the lamp is to be switched on, supplied by the emergency pack. (The lamp is on when turned on with the local general lighting or the main supply is not available.)

Provide the emergency lights as the self contained type, Twin rate constant current, constant voltage, and temperature compensated type with automatically selected boost and float charging rates, 70°C rated sealed plastic type lithium iron with a rated battery life of 10 years. Indelibly stamp each battery with its date of manufacture. Protect the inverter system against damage whilst in operation in the event of failure, removal or replacement of a lamp.

Label each circuit breaker which controls the unswitched active to exit lights with a label fixed adjacent; engraved plastic laminate, green background with white characters:-

**WARNING  
INTERRUPTING SUPPLY WILL DISCHARGE  
EMERGENCY LIGHTING BATTERIES**

Provide written evidence of the initial commissioning and testing and testing for the duration of the maintenance period in accordance with AS 2293.2.

This evidence is to be in the form of a log book similar to the General Lighting Service Pty Ltd "Emergency Lighting Maintenance Log Book and Manual" which is to be provided by the electrical sub contractor and have all entries fully completed and be presented for inspection at practical completion. The log book is to be retained by the electrical sub contractor for the duration of the maintenance period, and the six monthly test and maintenance results entered. The log book is to be presented for approval at final completion (expiry of the maintenance period) and will be forwarded to the operator for their use.

Provide maintenance of the emergency and exit lighting installation including records in accordance with the latest issue of all parts AS2293.

Provide the emergency lighting system with a supply sensing and testing facility in accordance with AS 2293.1 where noted in the distribution board schedule.

## **5.6 ADJUSTING AND AIMING OF LIGHTING INSTALLATION**

Ensure the following components of the lighting Installation are complete and have been checked and tested prior to the adjusting and aiming of the lighting installation to commence:

- Circuiting.
- Labelling.
- Connection of correct lights to correct channels.
- Correct operation of lighting control system.
- All lights have been installed and are operating.

Should these items not be complete prior to the adjusting and aiming of the lighting installation the additional expenses in re-attending the installation to undertake the adjusting and aiming of the lighting installation as incurred by the project manager will be charged to the Electrical Sub Contractor.

Allow for the adjustment and aiming of luminaries over a period of four (4) hours per night for two (2) nights during the hours of darkness to achieve final set-up. This work will be carried out under the direction and to the satisfaction of the project manager.

Provide all equipment such as ladders, scaffolding and tools necessary for adjusting each luminaries. Should the Electrical Sub Contractor not have available the necessary equipment to complete the adjusting and aiming of the lighting installation, the additional expenses in re-attending the installation to undertake the adjusting and aiming of the lighting installation as incurred by the engineer will be charged to the Electrical Sub Contractor.

The adjusting and aiming of the lighting installation will include the following:

- Setting all PE cells and time clocks.
- Focusing of lights.
- Adjusting mountings and brackets.
- Aiming of fittings.
- Setting all sensors.
- Testing all operations of the lighting control system.
- Testing the emergency and exit lighting system.

Allow attending site twice during the defects and liability period and undertaking the above adjustments to and reprogram as directed by the school.

Document the final results of all adjusting and aiming of the lighting installation and include them in the Operations and Maintenance Manual.

## 6.0 COMMUNICATIONS CABLING

### 6.1 SCOPE

EDC Systems Pty Ltd, 3/40 Proprietary St, Tingalpa Queensland 4173 - Robert Blake 0422796412 phone 07 38907068 robert.blake@edcsystems.com.au are to be engaged as a nominated sub-contractor to the electrical sub-contract to undertake the communications cabling.

The communications cabling component of this contract includes an integrated telephone and data EIA/TIA 568-A Category 6 Molex certified RJ45 cabling solution.

The two existing core racks CR-32 and CR-56 are to be connected to CR-B by new underground loose tube gel filled 12 core OS2 optical fibre cables fully terminated with SC connectors.

All FOBOTs, outlets and patch panels that are required to terminate the cabling provided as part of the communications cabling are to be provided as part of these works.

Within all cases in this contract, Category 6 and Cat 6 is to be read as Category 6 Class E.

The terms Category and Cat are used interchangeably throughout this contract to refer to cabling types and standards.

Provide all copper products within the communications cabling scope as being capable of supporting the provision of power to the Data Terminal Equipment via the electrically conductive Media Dependant Interfaces as specified in the latest IEEE 802.3af "Power over Ethernet" standard.

The communications cabling component of this contract includes but is not limited to the following extent of work:

- Communications cabling.
- Cable access ways.
- Earthing.
- Facility cabling.
- 19-inch equipment rack/s.
- Patch panels.
- Fibre cabling.
- FOBOTs.
- Access and conduits.
- Independent certification.
- Communications outlets.
- Link outlets.
- MATV system.

Provide the communications system as a propriety Molex structured cabling system with a component manufacture's 25 year warranty over the communications installation. Include a copy of the propriety structured cabling system manufacturer's warranty in the Operations and Maintenance Manual.

Provide comprehensive details for approval of the structured cabling solution including the manufacturer's performance and installation requirements as well as details of the FOBOTs, patch panels, frames, patch leads, cables, faceplates, outlets and fly leads.

All suppliers and sub-contractors to the Electrical Sub Contractor must ensure they are familiar with and comply with the requirements of sections 1.0, 2.0 and 3.0 of this specification

Ensure that the work is performed by the holder of a current ACMA license and the staff member has been trained and is certified by the propriety structured cabling system manufacturer. Provide a copy of the appropriate ACMA license and propriety structured cabling system manufacturer's certification for approval prior to commencing work onsite and include a copy in the Operations and Maintenance Manual.

Provide independent testing and certification of the performance of the communications installation and include a copy of such in the Operations and Maintenance Manual.

Provide as part of the tender response, a list of the technical support staff and installation staff, together with their working experience in the relevant field who are proposed to undertake the installation and provide maintenance support. Include the date each of the nominated staff members received formal classroom training by the structured cable system manufacturer. Nominate the location of the office proposed to control and support the installation and maintenance.

Provide the communications cabling installation in accordance with the requirements of the following standards including all subsequent amendments and addendums:

- ACMA TS008, 1996, Requirements for Authorised Cabling Products.
- ACMA TS009, 1996, Installation Requirements for Customer Cabling (Wiring Rules).
- AS 3080:2002 Telecommunications Installations - Integrated Telecommunications Cabling Systems for Commercial Buildings.
- AS/NZS 3084:2003 Telecommunications Installations - Telecommunications Pathways and Spaces for Commercial Buildings.
- AS/NZS 3085.1:1995 Telecommunications Installations - Administration of Communications Cabling Systems. Part 1: Basic Requirements.
- TSB 36 Category 6 cabling.
- TSB 40 Category 6 connectors.
- AS/NZS 3548 EMC - Information Technology.
- Vendor Installation training manual (Copper & Fibre).
- AS/NZS 4117 Surge Protective Devices for Telecommunication Applications
- AS/NZS ISO/IEC 14763-3 Implementation and Operation of Customer Premises Cabling - Part 3: Acceptance for Optical Fibre Cabling
- AS/NZS IEC 61935.1 (Replaced AS/NZS 3087 in 2006) Testing of Balanced Communications Cabling In Accordance with ISO/IEC 11801 - Part 1
- ISO/IEC 11801 Ed 2 Information Technology - Generic Cabling for Customer Premises - Class A to F
- ISO/IEC 11801 Ed 2 Amendment 1 Information Technology - Generic Cabling for Customer Premises - Class E A and F A Channels
- ANSI/TIA 568-C.2 Balanced twisted Pair telecommunications Cabling and Components

All items not covered by the above Standards are to comply with the following:

- EIA/TIA-569-C Commercial Building Standard for Telecommunications Pathways and Spaces.
- EIA/TIA-606 the Administration Standard for the Telecommunications Infrastructure of Commercial Building.
- TSB67 Transmission Performance Specification for Field Testing of Unshielded Twisted Pair Cabling Systems.
- TSB72 Centralised Optical Fibre Cabling Guidelines.

Ensure the communications cabling installation meets the minimum performance requirements of the following:

- ISO 11801 Ed 2 for Class E (Cat 6)
- IEEE 802.3 10/100/1000 Base-T Ethernet
- RS 232 Asynchronous Communications @ 19.2 Kbps.
- ISDN (ETSI).
- Digital Voice Telephony.
- Analogue Voice Telephony.
- Voice over IP.
- ISO 9314 FDDI at 100Mbps.
- Asynchronous Transfer Mode @ 622Mbps.

Use only the 568A wiring scheme for 8-position modular components throughout the site. Do not mix 568A and 568B wiring schemes.

## 6.2 INSTALLATION

### 6.2.1 CABLING

#### 6.2.1.1 GENERAL

Shielded twisted pair cables are not acceptable.

Ensure all communications cables are not installed with a pulling force that exceeds the manufacturer's recommended maximum pulling force. Use cable mounted pulling eyes / cable netting to install cables.

Do not paint communications cables.

Do not run communications cabling and power cables parallel in skirting duct for more than 10 meters.

Do not use motorised winches or vehicles to pull in communications cables.

Ensure the cable manufacturer's minimum bending radii are not exceeded at any time. Any cables that exceed the cable manufacturer's minimum bending radii or are kinked must be entirely replaced. If the cable manufacturer's minimum bending radii is not available ensure that a minimum bending radius at least 10 times the diameter for all other multi-core fibre cables under no-load and 20 times the cable diameter during installation or long-term under load are not exceeded.

The communications cables are to avoid areas of concentration of electrical power and mechanical and hydraulic services.

Ensure where cables are reticulated via catenary wire, horizontal cables are tied off loosely, to the catenary wire at intervals no greater than 600 mm. Ensure a maximum of twenty-four (24) four pair UTP cables are supported on a single catenary wire support.

Ensure tension on the cable tie is such that ties must be able to be moved laterally along the cable run and yet still maintain the cable to the support structure.

Utilise installation procedures that ensure that no undue stress is placed on any cable and there is not any evidence of sag or kinks.

Ensure cable entry into a power pole, riser column, duct or cavity is preceded by at least a one-turn service loop of minimum 300 mm in diameter prior to entry into the pole, column, duct or cavity to allow for minor moves and changes allowances.

Use waterfall type control accessories for vertical direction changes of more than 45 degrees.

Ensure all cables have a unique cable identification permanently and legibly placed at each end of the terminated cable within approximately 200 mm from where the cable is terminated utilising a Brady type wrap around each label.

Do not install more than 10 UTP cables in a 35 x 40 duct or 15 UTP cables in a 40 x 50 duct or 18 UTP cables in a 50 x 50 duct. Do not install more than 75 UTP cables on a 150 wide tray or more than 160 UTP cable on a 300 wide tray. Do not install more than 2 UTP cables in a 20 dia conduit or 2 UTP cables in a 25 dia conduit or 7 UTP cables in a 32 dia conduit or 18 UTP cables in a 50 dia conduit. All communications cable trays are to be supported by cantilever L type brackets.

Ensure all communications conduits have 50% of the cross sectional area as spare after all of the cabling has been installed.

Use cable supports that are smooth and at least 34 mm wide with rounded-off edges.

It is not acceptable for any communications cables to be buried direct.

Ensure all cabling that is installed externally is loose tube, gel filled flooded PVC insulated PE sheathed installed in conduit. Ensure all external cabling including locations that are not secure such as sheds, covered areas, pool buildings, etc is installed in conduit and the conduit is arranged such that any water that may enter the conduit will immediately run out and not be trapped in the conduit. Minimise the extent of gel filled cable installed internally. Obtain approval of all internal runs of gel filled cable that are more than 30m. Do not use gel filled cable where the cable does not run externally.

Segregate the communications cables from other services by a minimum of 50mm. Increase the segregation distance as required to ensure the other services do not cause interference in the communications cabling.

For segregation between communications cabling and power cabling where a metallic earthed barrier is not present ensure:

- Where there are no more than 15 bunched circuits and all of the circuit are protected by an overcurrent device less than 60 Amps, a 200mm physical segregation is maintained.
- Where there are between 16 and 30 bunched circuits and all of the circuit are protected by an overcurrent device less than 60 Amps, a 300mm physical segregation is maintained.
- Where there are more than 30 bunched circuits and all of the circuit are protected by an overcurrent device less than 60 Amps, a 600mm physical segregation is maintained.
- Where any circuit is protected by an overcurrent device larger than 60 Amps a 600mm physical segregation is maintained.

For segregation between communications cabling and power cabling where a continuous metallic earthed barrier is present ensure:

- Where there are no more than 15 bunched circuits and all of the circuit are protected by an overcurrent device less than 30 Amps, a 50mm physical segregation is maintained.
- Where there are between 16 and 30 bunched circuits and all of the circuit are protected by an overcurrent device less than 30 Amps, a 100mm physical segregation is maintained.
- Where there are more than 30 bunched circuits and all of the circuit are protected by an overcurrent device less than 30 Amps, a 150mm physical segregation is maintained.
- Where there are no more than 15 bunched circuits and all of the circuit are protected by an overcurrent device less than 60 Amps, a 150mm physical segregation is maintained.
- Where there are more than 16 bunched circuits and all of the circuit are protected by an overcurrent device less than 60 Amps, a 300mm physical segregation is maintained.
- Where there are no more than 30 bunched circuits and all of the circuit are protected by an overcurrent device 60 Amps or more, a 300mm physical segregation is maintained.
- Where there are more than 30 bunched circuits and all of the circuit are protected by an overcurrent device 60 Amps or more, a 450mm physical segregation is maintained.

Ensure all UTP cabling is segregated from the following equipment by at least the dimension given:

- Segregate from all electrical appliances by more than 300mm.
- Segregate from all light fittings including remote control gear by more than 150mm.
- Segregate from all photocopiers and printers by more than 500mm.
- Segregate from all mains switching devices by more than 500mm.
- Segregate from all lighting system dimming equipment by more than 500mm.
- Segregate from all UPS less than 10kVA by more than 100mm.
- Segregate from all UPS between 10kVA and 30kVA by more than 300mm.
- Obtain a specific direction for the segregation distances for UPS larger than 30kVA.
- Segregate from all VSD controllers and VSD to motor cabling by more than 3,000mm.
- Segregate from all radio (wireless) transmitters by more than 3,000mm.
- Segregate from all thermostats by more than 500mm.

Ensure the communications cables are installed in dedicated compartments (separate to any power cabling) in all umbilical cable access ways associated with modular office systems. Additional separation or barriers are not required within the umbilical cable access ways. Ensure the ends of the umbilical cable access ways are arranged such that the minimum bending radius of the communications cables are not exceeded.

#### 6.2.1.2 UNSHIELDED TWISTED PAIR CABLING

UTP cables within bundles or on tray are to be laid randomly and not installed in straight lines.

Install cables so coils and any bends follow the natural spiral lay of the cable.

Do not bundle more than 24 UTP cables in the same bundle and do not mix different category UTP cables in the same bundle.

Ensure the untwist in a pair at the IDC termination is less than, 13 mm for category 5 cables and 5 mm for category 6 cables.

Ensure all permanent Category 6 cables have a minimum length of 15 m.

Secure Cat 6 cables with 6mm wide elastic Velcro™ ties applied at random spacing's up to 300mm apart on catenary wires and on vertical runs such that the weight of the cables are adequately supported.

Irrespective of the manufactures recommendations ensure that the bending radius is not less than 50 mm radius (100 mm dia) during cable pulling, and not less than 25 mm radius (50 mm dia) for hand placement.

Avoid the provision of spare cable where possible unless specifically called for. If spare cable is specified as being required locate the spare cable so it is fully supported and that the minimum bending radius is maintained. Do not locate the spare cable inside service poles or skirting ducts. If spare cable is contained in loops, ensure there are no more than 4 loops in a coil and each loop is a different diameter with minimum diameter of 300 mm.

Ensure the cable sheath stripped back at any termination less than 10 mm from termination module.

Provide all facility cable as unshielded twisted pair having the following characteristics:

- Ensure the facility cables do not exceed 90m in length.
- 24 AWG 0.51mm solid plain annealed copper conductors.
- 4 pair/8 conductors.
- The insulated conductors shall be twisted into pairs, with the pairs balanced for maximum performance and noise reduction.
- Colour coded high density PVC-V75 diameter 1mm insulation.
- PVC-V75 sheath.
- 100+/- 15 Ohm.
- Conductor DC Resistance (Max): 9.38 Ohm/100m @ 20°C.
- DC Resistance unbalanced (Max): 5% @ 20°C.
- Insulation Resistance (Min): 5000 MOhm/km @ 20°C.
- Mutual Capacitance (Typical): 5.6nF/100m.
- Characteristics impedance: 100Ohm+/- 3Ohm @ 100MHz.
- Worst Case Cable Skew : 25 nsec/100 meters

Ensure the length of each cable is based on the distance set out in the tables and formulas in ISO/IEC 11801 plus de-rating for ambient temperature.

#### 6.2.1.3 OPTICAL FIBRE CABLING

Provide all optical fibre cables with 1m of loosely looped cable within the FOBOT. Provide all loose tube cables with an additional 2m spare loosely looped cable at each end located either in the first pit or in a pre-approved location.

It is acceptable to install optical fibre cables on the same tray as the UTP provided the optical fibre cables are segregated from all other cables by either a physical barrier or by a separation distance of at least 25 mm.

Provide all unused optical fibre adaptors with a plastic dust cap.

All loose tube optical fibre cables are to be terminated by fusion splicing onto factory pre-terminated pigtails and tight buffered optical fibre cables are to be direct terminated or terminated by fusion splicing onto factory pre-terminated pigtails. All optical fibre connectors are to be provided with a ceramic ferrule connector with a physical contact pre-radiused ferrule installed by epoxying the connector onto the fibre end. All optical fibre connectors are to be secured to the FOBOT via a minimum of two bolts.

Crimp and adhesive type optical fibre terminations and connectors are not acceptable.

Ensure all fusion splicing complies with the following:

- Cleaved by a cleaver approved by the manufacturer providing the system warranty.
- Spliced by a fusion splicer approved by the manufacturer providing the system warranty.
- Provided with a protective sleeve.

#### 6.2.2 CONDUITS

Ensure the communication conduit fill rates do not exceed the following:

Cable type	Conduit Size				
	25mm	32mm	40mm	50mm	100mm
Internal 8 and 12 core optical fibres	4	6	10	15	65
External 8 and 12 core optical fibres	1	3	4	6	25
Cat 5 and Cat 6 UTP	4	7	12	18	75
10 pair UTP	2	3	6	10	35
25 pair UTP	1	3	3	4	20

Provide all above ground communications conduits with draw-in boxes at least every 30m or after the equivalent of two 90 degree bends whatever being the lesser distance. The draw-in boxes are to be located in straight runs of conduit and are not to be used for bends. Provide the draw-in boxes with an IP66 screw fixed lid and a conduit saddle within 50mm of the draw-in boxes on each conduit.

#### 6.2.3 SERVICE OUTLETS

Provide all UTP service outlets as clip in female RJ45 socket terminals, clipped into an outlet face plate. Mount the outlets with the keyway at the bottom and the contacts at the top. Provide the faceplates with a dust cover flap to prevent dust from entering the outlet when not in use. In locations where outlets are immediately adjacent, up to 6 outlets are to be accommodated on a single faceplate. The general communication outlet faceplates are to match the adjacent GPO in style, brand and colour. Ensure the outlets are a minimum of 150mm from the nearest power outlet contact.

Where there is insufficient depth behind the outlet to accommodate the cable bending radii, utilise angled faceplates. Obtain approval for the use of all angled faceplates prior to installation.

All cables must be arranged such that there is no Z bends or kinks in the cable behind the service outlet once it has been installed.

Ensure the UTP communications outlets have the following performance characteristics:

- Near End Crosstalk (NEXT) performance greater than 54dB @ 100MHz, and greater than 46dB @ 250MHz.
- RJ Interface resistance less than 20 mOhm
- Insulation resistance greater than 100 MOhm at 500 vDC
- Contact resistance less than of 20 mOhm
- Current rating greater than 2A at 20°C
- Rated for 1000 operations
- A contact force greater than 100g per contact using a FCC-approved plug.
- A plug retention force greater than 133 N.
- Rated for operation with a temperature range of -20°C to +75°C
- A minimum thickness hard gold contact plating on each pin of 1.3um
- A minimum thickness nickel contact plating on each pin of 2.0um under the gold coating.

#### 6.2.4 INSULATION DISPLACEMENTS CONNECTIONS (IDC)

Ensure all IDC's have the following performance characteristics and features:

- A minimum of 3 mechanical forces must be applied to the wire to provide a reliable and stress-free resistant connection.
- The IDC termination must have a 45 deg angular configuration when connecting with the cable conductor.
- The IDC contact element is to be spring special brass with silver plating, angularly arranged across the axis of the conductor.
- The contact range is to be silver-plated.
- The insulation displacement connectors of the outlets are to accept two insulated solid conductors of 26 to 22 AWG (0.40 - 0.65 mm) of the same size.
- Insulation resistance greater than 100 MOhm at 500 vDC
- Contact resistance less than of 20 mOhm
- Current rating greater than 2A at 20°C
- Rated for 1000 operations
- Rated for operation with a temperature range of -20°C to +75°C

#### 6.2.5 EARTHING

Provide a dual-purpose telecommunications earthing system for both functional earthing and protective earthing purposes. Bond each communications rack and frame to a Communications Earthing Terminal (CET) Block located not more than 10m away from the communications rack or distribution frame. Bond each CET to the local power distribution system protective earth. Provide permanent machine printed labelling on / adjacent the CET with the wording "Communications Earthing Terminal". All earthing conductors are to have green/yellow insulation and a stranded copper conductor with a minimum area of 6 mm<sup>2</sup>. Ensure each communications rack and frame has a resistance to earth of less than .5 ohm.

Earth a metallic cable access systems with a 2.5mm<sup>2</sup> stranded copper conductor with green/yellow insulation to the power distribution system protective earth and ensure the resistance to earth is less than 1 ohm.

#### 6.2.6 RECORDS AND LABELLING

Label every component within the communications cabling system including though not limited to, outlets, patch panels, break out panels, cables, patch leads, racks, distribution panels, consolidation points and cable access pathways. The labelling between all components is to correspond allowing all associations between the source and destinations to be readily made. All labelling is to be arranged logically and be consecutive. Use a dash between numbers and abbreviations without any spaces.

Confirm the naming standard of the outlets and patch panels with the school. The naming standard is a 2 letter building code with room number followed by a dash followed by a sequence number - e.g. JS12-35 (HM = John Smith room 12, outlet 35). The outlet sequence numbering starts at 1 and ends at the last number for the whole building. The naming standard is for the whole building, not per room.

Provide a machine printed label with the wording "Communications Cabling" on all communications cable pathways every 10 metres.

All names and labels are to read from bottom to top, left to right, omitting the letters "I" and "O".

Submit the labelling scheme for approval.

Provide each distribution panel and rack containing patch panels with a patching record book that contains the records of the connection of patch panel numbers to work station outlet numbers, the date and signature of the patching installer, a schematic drawing and a floor plan of the area detailing the location and labelling of all communications outlets and equipment within the area the associated panel or rack serves. Ensure the log book is able to simply accommodate future additions, moves and changes and it contains at least 50% or three, whatever is the lesser, spare pages. All entries in the log book are to be legible and only in pencil. Clearly designate the sites name and the name of the distribution panel or rack the log book applies to on the cover and on every page of the log book.

Submit a blank example page from the log book for approval.

Provide the data room with a wall mounted laminated A3 floor plan of each level detailing the location and labelling of all communications outlets and equipment within the area the associated panel or rack serves. Include a copy of the floor plan in the Operations and Maintenance Manual.

Ensure all racks and distribution panels are uniquely identified with the label located on the external face of any door or cover that is normally closed and on the body if the door or cover is removable or lift off. For all racks and equipment that are floor mounted, provide the unique identifying label on both the front and rear doors / covers and the body.

Provide a machined typed label either clear wrap around self-adhesive type or slip-on plastic ring type or a long plastic strip type fixed onto each permanent cable within 100 - 150mm from the termination point for UTP cabling and 200 - 400mm for Optical Fibre cabling. In addition to the end labelling, provide a label on each Optical Fibre cable at each side of every penetration and at intervals no greater than 10m. Each cable label is to designate the cable type, size and source / destination.

Permanently label each communications outlet with the channel number in accordance with clause 2.9. In addition to the label that is normally visible, neatly hand write in indelible ink the channel number on the faceplate behind the surround such that it is covered when the faceplate is in place.

## **6.3 COMMISSIONING**

### **6.3.1 GENERAL**

As part of the commissioning of the communications cabling, undertake the following tests as relevant on all components of the communications cabling installation including each pair in every cable for:

- Has been fully commissioned in accordance with this specification.
- Has been fully commissioned in accordance with the requirements of the system manufacturer.
- Compliance with the cabling diagram.
- Continuity.
- Cable location, identification and length.
- The installation of all cables must be complete and the cables and terminations cleaned prior to testing.
- All tests in accordance with the communication system certifying manufacturer's requirements.
- Undertake all tests in accordance with the recommendation of the testing equipment manufacturer.
- Test the resistance to earth of each Communications Earthing Terminal (CET) Block, each communications rack and each frame.
- Test the resistance to earth of each metallic cable access system.

### **6.3.2 UNSHIELDED TWISTED PAIR CABLING**

Test every UTP cable / link in accordance with the following requirements:

- Correct sequence.
- Reversed pairs.
- Transposition and split pairs.
- Attenuation.
- Impedance matching of all twisted pairs within each UTP cable in the form of impedance Vs distance and impedance Vs frequency graphs.
- All mechanical fixings.
- Electrical length.
- The difference between the signal attenuation and the near-end cross talk (ACR).
- Power Sum ARC (PSARC)
- Near End Cross Talk (NEXT).
- Power Sum Near End Cross Talk (PSNEXT)
- Insertion Loss,
- ELFEXT, PSELFEXT.
- Return Loss.
- Delay Skew.
- Propagation Delay.
- All Cat 5 cables and components are to be tested in accordance with the requirements specified in the latest draft of ISO 11801 Class D.
- All Cat 6 cables and components are to be tested in accordance with the requirements specified in the latest draft of ISO 11801 Class E.

The UTP cables / links are to meet or better the following requirements:

	Cat 5	Cat 6
Correct sequence.	Pass	Pass
Reversed pairs.	Pass	Pass
Transposition and split pairs.	Pass	Pass
Attenuation.	24 dB	21.7 dB
All mechanical fixings.	Pass	Pass
Electrical length.	<90m	<90m
ACR	6.1 dB	18.2 dB
PSARC	3.1 dB	15.4 dB
NEXT	30.1 dB	33.9 dB
PSNEXT	27.1 dB	37.1 dB
Insertion Loss,	24 dB	21.3 dB
ELFEXT	17.4 dB	23.2 dB
PSELFEXT.	14.4 dB	20.2 dB
Return Loss.	10 dB	12 dB
Delay Skew.	50nsec	50nsec
Propagation Delay.	548nsec	548nsec

Tester and testing equipment

- Ensure the tester batteries are adequately charged and do not fall below 25% of the total battery capacity.
- Ensure all test gear and equipment is not worn, dirty and is in good as new working order.
- Ensure the NVP is not set HIGHER than specified for the cable.

- Ensure the tester “Margin Warning” or “Star-Pass” is always enabled during testing.
- The latest software available for the tester is being used.
- The tester has been independently calibrated within 12 months of the test.

Configure the tester for Cat 6 cabling as (F/UTP PVC 65% / UTP LSZH 79% / UTP PVC 69%), permanent Link Test limit to ISO 11801 Class E and channel test limit to ISO 11801 Channel Class E.

Configure the tester for Cat 5 cabling as (F/UTP PVC 69% / UTP LSZH 70% / UTP PVC 69%), permanent Link Test limit to ISO 11801 Class D and channel test limit to ISO 11801 Channel Class D.

The following testers are acceptable:

- Fluke DTX-18003.
- Fluke DTX-1200
- LANTEK 6A and 7G
- LANTEK II
- Agilent WireScope Pro
- Agilent WireScope WS350

Negative results (eg - 0.5 dB) for NEXT or RL on runs less than 15m even though a PASS is indicated in the test results are unacceptable and must be considered as unacceptable terminations.

Poor UTP terminations must be fixed by adding twist into the pairs, re-terminated and re-tested.

### 6.3.3 OPTICAL FIBRE CABLING

Test every Optical Fibre core in accordance with the following requirements:

- Undertake all testing in accordance with the requirements of ISO/IEC 14763-3 and ISO/IEC 11801, using Light Source and Power Meter (LSPM). An OTDR is not acceptable for Link loss measurements.
- The optical attenuation of each fibre core at 2 appropriate wavelengths must be tested after installation in both directions (A to B and B to A) including pre terminated cables. Only the single highest test result of each wavelength from either direction needs to be recorded (to 1 decimal place).
- Continuity and Maintenance of Polarity
- Length
- Propagation Delay
- Each termination must be visually inspected as part of the commissioning and be noted as being free of abnormalities
- Record the overall configuration of the link including connector types, cable type and length and number of splices.
- OTDR test results alone are not acceptable.

Provide a Light Source & Power Meter (LSPM) and an Optical Time Domain Reflectometer (OTDR). Ensure all optical fibre testers have been warmed up for 15 minutes prior to commencing testing.

Where LSPM results exceed the Power Loss allowance, use an OTDR to determine the location of the faulty component.

Where the connectors on the LSPM tester are different from the connectors on the Link to be tested (E.g. SC on tester Receive port and MTRJ on Link), use the 3-Test Cord Method of Reference Setting as per CI 9.1.1.2 of ISO/IEC 14763-3.

Ensure the continuity and polarity of each optical fibre core / termination by either inspecting opposite ends at the same time with a red light source, or by using an LSPM that has been connected to the fibre at the far end, or by using an OTDR with a ‘tail cord’ connected to the correct fibre at the far end.

Record the cable length marking at each end of the installed cable.

Record the propagation delay on the test sheet by manually calculating it or as recorded by the tester. The propagation delay is to be manually calculated as (propagation delay (in nS) = 5.0 x length in m.

Ensure the connectors on the LSPM tester are the same as the connectors on the core being tested.

Ensure the LSPM Tester is able to meet Encircled Flux requirement in the launch test cord for all multimode cables. Ensure 3mm LSPM launch cords have at least 5 x turns of 17 mm diameter for 62.5 µm and 22 mm diameter for 50 µm cores. Ensure the LSPM launch cord has at least 2 x turns of 40±5 mm diameter, air-coiled or on a mandrel, for all singlemode cables. Ensure the launch cord meets the reference conductor requirements and the tail cord insertion loss is less than 0.1 dB for multimode cables and 0.2 dB for single mode cables. The performance of the launch and tail cords are to be confirmed at the start of testing every day and at least once every four hours of continuous testing.

Ensure the OTDR launch and tail cords are longer than the dead zone of the OTDR and the launch cord is at least 25% longer than the tail cord. Use the lowest OTDR pulse width on cables that are less than 300m long. Configure the OTDR and test setup so ghosts are not present in the main part of the OTDR trace.

#### 6.3.4 TEST RESULTS

Provide a copy of the "Plot Data Enabled" test results for each UTP cable and each core of each optical fibre cable in a recognised test vendor's application format such as Fluke LinkWare or Agilent DataScope Pro or LANTEK Reporter as well as a copy of all results in PDF. Ensure the test results contain all of the testing and commissioning information required by section 6.3. Ensure the test results are / include:

- A single file containing all the final commissioning and test results.
- All results and data are relevant to this project.
- The number of test results the number the number of test results on the communications system manufactures system warranty form.
- An explanation is provided for all missing cable identification.
- Include a copy of all test results in the Operations and Maintenance Manual.

Supply a copy of the latest NATA calibration certifications for test instruments that are to be used, before any testing commences.

Schedule the results for each item and component and include a copy of test results in the Operations and Maintenance Manual.

As part of the commissioning of the communications cabling, undertake any necessary adjustments to components of the communications cabling installation which have integral adjustment capacity.

#### 6.4 EQUIPMENT RACK

Provide sufficient equipment racks which include the following to accommodate all space, spares ring rungs and patch panels to the following requirements:

- Enclosed, corrosion-resistant metal unit and is suitable for direct mounting of industry standard 19-inch wide equipment.
- Provide floor mounted racks with casters.
- Provide wall mounted as hinged "Swing Frame" construction type racks with an open back.
- Ensure wall mounted racks are mounted onto masonry walls or the wall is specifically provided with additional fixing points to support a 50kG wall mounted rack. Ensure all wall mounted racks are secured by no less than four 6mm corrosion resistant bolts.
- Full height racks are to be provided with a minimum of 41 RU
- Lockable glass lift-off door hinged to open outward in an appropriate direction
- 6 port fixed power board c/w flex and plug, horizontally mounted in racks not larger than 12 RU. Connect the power board to the power outlet provided for the rack.

- 2 x 6 port fixed power boards each c/w flex and plug, vertically mounted in racks larger than 12 RU with one power board mounted on each side outside of the mounting rails at the rear of the rack. Connect the first power board to the power outlet provided for the rack and the second [power board to one of the ports on the first power board.
- Ensure all of the power board flex cable is neatly secured and appropriately segregated from the communications cabling.
- Removable lockable ventilated sides if the side is not hard against another rack.
- 25% additional spare space with blank infill panels.
- Flat vented top and bottom lids.
- A 127mm cable management 1RU horizontal ring rung for every 48 UTP patch ports and every 2RU of FOBOTs. Ensure the front and/or rear vertical rails of the rack are set back a minimum of 80mm or greater as required to accommodate the cable management ring rungs.
- Configure the rack that all expected equipment and catch cables can be installed without restricting the closure of the door.
- Internal vertical 150mm wide slotted cable tray on each side at the rear of the rack outside of the mounting rails. All cable looms are to be located outside of the mounting rails.
- For racks larger than 38 RU provide front and rear adjustable 19" mounting rails, adjustable over the full depth of the rack. Allow to adjust the rails on site as directed by the operator.
- 1 x Full depth fixed shelf unit for every 22 RU or part thereof.
- A 20 x cabinet cage nut and bolt set for every 22 RU or part thereof.
- Appropriate top and bottom cable entry holes.
- All accessories as necessary to meet the ACMA requirements.
- Provide a minimum of 15mm between communication terminals and any exposed conductive material. Insulate earth link bars or earth strips from any conductive material on the body of the housing.
- Provide the power outlets for wall mounted racks on the wall such that they are covered by the rack.
- Provide the power outlets to island floor mounted racks as captive or locking pendant outlets with the underside of the outlet 150mm above the top of the rack.
- Provide the power outlets to floor mounted racks located against a wall as captive or locking wall mounted outlets with the underside of the outlet 150mm above the top of the rack.
- Ensure all earthing cabling is to be clearly visible and accessible for inspection when the rack door is open.
- All communications cable within the rack is to be neat and appropriately secured.
- Unless noted otherwise arrange the rack with the FOBOTs at the top of the rack, block cabling termination (if provided) below the FOBOTs, the facility cabling patch panels below the FOBOTs and block cabling terminations and the active equipment below the facility cabling patch panels.

Submit details of each rack including the proposed equipment layout for approval. Once approved include a copy of all such information in the Operations and Maintenance Manual.

## 6.5 PATCH PANELS

Provide UTP patch panels as modular, 1RU high, 24 port, Cat 6, RJ45 19inch rack mounted, black fully numbered with outlets to the same specification and performance as the respective service outlets with the worst pair NEXT loss values for the outlet greater than 54dB at 100MHz and greater than 46dB at 250MHz. The rear of the patch panels are to be provided with integrated cable management supports, strain relief posts, colour coded wiring guides and IDC's to facilitate cable termination. Provide patch panels with modular ports that can be removed and that facilitate access to the IDC's without having to remove the entire patch panel.

Provide sufficient patch panels to accommodate all of the facility cabling with a dedicated patch panel port for each service outlet. Provide sufficient patch panel ports to accommodate all of the tie cables with 2 pairs per patch panel port for tie cables.

## 6.6 OPTICAL FIBRE TERMINATION PANELS (FOBOTs)

Provide optical fibre termination panels to facilitate all optical fibre cross-connecting, interconnecting and splicing.

Provide the adaptor plates, installed to angle the through panel. Ensure the adaptor ports accommodate labelling and identification of each core.

Provide the rack mounted optical fibre termination panels as a swing tray or removable lid, 19 inch rack mounted 24 port 1 RU housings with an open / slotted rear, grommet fibre retainers, integral strain relief posts and fibre storage guide facilities.

Provide the wall mounted optical fibre termination panels as a proprietary wall mounted enclosure with a removable cover, grommet fibre retainers, integral strain relief posts and fibre storage guide facilities.

Provide blank caps to infill all unused adaptor spaces.

Provide each optical fibre termination panel with a notice describing the procedures for handling of optical devices, permanently fixed in a prominent position.

## 7.0 SECURITY

### 7.1 SCOPE

DJF Security – Dan Farago 0451 871 932 [dan@djfsecurity.com](mailto:dan@djfsecurity.com) is to be engaged as a nominated sub-contractor to the electrical sub-contract to undertake the security works.

The security system component of this contract includes the expansion of the schools existing Inner Range Integrity security system into the building to provide intruder detection and access control.

***Provide the BMS panel in the main level 1 mechanical plant room with a low-level signal to indicate the arming status of the security system to the BMS. Coordinate the connection with the BMS contractor on site.***

All security panels including any expander panels must be located within the level 1 data room.

Connect the building security equipment to the existing system via the schools Ethernet network via a COLE Ethernet bridge. The Ethernet settings are to be coordinated with the schools IT staff.

The security system component of this contract includes but is not limited to the following extent of work:

- Intruder detection system power supply and distribution.
- Earthing.
- Movement detectors.
- Piezo Alarms.
- Key panels.
- Zone expanders.
- Ethernet bridges.
- Card readers.
- Door controllers.
- Auto door interfaces.
- Roller shutter door interfaces.
- Data bus.
- Cabling.
- Conduit access.

The electric strikes and cable transfer hinges will be provided by the contractor and installed into the door frame in the door frame prior to delivery to site.

All suppliers and sub-contractors to the Electrical Sub Contractor must ensure they are familiar with and comply with the requirements of sections 1.0, 2.0 and 3.0 of this specification

### 7.2 INSTALLATION

Use multi-stranded copper conductor V75 PVC insulated or V75 PVC-insulated and PVC-sheathed stranded cables for all 240 volt cabling. Use flooded PVC insulated and PE sheathed cables for all cables run underground.

The cable type and sizes indicated on the drawings are provided as a minimum only. The attenuation, interference and voltage drop of the cables must be established by the Electrical Sub Contractor and the cables sized accordingly by the Electrical Sub Contractor. Size all cables to accommodate the respective signals, loads and maintain a spare capacity of 10%. All signals and loads must be confirmed on site by the Electrical Sub Contractor with the actual equipment being supplied. Provide the detector cabling as solid Cu PVC PVC 6 core intruder detection cable and the reed switch cabling as solid Fig 8 Cu PVC cable. Where security system equipment is connected by a communications cable, provide the cable in accordance with the security system manufacture's requirements. Provide configuration, route, pinout and earthing details of such communications cables with the shop drawings.

Install all cabling clear of electric motors, neon signage, transformers etc. In locations with a high level of RF or EM radiation, ensure that the cables are properly shielded from interference.

Segregate the security system cables from other services.

Ensure all enclosures are appropriate for the location they are intended to be installed in and have appropriate space and capacity to contain all equipment and cabling in the final configuration.

The accessories sizes indicated on the drawings are provided as a minimum only. All components and sizes must be confirmed on site with the actual equipment being supplied.

### **7.3 COMMISSIONING**

As part of the commissioning, ensure all components of the security system are adjusted, programmed and are operating correctly.

Ensure the following components of the security system installation are complete and have been checked and tested prior to the adjusting and aiming of the security system installation to commence:

- Labelling.
- Correct operation of the security system.
- All components have been installed and are operating.

Should these items not be complete prior to the adjusting and aiming of security system installation the additional expenses in re-attending the installation to undertake the adjusting and aiming of the security system installation as incurred by the engineer will be charged to the nominated security Sub Contractor.

Provide all equipment such as ladders, scaffolding and tools necessary for adjusting each detector. Should the nominated security Sub Contractor not have available the necessary equipment to complete the adjusting and aiming of the security system installation, the additional expenses in re-attending the installation to undertake the adjusting and aiming of the security system installation as incurred by the engineer will be charged to the nominated security Sub Contractor.

The adjusting and aiming of the security system installation will include the following:

- Adjusting mountings and brackets.
- Aiming of detectors.
- Testing all operations of the security system.

Program the security system to the satisfaction of the school.

The nominated security sub-contractor is to allow to attend site twice during the defects and liability period and undertake any required adjustments to and reprogram the security system as directed by the school.

## 8.0 PA SYSTEM

### 8.1 SCOPE

The PA component of this contract includes the provision of a conventional 100 volt speaker / horn system throughout the internal and external works area with each speaker / horn cabled in star configuration back to two conventional audio power amplifiers each sized equally to accommodate 80% of the speakers / horns.

Locate the amplifier in the top RUs of CR-A.

Ensure the amplifier is 'always on', and will automatically return to being 'always on' after a power loss incident. The School will provide the audio input to the amplifier, please provide a Male 3.5mm Stereo TRS Connector for each zone.

Provide all necessary amplifiers such that any individual amplifier is not loaded above 50% capacity as if the speakers and horns are all tapped at 75%.

The PA System component of this contract includes but is not limited to the following extent of work:

- Speakers and horns.
- Amplifiers
- Cabling.
- Programming.
- Commissioning.

Provide an audio input for testing. Balance and set the volume of the PA System to the satisfaction of the school. Allow to attend site twice during the defects and liability period to adjust the balancing and volume as directed by the school.

Provide comprehensive details of the proposed equipment and components of the PA system for approval.

### 8.2 INSTALLATION

#### 8.2.1 CABLING

For all 240 volt cabling use multi-stranded 2.5mm<sup>2</sup> copper conductor V75 PVC insulated or V75 PVC insulated and PVC sheathed stranded cables unless otherwise specified. Use PVC insulated and PVC sheathed cables for all cables run underground in conduits.

The cable type and sizes indicated on the drawings are provided as a minimum only. The attenuation, interference and voltage drop of the cables must be established by the Electrical Sub Contractor and the cables sized accordingly by the Electrical Sub Contractor. Size all cables to accommodate the respective signals, loads and maintain a spare capacity of 10%. All signals and loads must be confirmed on site by the Electrical Sub Contractor with the actual equipment being supplied.

Provide the Figure 8 cable to the following characteristics:

- Dual colour PVC insulation.
- 2 off 19 AWG conductors.
- 24/0.20 stranded bare copper conductors.

Terminate the Figure 8 cables into screw terminals.

Run all PA System cabling clear of electric motors, neon signage, transformers etc. In locations with a high level of RF or EM radiation, ensure that the cables are properly shielded from interference. Ensure all of the PA system cabling is segregated from all other services.

#### 8.2.2 HOUSINGS

Ensure all enclosures are appropriate for the location they are intended to be installed in and have appropriate space and capacity to contain all equipment and cabling in the final configuration.

#### 8.2.3 ACCESSORIES

The accessories' sizes indicated on the drawings are provided as a minimum only. All components and sizes must be confirmed on site by the Electrical Sub Contractor with the actual equipment being supplied.

#### 8.2.4 POWER SUPPLY

Ensure all power supplies to the PA system equipment within a building are from the same phase.

#### 8.3 COMMISSIONING

Allow to undertake the full commissioning of the PA system at practical completion and at two further times during the defects and liability period as requested by the school.

As part of the commissioning of the PA System, undertake the following tests as relevant on all components of the PA System installation:

- Phase sequence.
- Power availability.
- Resistance to earth.
- Sound levels.
- Fault protection.
- All mechanical fixings.

#### 8.4 AMPLIFIERS

Provide amplifiers with the following characteristics:

- 19 inch rack mounted.
- 8 ohm and 100 volt output.
- Balanced XLR auxiliary output.
- Steel chassis and heat sinks.
- Integral on/off switch.
- Master bass control.
- Master treble control.
- Master volume control.
- Black.
- 240 volt mains supply.
- 19 inch rack mounted.
- Mains fused.
- THD <5%.
- Frequency response 60 Hz to 15 kHz.
- An output impedance is between 80 and 200 ohms.



# **ELECTRICAL DESIGN GROUP**

**ELECTRICAL BUILDING SERVICES CONSULTANTS**

P.O. Box 15, SHERWOOD Q. 4075

Phone: (07) 3278 4375

Web Site: [www.edg.net.au](http://www.edg.net.au) Email: [brisbane@edg.net.au](mailto:brisbane@edg.net.au)

---

24 October 2024

Reference: C3328a – Ormiston College - CLI  
Mobile Phone Booster System Scope  
Revision B

Engage Telco Antennas Pty Ltd Units 3-6, 1 Roebuck St, Hemmant, 4174 PHONE +617 3393 9919 MOBILE +61418181155 Email: [lennon.wiki@telcoantennas.com.au](mailto:lennon.wiki@telcoantennas.com.au) to provide a mobile phone booster system as per the following scope:

Qty	SKU	Name
3	G41	Cel-Fi GO G41 Smart Signal Repeater for the Telstra or Optus or Vodafone / TPG Networks
3	LPDA7030-11	RFI Wideband 8-12dBi 3G+4G+4GX+5G LPDA Antenna - 700-3800MHz <ul style="list-style-type: none"> <li>Choose Connector &amp; Cable: 10m LMR195 cable with SMA-Male connector</li> </ul>
1	TF-RM-GTR_20	Heavy Duty Galvanised Tin Roof Mount 50mm - 2.0m
3	400-N-SMA-10	LCU400 10m Coaxial Cable - N Male to SMA Male
2	MHC-638-3-N	Telco Hybrid Coupler - N Female - 3x3 Ports - 694-3800MHz
2	DAS-7-38-CM-N	Telco DAS MiMo Omnidirectional Ceiling Antenna - 700-3800MHz
1	SP0000-6005-12	Cable Termination Load - 5W DC-2400MHz
3	400-N-SMA-5	LCU400 5m Coaxial Cable - N Male to SMA Male
2	400-N-N-15	LCU400 15m Coaxial Cable - N Male to N Male
2	400-N-N-20	LCU400 20m Coaxial Cable - N Male to N Male
1	INTERNAL-CUSTOM-PRODUCT	Custom Product (Physical) <ul style="list-style-type: none"> <li>Specifications: EWP Hire + Delivery TBD</li> </ul>
1	TA-IS-AW	Installation Services - Australia Wide <ul style="list-style-type: none"> <li>Installation Notes:</li> </ul>



# ELECTRICAL DESIGN GROUP

## ELECTRICAL BUILDING SERVICES CONSULTANTS

P.O. Box 15, SHERWOOD Q. 4075

Phone: (07) 3278 4375

Web Site: [www.edg.net.au](http://www.edg.net.au) Email: [brisbane@edg.net.au](mailto:brisbane@edg.net.au)

24 October 2024

Reference: C3328a – Ormiston College - CLI  
AV System Scope  
Revision B

Engage Troy Hargreaves Mobile 0419 566 102 Email [troyrobert93@outlook.com](mailto:troyrobert93@outlook.com) Address 3 Needlewood Street, Redbank Plains, 4301 to provide an AV SYSTEM within the Flexible Learning Spaces as per the following scope:

- A control system that is either Crestron, AMX or QSYS
- TV to be either LG, Sony, Samsung or Philips
- 16 Speakers flush mount in ceiling per room
- A Bose DSP to control the zones and room joining as well as the mic and audio inputs
- 1 x handheld 1 x lapel mic for each room
- A 5" touch screen for each room to control the system.
- A 24 RU rack
- 2 NVX boxes and a dual HDMI input plate.

### Summary

#### Equipment and Services

Room 1	1	Room 1
VPHELPDESK1	1	VP HELP DESK 1YR

#### Optional Service Level Agreements to replace VP HELP DESK 1YR 0.00

VPSLAEC1	1	VP SERVICE LEVEL AGREEMENT ESSENTIAL CARE 1YR <small>2 Included service hours per annum. Discounted hourly recharge option available. For a complete list of benefits, please refer to SLA brochure</small>
VPSLAECPLUS1	1	VP SERVICE LEVEL AGREEMENT ESSENTIAL CARE PLUS 1YR (Recommended) <small>4 Included service hours per annum. Discounted hourly recharge option available. For a complete list of benefits, please refer to SLA brochure</small>
VPSLAPC1	1	VP SERVICE LEVEL AGREEMENT PLATINUM CARE 1YR <small>12 Included service hours per annum. Discounted hourly recharge option available. For a complete list of benefits, please refer to SLA brochure</small>

Qty	Detail
<b>Room 1 - Room 1</b>	
<b>Audio Equipment - Items</b>	
DS16FW	32.00 BOSE SPEAKER MODEL 16 FLUSH MOUNT 70/100V WHITE Covered by Help Desk 1 year (P) SLA, Includes 12 mths manufacturer warranty
SPA2200	1.00 QSC POWER AMPLIFIER 2 X 200W @ 4/8 OHM Covered by Help Desk 1 year (P) SLA, Includes 12 mths manufacturer warranty
SHRSLX12485L4	2.00 SHURE MIC SYS SLX1/WL185 SLX2/SM58 SLX4 638-662MHZ Covered by Help Desk 1 year (P) SLA, Includes 12 mths manufacturer warranty
EX1280C	1.00 BOSE EX-1280C DSP, 1RU Covered by Help Desk 1 year (P) SLA, Includes 12 mths manufacturer warranty
CWPLH638011	2.00 CLIPSAL PLATE 3.5MM AUDIO WITH TEXT & LOGO Covered by Help Desk 1 year (P) SLA, Includes 12 mths manufacturer warranty
CWPFH202	2.00 CLIPSAL PLATE WHITE 2 X HDMI WITH TEXT Covered by Help Desk 1 year (P) SLA, Includes 12 mths manufacturer warranty
<b>Control Equipment - Items</b>	
DMNVX351	2.00 CRESTRON AVOIP ENCODER/DECODER Covered by Help Desk 1 year (P) SLA, Includes 12 mths manufacturer warranty
TSW560BS	2.00 CRESTRON 5" TOUCH SCREEN BLACK SMOOTH Covered by Help Desk 1 year (P) SLA, Includes 60 mths manufacturer warranty
SG350X24PK9AU	1.00 CISCO 24 PORT GIGABIT POE STACKABLE SWITCH Covered by Help Desk 1 year (P) SLA, Includes 12 mths manufacturer warranty
<b>Miscellaneous - Items</b>	
FREIGHT	1.00 FREIGHT Covered by Help Desk 1 year (P) SLA
CABLE	1.00 CABLES, CONNECTORS AND GENERAL MATERIALS Covered by Help Desk 1 year (P) SLA
RT12URACK545	1.00 REVTEK RACK 12RU 19" 545MM DEEP Covered by Help Desk 1 year (P) SLA, Includes 12 mths manufacturer warranty
RT1UPR8B	2.00 REVTEK POWERRAIL 8WAY RECESSED 1RU TUL-AUS(10) Covered by Help Desk 1 year (P) SLA, Includes 12 mths manufacturer warranty
<b>Engineering Services - Items</b>	
INSTALL	1.00 INSTALLATION SERVICES

Qty	Detail
INSTALL	1.00 CABLING Covered by Help Desk 1 year (P) SLA
DESIGN	1.00 DOCUMENTATION Covered by Help Desk 1 year (P) SLA
PROGRAM	1.00 CONTROL SYSTEM PROGRAMMING SERVICES Covered by Help Desk 1 year (P) SLA
PROJECT	1.00 PROJECT MANAGEMENT Covered by Help Desk 1 year (P) SLA
PROGRAM	1.00 TESTING AND COMMISSIONING Covered by Help Desk 1 year (P) SLA



# ELECTRICAL DESIGN GROUP

## ELECTRICAL BUILDING SERVICES CONSULTANTS

P.O. Box 15, SHERWOOD Q. 4075

Phone: (07) 3278 4375

Web Site: [www.edg.net.au](http://www.edg.net.au) Email: [brisbane@edg.net.au](mailto:brisbane@edg.net.au)

10 October 2024

Reference: C3328a – Ormiston College - CLI  
Video System Scope  
Revision A

Provide a video system as per the following scope:

### Summary

#### Equipment and Services

Room 1	1	G.26 Cafe
Room 2	1	G.08 Library Reception
Room 3	1	G.14-G.17 Incubators
Room 4	1	LED Walls
Room 5	1	G.03 Media Lounge
Room 6	1	1.02 IT Reception
Room 7	1	G.04 Foyer
Room 8	1	Tuckshop
Room 9	1	Marketing
Room 10	1	Studio
Room 11	1	Streaming Service
Room 12	1	Rack
Room 13	1	Services
Room 14	1	iPads Control
Room 15	1	Back-Up Products
VPTCP4	1	4 YEAR TOTAL CARE PACKAGE

### Room 1 - G.26 Cafe

#### Equipment

43LV340C	3.00	LG 43" DIRECT LED FHD INTEGRATE TUNER STAND <small>, Includes 36 mths manufacturer warranty with additional 12 mths provided by 4 YEAR TOTAL CARE PACKAGE</small>
943AB	3.00	REVTEK BRACKET TILT 37-65" LCD/PLASMA 60KGS BLACK <small>, Includes 12 mths manufacturer warranty - excluded from any additional cover provided by 4 YEAR TOTAL CARE PACKAGE</small>
DMNVX350	3.00	CRESTRON DM 4K60 4:4:4 HDR NETWORK AV ENCODE/DEC <small>, Includes 60 mths manufacturer warranty - excluded from any additional cover provided by 4 YEAR TOTAL CARE PACKAGE</small>

#### Services

OFE	1.00	*VIDEOPRO ARE PROVIDING 3 X OPEN HDMI FEED FOR SCHOOL PC/NUC **COLLEGE TO PROVIDE PC/NUC ONCE DECIDED ON
-----	------	---

### Room 2 - G.08 Library Reception

#### Equipment

43LV340C	3.00	LG 43" DIRECT LED FHD INTEGRATE TUNER STAND <small>, Includes 36 mths manufacturer warranty with additional 12 mths provided by 4 YEAR TOTAL CARE PACKAGE</small>
944AB	3.00	REVTEK BRACKET 37-65" LCD/PLASMA FLAT MOUNT 60KG <small>, Includes 12 mths manufacturer warranty - excluded from any additional cover provided by 4 YEAR TOTAL CARE PACKAGE</small>
TSW1060BS	1.00	CRESTRON TOUCH PANEL 10.1" SURFACE MOUNT BLACK <small>, Includes 60 mths manufacturer warranty - excluded from any additional cover provided by 4 YEAR TOTAL CARE PACKAGE</small>
DMNVX350	3.00	CRESTRON DM 4K60 4:4:4 HDR NETWORK AV ENCODE/DEC <small>, Includes 60 mths manufacturer warranty - excluded from any additional cover provided by 4 YEAR TOTAL CARE PACKAGE</small>

## Services

OFE	1.00	"VIDEOPRO ARE PROVIDING 3 X OPEN HDMI FEED FOR SCHOOL PC/NUC **COLLEGE TO PROVIDE PC/NUC ONCE DECIDED ON
-----	------	---

### Room 3 - G.14-G.17 Incubators

#### Equipment

HILU65203	4.00	HITACHI FLAT PANEL 65" INTERACTIVE UHD 4K Includes 60 mths manufacturer warranty - excluded from any additional cover provided by 4 YEAR TOTAL CARE PACKAGE
SBWD960A	4.00	ACTIONTEC SCREENBEAM 960 WIRELESS DISPLAY RECEIVER Includes 24 mths manufacturer warranty with additional 24 mths provided by 4 YEAR TOTAL CARE PACKAGE
DRHDMIPRO5M	4.00	DIGITAL ROPE PRO SERIES HDMI CABLE 5M excluded from any additional cover provided by 4 YEAR TOTAL CARE PACKAGE
944AB	4.00	REVTEK BRACKET 37-65" LCD/PLASMA FLAT MOUNT 60KG Includes 12 mths manufacturer warranty - excluded from any additional cover provided by 4 YEAR TOTAL CARE PACKAGE
TSW560BS	4.00	CRESTRON 5" TOUCH SCREEN BLACK SMOOTH Includes 60 mths manufacturer warranty - excluded from any additional cover provided by 4 YEAR TOTAL CARE PACKAGE
PWE4803RU	4.00	CRESTRON POE INJECTOR Includes 60 mths manufacturer warranty - excluded from any additional cover provided by 4 YEAR TOTAL CARE PACKAGE
DMNVX350	4.00	CRESTRON DM 4K60 4:4:4 HDR NETWORK AV ENCODE/DEC Includes 60 mths manufacturer warranty - excluded from any additional cover provided by 4 YEAR TOTAL CARE PACKAGE

### Room 4 - LED Walls

#### Equipment

DMNVX350	2.00	CRESTRON DM 4K60 4:4:4 HDR NETWORK AV ENCODE/DEC Includes 60 mths manufacturer warranty - excluded from any additional cover provided by 4 YEAR TOTAL CARE PACKAGE
----------	------	---

#### Services

MISC	1.00	LED WALL X 2 - NOT SUPPLIED BY VIDEOPRO excluded from any additional cover provided by 4 YEAR TOTAL CARE PACKAGE
------	------	---

### Room 5 - G.03 Media Lounge

#### Equipment

DRHDMIPRO5M	1.00	DIGITAL ROPE PRO SERIES HDMI CABLE 5M excluded from any additional cover provided by 4 YEAR TOTAL CARE PACKAGE
75UM3C	1.00	LG LED 75" COMMERCIAL UHD PANEL 3YR Includes 36 mths manufacturer warranty with additional 12 mths provided by 4 YEAR TOTAL CARE PACKAGE
939LB	1.00	REVTEK BRACKET H/DUTY LCD FLAT 100KG 800X600 W/SEC Includes 12 mths manufacturer warranty - excluded from any additional cover provided by 4 YEAR TOTAL CARE PACKAGE
SBWD960A	1.00	ACTIONTEC SCREENBEAM 960 WIRELESS DISPLAY RECEIVER Includes 24 mths manufacturer warranty with additional 24 mths provided by 4 YEAR TOTAL CARE PACKAGE
TSW560BS	1.00	CRESTRON 5" TOUCH SCREEN BLACK SMOOTH Includes 60 mths manufacturer warranty - excluded from any additional cover provided by 4 YEAR TOTAL CARE PACKAGE
PWE4803RU	1.00	CRESTRON POE INJECTOR Includes 60 mths manufacturer warranty - excluded from any additional cover provided by 4 YEAR TOTAL CARE PACKAGE
DMNVX350	1.00	CRESTRON DM 4K60 4:4:4 HDR NETWORK AV ENCODE/DEC Includes 60 mths manufacturer warranty - excluded from any additional cover provided by 4 YEAR TOTAL CARE PACKAGE

### Room 6 - 1.02 IT Reception

#### Equipment

43LV340C	1.00	LG 43" DIRECT LED FHD INTEGRATE TUNER STAND Includes 36 mths manufacturer warranty with additional 12 mths provided by 4 YEAR TOTAL CARE PACKAGE
944AB	1.00	REVTEK BRACKET 37-65" LCD/PLASMA FLAT MOUNT 60KG Includes 12 mths manufacturer warranty - excluded from any additional cover provided by 4 YEAR TOTAL CARE PACKAGE
TSW1060BS	1.00	CRESTRON TOUCH PANEL 10.1" SURFACE MOUNT BLACK Includes 60 mths manufacturer warranty - excluded from any additional cover provided by 4 YEAR TOTAL CARE PACKAGE
DMNVX350	1.00	CRESTRON DM 4K60 4:4:4 HDR NETWORK AV ENCODE/DEC Includes 60 mths manufacturer warranty - excluded from any additional cover provided by 4 YEAR TOTAL CARE PACKAGE

**Room 7 - G.04 Foyer****Equipment**

V11H733953	2.00	EPSON 8000ANSI WUXGA LASER EB-1300UNL NO LENS Includes 60 mths manufacturer warranty - excluded from any additional cover provided by 4 YEAR TOTAL CARE PACKAGE
V12H004M08	2.00	EPSON LENS MIDDLE THROW ZOOM ELPLM08 Includes 12 mths manufacturer warranty - excluded from any additional cover provided by 4 YEAR TOTAL CARE PACKAGE
DMNVX350	2.00	CRESTRON DM 4K60 4:4:4 HDR NETWORK AV ENCODE/DEC Includes 60 mths manufacturer warranty - excluded from any additional cover provided by 4 YEAR TOTAL CARE PACKAGE

**Services**

MISC	1.00	CUSTOM BRACKET / WITH DAMPENING X 2 excluded from any additional cover provided by 4 YEAR TOTAL CARE PACKAGE
------	------	---

**Room 8 - Tuckshop****Equipment**

43LV340C	3.00	LG 43" DIRECT LED FHD INTEGRATE TUNER STAND Includes 36 mths manufacturer warranty with additional 12 mths provided by 4 YEAR TOTAL CARE PACKAGE
943AB	3.00	REVTEK BRACKET TILT 37-65" LCD/PLASMA 60KGS BLACK Includes 12 mths manufacturer warranty - excluded from any additional cover provided by 4 YEAR TOTAL CARE PACKAGE
DMNVX350	3.00	CRESTRON DM 4K60 4:4:4 HDR NETWORK AV ENCODE/DEC Includes 60 mths manufacturer warranty - excluded from any additional cover provided by 4 YEAR TOTAL CARE PACKAGE

**Services**

OFE	1.00	*VIDEOPRO ARE PROVIDING 3 X OPEN HDMI FEED FOR SCHOOL PC/NUC **COLLEGE TO PROVIDE PC/NUC ONCE DECIDED ON
-----	------	--

**Room 9 - Marketing****Services**

OFE	1.00	*VIDEOPRO ARE PROVIDING 2 X OPEN HDMI FEED FOR MARKETING **COLLEGE TO PROVIDE 2 X PC/NUC ONCE DECIDED ON
-----	------	--

**Room 10 - Studio****Equipment**

DMNVX350	1.00	CRESTRON DM 4K60 4:4:4 HDR NETWORK AV ENCODE/DEC Includes 60 mths manufacturer warranty - excluded from any additional cover provided by 4 YEAR TOTAL CARE PACKAGE
----------	------	--

**Services**

OFE	1.00	*VIDEOPRO ARE PROVIDING OPEN HDMI FEED FOR STUDIO SOURCE **COLLEGE TO PROVIDE STUDIO DEVICE
-----	------	---

**Room 11 - Streaming Service****Services**

OFE	1.00	*VIDEOPRO ARE PROVIDING OPEN HDMI FEED FOR STREAMING **COLLEGE TO PROVIDE STREAMING DEVICE ONCE DECIDED ON
-----	------	---

**Room 12 - Rack****Equipment**

RT1UPR8B	1.00	REVTEK POWERRAIL 8WAY RECESSED 1RU TUL-AUS(10) Includes 12 mths manufacturer warranty - excluded from any additional cover provided by 4 YEAR TOTAL CARE PACKAGE
DMPUB300GNK	1.00	PANASONIC BLURAY PLAYER 4K UHD Includes 12 mths manufacturer warranty with additional 36 mths provided by 4 YEAR TOTAL CARE PACKAGE
SRT5434	1.00	STRONG DIGITAL SET TOP BOX HD USB Includes 12 mths manufacturer warranty with additional 36 mths provided by 4 YEAR TOTAL CARE PACKAGE
AV3	1.00	CRESTRON CONTROL SYSTEM AV3 3 SERIES Includes 60 mths manufacturer warranty - excluded from any additional cover provided by 4 YEAR TOTAL CARE PACKAGE

DMNVX350	2.00	CRESTRON DM 4K60 4:4:4 HDR NETWORK AV ENCODE/DEC Includes 60 mths manufacturer warranty - excluded from any additional cover provided by 4 YEAR TOTAL CARE PACKAGE
DMNVX350C	16.00	CRESTRON DM 4K ENCODER DECODER CARD Includes 60 mths manufacturer warranty - excluded from any additional cover provided by 4 YEAR TOTAL CARE PACKAGE
SG50052P	1.00	CISCO SG500-52P 52-PORT GIGABIT POE MANAGED SWITCH Includes 12 mths manufacturer warranty - excluded from any additional cover provided by 4 YEAR TOTAL CARE PACKAGE
DMFCI8	2.00	CRESTRON DIGITALMEDIA CARD CHASSIS 8 SLOTS Includes 60 mths manufacturer warranty - excluded from any additional cover provided by 4 YEAR TOTAL CARE PACKAGE

#### Room 13 - Services

##### Services

FREIGHT	1.00	FREIGHT - excluded from any additional cover provided by 4 YEAR TOTAL CARE PACKAGE
INSTALL	1.00	INSTALLATION SERVICES - excluded from any additional cover provided by 4 YEAR TOTAL CARE PACKAGE
INSTALL	1.00	ROUGH-IN - excluded from any additional cover provided by 4 YEAR TOTAL CARE PACKAGE
PROJECT	1.00	PROJECT MANAGEMENT - excluded from any additional cover provided by 4 YEAR TOTAL CARE PACKAGE
INSTALL	1.00	TESTING AND COMMISSIONING - excluded from any additional cover provided by 4 YEAR TOTAL CARE PACKAGE
PROGRAM	1.00	PROGRAMMING SERVICES Includes 12 mths manufacturer warranty - excluded from any additional cover provided by 4 YEAR TOTAL CARE PACKAGE
DESIGN	1.00	DESIGN & DOCUMENTATION - excluded from any additional cover provided by 4 YEAR TOTAL CARE PACKAGE

#### Room 14 - iPads Control

##### Equipment

MR7F2XA	2.00	APPLE IPAD WI-FI 32GB SPACE GREY (6TH GEN) Includes 12 mths manufacturer warranty - excluded from any additional cover provided by 4 YEAR TOTAL CARE PACKAGE
---------	------	---

##### Services

MISC	1.00	CRESTRON CONTROL APP MUST BE PURCHASED BY CLIENT ON A SCHOOL ACCOUNT (APPROX COST \$150 PER LICENSE) - excluded from any additional cover provided by 4 YEAR TOTAL CARE PACKAGE
------	------	--

#### Room 15 - Back-Up Products

##### Equipment

43LV340C	2.00	LG 43" DIRECT LED FHD INTEGRATE TUNER STAND Includes 36 mths manufacturer warranty with additional 12 mths provided by 4 YEAR TOTAL CARE PACKAGE
SBWD960A	1.00	ACTIONTEC SCREENBEAM 960 WIRELESS DISPLAY RECEIVER Includes 24 mths manufacturer warranty with additional 24 mths provided by 4 YEAR TOTAL CARE PACKAGE
DMNVX350	2.00	CRESTRON DM 4K60 4:4:4 HDR NETWORK AV ENCODE/DEC Includes 60 mths manufacturer warranty - excluded from any additional cover provided by 4 YEAR TOTAL CARE PACKAGE