

1019

MODLINK TUBE



SPECIFICATIONS:

1.5 kg	CRI 82+ 3K and 4K	CRI 70+ 5K	Class I	IP44	CE	5 Year warranty	Made in Australia
--------	----------------------	---------------	---------	------	----	--------------------	-------------------

CONSTRUCTION & DESIGN

- Suspended tube LED luminaire
- Constructed in aluminium and finished in durable polyester powdercoat paint
- Deep recessed conical trim reflector with brilliant optical control gives a very high lumen output with ultra low glare
- Conical trim available in various finishes
- Clear tempered glass provides IP44 protection
- Supplied with 1.2M cable and back plate. Height can be adjustable on site
- Cable colour is white or black to match housing
- Cable supplied for DIM DALI, DSI, AD, is five core and transparent clear in colour
- Suspended or surface mount

OPTICAL & THERMAL PERFORMANCE

- Optics and efficient heatsink provides premium optical and thermal performance
- Efficient optical control in various beam angles with no harsh cut off and ultra low glare

ELECTRICAL SYSTEM




- Supplied standard with an integral leading and trailing edge mains dimmable driver and terminal block, also compatible with a range of dimming systems
- Optional with a range of dimming drivers such as DALI, DSI, AD supplied as integral drivers
- Power factor > 0.9 with active power factor correction
- Input voltage 220-240V, 50/60 Hz

TECHNICAL PERFORMANCE

- 13W, 22W or 28W total system power consumption with overload and short circuit protection
- >65,000 hours lifespan (L70)
- Premium quality LED Module with high lumen output per watt
- Chromaticity tolerance (MacAdam step) - 2
- Available in 3K, 4K or 5K colour temperature with very low colour shift over time

CODE ORDERING GUIDE: PRODUCT CODE - COLOUR CODE / TRIM CODE / DIM CODE


Example: 1019-SP-3K-13W-03/01 or 1019-SP-3K-13W-03/01/DALI

SYSTEM POWER	COLOUR TEMP.	 24° SP	 36° FL	 55° VWFL	HOT LED LUMENS	LUMINAIRE LUMEN OUTPUT		
		PRODUCT CODE				SP	FL	VWFL
13W	3K	1019-SP-3K-13W	1019-FL-3K-13W	1019-VWFL-3K-13W	1519	1158	1144	1167
	4K	1019-SP-4K-13W	1019-FL-4K-13W	1019-VWFL-4K-13W	1607	1219	1204	1228
	5K	1019-SP-5K-13W	1019-FL-5K-13W	1019-VWFL-5K-13W	1568	1193	1178	1202
22W	3K	1019-SP-3K-22W	1019-FL-3K-22W	1019-VWFL-3K-22W	2414	1826	1810	1838
	4K	1019-SP-4K-22W	1019-FL-4K-22W	1019-VWFL-4K-22W	2584	1922	1905	1934
	5K	1019-SP-5K-22W	1019-FL-5K-22W	1019-VWFL-5K-22W	2520	1881	1864	1893
28W	3K	1019-SP-3K-28W	1019-FL-3K-28W	1019-VWFL-3K-28W	3271	2464	2442	2480
	4K	1019-SP-4K-28W	1019-FL-4K-28W	1019-VWFL-4K-28W	3443	2594	2571	2610
	5K	1019-SP-5K-28W	1019-FL-5K-28W	1019-VWFL-5K-28W	3371	2540	2518	2557

DIM CODE		13W	22W	28W
/DALI	Dali Dimming / Switch Dim	✓	✓	✓
/DSI	Digital Dimming	✓	✓	✓
/AD	Analogue Dimming 1-10V	✓	✓	✓
	Leading & Trailing edge	Std	Std	Std

COLOUR CODE		
-03		Texture White
-07		Texture Black

TRIM CODE		
/01		Satin White
/06		Matte Black
/13		Anodised Silver
/26		Anodised Gold
/30		Specular Aluminium

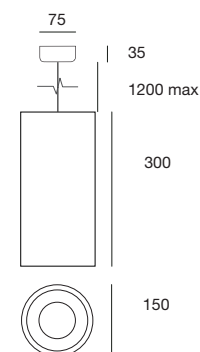

*Custom body lengths available on request

TRIM COLOUR OPTIONS

