



GAP55045-S

GAP55045-S

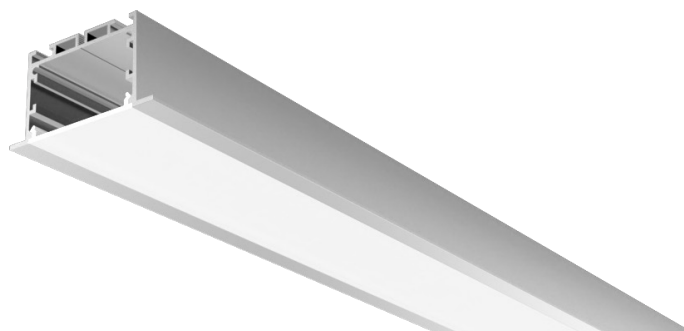

SPECIFICATIONS:



CONSTRUCTION & DESIGN

- Recessed natural anodised aluminium extrusion
- High quality opal matte UV resistant diffuser
- Supplied as standard in 1m length. Also optional customised length (cutting increments of 50mm)
- For indoor use only




ELECTRICAL SYSTEM


- Input Voltage 12V or 24V DC
- Connects to remote 12V or 24V DC power supply, to be ordered separately
- Supplied with 2 Core input cable
- Parallel connection

TECHNICAL PERFORMANCE

- 4.8W, 7.2W, 9.6W, 14.4W or 19.2W LED power consumption per metre
- >65,000 hours lifespan (L70)
- Chromaticity tolerance (MacAdam step)-2
- Available in 3.2K or 4.2K color temperature. Other colour temperatures or CRI available on request
- Maximum run of 5 metres per driver

DIMENSION

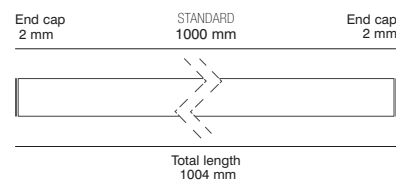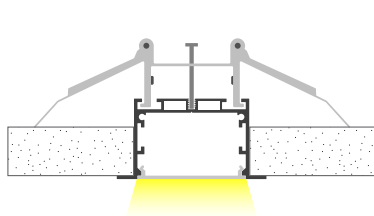

STANDARD ACCESSORIES	OPTIONAL ACCESSORIES
End caps	Adjustable Mounting Bracket
	N/A

COLOUR CODE

-03		Textured White
-07		Textured Black