



## QUARTER SE7146 - 16W

IP65 LED architectural wall luminaire IK07

### Application

A decorative residential exterior or interior solution

### Design Specifications





- Die-cast aluminium body and powder coated body profile
- Clear tempered glass cover
- High efficiency LED optics
- High performance multifaceted reflector system
- Integral constant current non-dimmable LED driver
- Installation orientation, face down only

### Performance

- Dimmable - **NO**



### Technical Specification


Product	Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI
	SE7146WW/BK	240	16	1150	3000	80
	SE7146WW/CB	240	16	1150	3000	80
	SE7146CW/BK	240	16	1200	4000	80
	SE7146CW/CB	240	16	1200	4000	80

Beam Angle (°)	Mass (kg)	Dim (mm)	Body Colour
25	2.93	160(L) x 151(W) x 186(H)	BLACK
25	2.93	160(L) x 151(W) x 186(H)	CHARCOAL BLACK
25	2.93	160(L) x 151(W) x 186(H)	BLACK
25	2.93	160(L) x 151(W) x 186(H)	CHARCOAL BLACK

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

## Dimensions

### SE7146

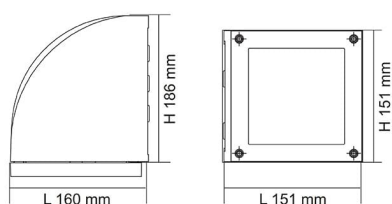

## Photometric Data

Unit: cd C0/C180 — C90/C270 —

### SE7146WW at 3000K

