



## 7W, 24VDC LED STRIP LIGHT

### R23333

- IP20
- 3000k / 4000k / 5000k
- Custom Lengths Available
- Premium Close Diode LED's



1. Please choose the correct power supply for LED strips. The total power of the LED strip is about 80% of the power supply, and it cannot be fully loaded to ensure that the power supply works at the correct and stable voltage.
2. We suggest 5 meters/roll maximum for the LED strip powered from one end. If it is over 5 meters length, the brightness of LED could vary. If exceeding 5 meters it is recommended to power the LED strip from both ends. Custom lengths can be supplied if necessary.
3. The LED strip has adhesive tape on the back side of the strip. With its superior adhesive and weather resistance it can be connected to any aluminium or flat bar extrusion to ensure longevity of the LED strip. On some certain surfaces, such as cloth or wood, function and durability of the LED strip will be affected. Please test the adhesion of the led strip before installation.
4. Pay special attention to the 60mm minimum bending diameter of the LED strip to avoid direct or indirect damage to FPC and components on FPC which may lead to damages of the LED strip.
5. In order to ensure waterproof and anti-corrosive function, after the power line is screwed into the connector, it is recommended to inject the connector with a single component of silica gel (or neutral glass glue, or waterproof grease) and cover the exposed copper wire of the power line for protection
6. The non-waterproof LED strip should not be completely exposed for outdoor use. Do not touch or install the strip when it is charged.



## PRODUCT SPECIFICATIONS

<b>Wattage</b>	7W
<b>Colour Temperature</b>	3000K - WW, 4000K - CW, 5000K - DL
<b>Lumen Output</b>	600 - 650Lm
<b>Lumen Output / W</b>	90Lm / W
<b>Beam Angle°</b>	120°
<b>IP Rating</b>	IP20
<b>Dimmable</b>	Yes - With Suitable Driver
<b>LED Type</b>	Refond Optoelectronic
<b>LM80</b>	L70 >54,000Hrs
<b>SDCM</b>	<3
<b>Voltage</b>	24VDC



<b>Cut Point</b>	25mm
<b>LED p/mtr</b>	240
<b>Product Dimensions</b>	8mm (W) x 1mm (H)
<b>Length</b>	2M, 4M, 6M, 10M, 15M
<b>Compatible Drivers</b>	24V-IP20-020W-DIM 24V-IP20-030W-DIM 24V-IP20-060W-DIM 24V-IP20-080W-DIM 24V-IP20-100W-DIM 24V-IP67-020W-DIM 24V-IP67-040W-DIM 24V-IP67-060W-DIM 24V-IP67-100W-DIM 24V-IP67-150W-DIM 24V-IP67-200W 24V-IP67-200W-DIM 24V-IP67-300W 24V-IP67-300W-DIM
<b>Warranty</b>	5 Years (2 Years Replacement & Labour / 3 Years Replacement Only)



## ALUMINIUM EXTRUSION

### R2384

- 17mm x 9mm
- Shallow Surface Mount
- Aluminium, Black or White
- Black or Opal Diffuser
- 3M Lengths Available for Collection

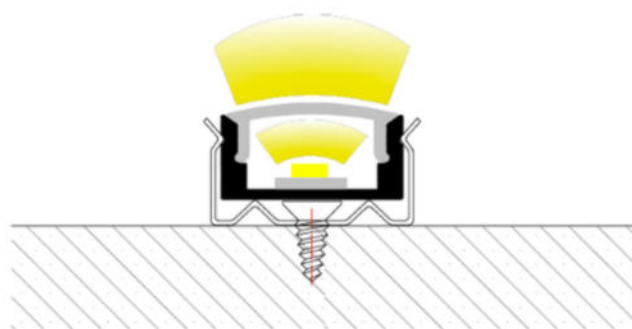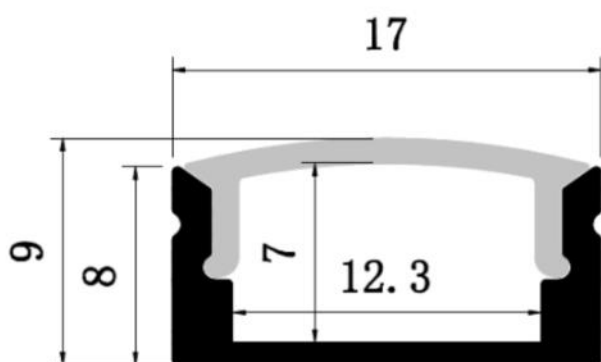



## PRODUCT SPECIFICATIONS

IP Rating	IP20
Fixture Colour	Aluminium, Black, White
Diffuser Colour	Opal, Black (Black 2M Only)
Length	1M, 2M, 3M
Product Dimensions	17mm (W) x 9mm (H)

Recommended Fixing Points	3 per metre
Additional Options	3 metre lengths available for collection
Mounting	Shallow Surface Mount
Warranty	5 Years ( 2 Year Replacement & Labour / 3 Year Replacement Only )