




RAPTOR-LRG


QUAD WATTAGE ANTI-CORROSION LED COMMERCIAL STREET LIGHT - IP66

R3240-LRG


- Wattage Selectable (120W / 90W / 60W / 36W)
- Dual Colour (3000K / 4000K)
- 115Lm / W
- Electrophoresis with Strong Anti-Corrosion Resistance




R17601




R17602




R17603




R17604



R17605



R17613



R17614



Side entry mounting






Post top mounting



Wall mounting



Corner mounting

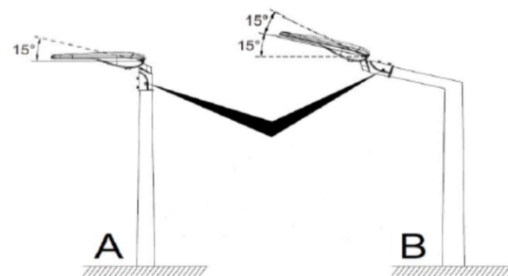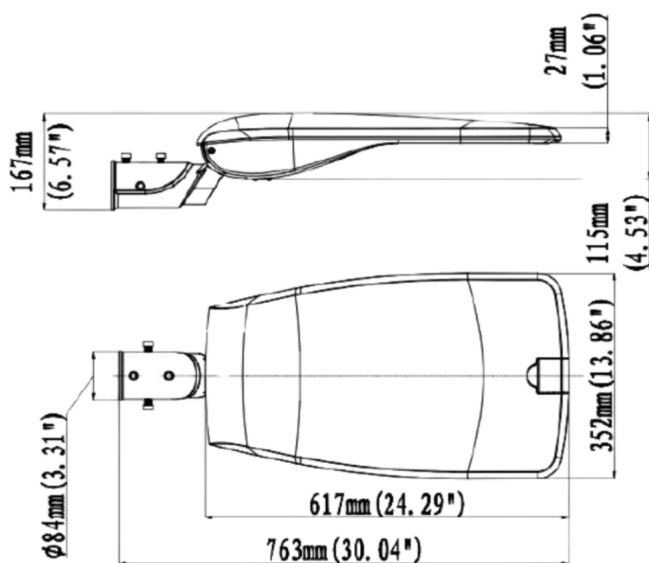

±15° tilt adjustable

PRODUCT SPECIFICATIONS

Wattage	Quad Wattage Selectable (120W / 90W / 60W / 36W)
Colour Temperature	DUAL (3000K / 4000K)
Lumen Output	36W - 30% : 4,200Lm 60W - 50% : 7,000Lm 90W - 75% : 10,500Lm 120W - 100% : 14,000Lm
Lumen Output / W	115Lm / W
CRI	>80
Beam Angle	See Photometry (R17601 - Standard, R17602, R17603, R17604, R17605, R17613, R17614)
Dimmable	No
Fixture Colour	Black
IP Rating	IP66
IK Rating	IK08
LED Type	3030 SMD
Lifetime Expectancy	>200,000Hrs
SDCM	<5
Power Supply	Sosen - Constant Current
Power Factor	>0.95
Voltage	220 - 240V AC
Frequency	50 - 60Hz
Working Temperature	-30°C~+ 50°C
Surge Protection	6kV line-line, 12kV line-earth

Sea Salt Spray Test	1000Hrs
Photobiosafety Test	IEC / EN62471 Safety of Lamps and Lamp Systems
3G Vibration Test	ANSI C136.31 Earthquake and Vibration Resistant
Fitting Protection Classification	Class I
Spigot Size	60mm, 76mm
Product Dimensions	763mm (L) × 352mm (D) × 167mm (H)
Product Materials	Housing: Coastal Coated Aluminium Alloy Optics: Tempered Glass & Polycarbonate Lens
Mounting Options	Included - 60mm / 76mm Spigot (Adjustable Angle)
NEMA Socket Compatibility	3 Pin 5 Pin 7 Pin
Intelligent Control	Optional Dali Control
Accessory Options	Wall Mount Bracket NEMA Socket : 3 Pin / 5 Pin / 7 Pin Photocell Shorting Cap
Warranty	5 Years (2 Years Replacement & Labour / 3 Years Replacement Only)
Standards	AS/NZS 60598.1 AS/NZS 60598.2.3 AS CISPR 15