





ORBIT-200

MULTI WATTAGE DUAL CCT HI EFFICIENCY LED HI-BAY

R3118

- Wattage Selectable (200W - 120W)
- 160Lm / W
- Dual CCT

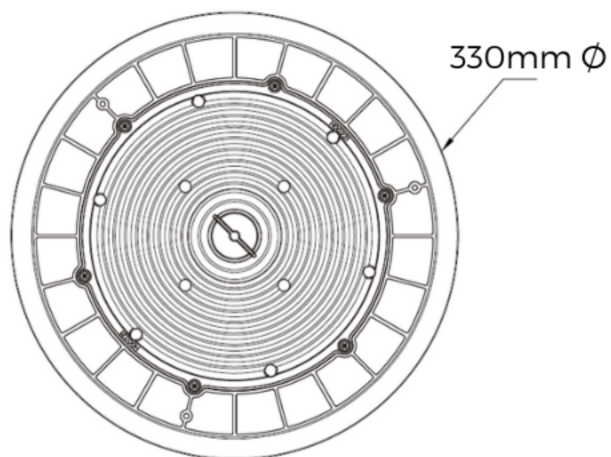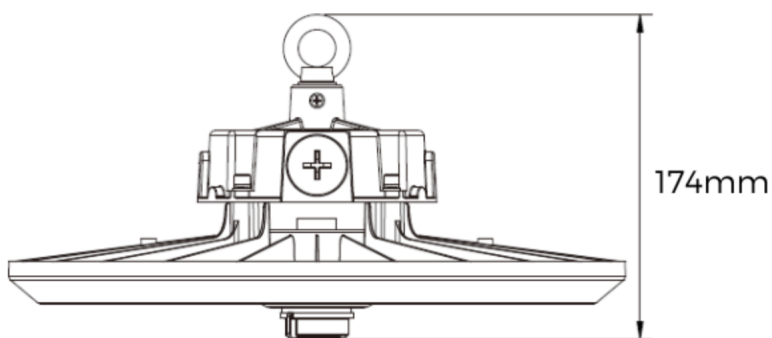

PRODUCT SPECIFICATIONS

Wattage	Wattage Selectable (200W / 160W / 120W)
Colour Temperature	DUAL (4000K / 5000K)
Lumen Output	120W - 60% : 18,500Lm - 19,200Lm 160W - 80% : 24,500 - 25,600Lm 200W - 100% : 30,700Lm - 32,000Lm
Lumen Output / W	160Lm / W
CRI	>80
Fixture Colour	Black
Beam Angle°	115°
Dimmable	Yes - 0-10v Dimmable
IP Rating	IP65
IK Rating	IK08
LED Type	SMD 2835
SDCM	<5
Lifetime Expectancy	L80/B10 >60,000Hrs
Power Supply	Sosen Class I Constant Current Driver
Power Factor	>0.95
Voltage	220 - 240V AC
Frequency	50 - 60Hz
PstLM	<= 1.0
SVM	<= 0.4

Working Temperature	-30°C ~+ 50°C
Product Dimensions	174mm (H) x 330mm Ø
Product Materials	Housing - Powder Coated Aluminium Alloy Optics - Polycarbonate Cover
Fitting Protection Classification	Class I
Intelligent Control	Zhaga Microwave Sensor Casambi Module Indent Only - PIR Sensor / DALI
Additional Product Options	R3148-MS : Microwave Sensor R3148-CAS : Casambi Module R3148-REMOTE : Remote to suit Sensor R3118-REFLECTOR-AL : Aluminium Reflector R3118-REFLECTOR-PC : PC Reflector with Lid R3145 : ±30° Adjustable Mounting Bracket
Mounting Options	Suspension Mount - Loop Hanging
Included	1500mm Flex & Plug
Net Weight	2.3±0.3kg
Warranty	5 Years (2 Years Replacement & Labour / 3 Years Replacement Only)
Standards	AS/NZS 60598.1 AS/NZS 60598.2.1 AS/NZS 61347.1 AS/NZS 61347.2.13 AS CISPR 15