





MANLY

ARCHITECTURAL PIN HOLE DIMMABLE LED DOWNLIGHT

R1078

- 6w / 9w / 12w / 15w
- 2700k / 3000k / 4000k
- White Trim
- 90mm Cutout

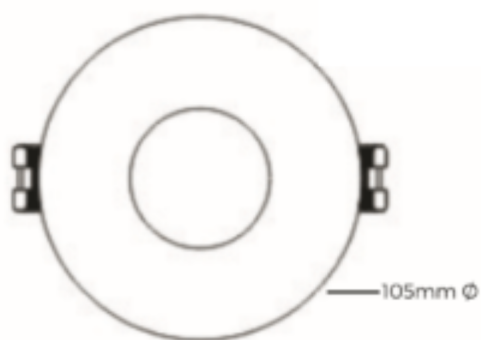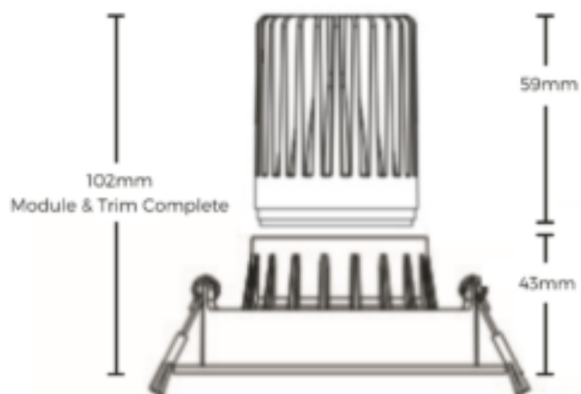

PRODUCT SPECIFICATIONS

| | |
|---------------------------|--|
| Wattage | 6W, 9W, 12W, 15W |
| Colour Temperature | 2700K - XW, 3000K - WW, 4000K - CW |
| Lumen Output | 6W : 600 - 710Lm 9W : 750 - 860Lm 12W : 1,030 - 1,230Lm 15W : 1,230 - 1,380Lm |
| Lumen Output / W | 76 - 98Lm / W |
| CRI | >90 |
| Beam Angle° | 24°, 60° |
| Fixture Colour | White |
| IP Rating | IP54 |
| IC4 Rated | Yes |
| Dimmable | Yes |
| LED Type | CREE COB LED |
| SDCM | <3 |
| UGR | <16 |
| LM80 | L70 >54,000Hrs |
| Power Supply | Remote Class II Flicker Free Driver |
| Power Factor | 0.90 |
| Voltage | 200 - 240V AC |
| Frequency | 50 - 60Hz |

| | |
|--|---|
| Working Temperature | -20°C ~+ 50°C |
| Cutout | 90mm |
| Product Dimensions | 6W / 9W / 12W : 102mm (H) x 105mm Ø 15W : 125mm (H) x 105mm Ø |
| Product Materials | Trim : Powder Coated Aluminium Module : Die-Cast Aluminium |
| Fitting Protection Classification | Class II |
| Options Available | DALI / DSI Dimming |
| Indent Options | 38° Beam Angle 6W / 9W / 15W in 2700K |
| Mounting Options | Recessed |
| Components | Fitting Supplied As Module and Downlight Head Separately |
| Recommended Application | Residential & Commercial For more information please visit the Warranty & Returns page on the Rapid LED website |
| Warranty | 5 Years (2 Years Replacement & Labour / 3 Years Replacement Only) |
| Standards | AS/NZS 60598.1 AS/NZS 60598.2.2 AS/NZS 61347.1 AS/NZS 61347.2.13 AS CISPR 15 |