
















LEGEND

-  ELECTRICAL SERVICES SWITCHBOARD.
-  SWITCHBOARD / CONTROL PANEL NOT PROVIDED AS PART OF THE ELECTRICAL SUBCONTRACT.
-  SINGLE POWER OUTLET.
-  DOUBLE POWER OUTLET.
-  SPECIAL PURPOSE OUTLET.
-  ELECTRICAL CONNECTION AS NOTED.
-  SIGNAGE CONNECTION.
-  SINGLE PHASE ISOLATOR.
-  THREE PHASE ISOLATOR.
-  CEILING FAN CONTROLLER.
-  LIGHTING CONTROL SWITCHPANEL, TYPE x.
-  ONE-WAY LIGHT SWITCH.
-  MANUAL DALI POT DIMMER / SWITCH.
-  CIRCUIT LINE.
-  SWITCH LINE.
- DB-x - Py

POWER CIRCUIT DESIGNATION.
DENOTES DB AND CIRCUIT.
- xx

LIGHTING CONTROL CHANNEL REFERENCE.
- ⊗

ELECTRICAL EQUIPMENT AS NOTED.
- ▨

REFER TO DETAIL NOTED FOR THE AREA SHOWN HATCHED.
ADDITIONAL OUTLETS & FITTINGS MAY BE SHOWN ON DETAIL.
- ⊕

Sx: LED JOINERY / CEILING STRIP LIGHT, TYPE AS NOTED.
- E1

E1: GENERAL CEILING RECESSED LED EMERGENCY LIGHT, WHITE.
- E2

E2: GENERAL CEILING RECESSED LED EMERGENCY LIGHT, BLACK.
- E3

E3: SURFACE MOUNTED LED EMERGENCY LIGHT, BLACK.
- EX

EX: EMERGENCY LED EXIT LIGHT, WHITE.
- BK EX

EX BK: EMERGENCY LED EXIT LIGHT, BLACK.
- PD01

PD01: DECORATIVE SUSPENDED PENDANT.
- PD02

PD02: DECORATIVE SUSPENDED PENDANT.
- PD03

PD03: DECORATIVE SUSPENDED PENDANT.
- TL01

TL01: SURFACE TRACK LIGHTS, BLACK.
- WL01

WL01: DECORATIVE WALL LIGHT.
- WL02

WL02: DECORATIVE WALL LIGHT.
- WL03

WL03: DECORATIVE WALL LIGHT.
- WL04

WL04: DECORATIVE WALL LIGHT.
- WL05

WL05: DECORATIVE WALL LIGHT.
- WL06

WL06: DECORATIVE WALL LIGHT.
- GL01

GL01: GARDEN STAKE LIGHT.
- UL01

UL01: EXISTING INGROUND UPLIGHT TO BE REPLACED.
- UL02

UL02: EXISTING INGROUND UPLIGHT TO BE REPLACED.
- SL01

SL01: 1200 LONG SURFACE BATTEN.
- SL02

SL02: SURFACE CAN DOWNLIGHT, WHITE.

LEGEND

- RD01

RD01: RECESSED DOWNLIGHT, BLACK.
- RD02

RD02: RECESSED DOWNLIGHT, WHITE.
- RD03

RD03: RECESSED DOWNLIGHT, WHITE.
- RD04

RD04: RECESSED ADJUSTABLE DOWNLIGHT, WHITE.
- RD05

RD05: RECESSED DOWNLIGHT, WHITE.
- RD06

RD06: RECESSED DOWNLIGHT, WHITE.
- RD07

RD07: RECESSED DOWNLIGHT, WHITE.
- RD08

RD08: RECESSED DOWNLIGHT, BLACK.
- RT01

RT01: 300 x 1200 FLAT PANEL LIGHT.
- HL01

HL01: HEAT LAMP TYPE 1.
- HL02

HL02: HEAT LAMP TYPE 2.
- F01


F01: NEW 1400 DIA CEILING FAN.
- F02

F02: NEW 900 DIA CEILING FAN.
- FE

FE: EXISTING CEILING FAN.

EQUIPMENT:


- TEST - TEST PUSH BUTTON MOUNTED ON THE DISTRIBUTION BOARD ESCUTCHEON.
- RESET - RESET PUSH BUTTON MOUNTED ON THE DISTRIBUTION BOARD ESCUTCHEON.
- LAMP - AMBER TEST INDICATING LAMP MOUNTED ON THE DISTRIBUTION BOARD ESCUTCHEON.
- Ta - ADJUSTABLE 0-3 HOUR TIMED RELAY.
- Tb - 15 MINUTE RUN-ON TIMER TO OPERATE UPON THE RETURN OF MAINS POWER.
- Cx - CONTACTOR x.
- CRx - CONTROL RELAY x.
- Rx - RELAY x.

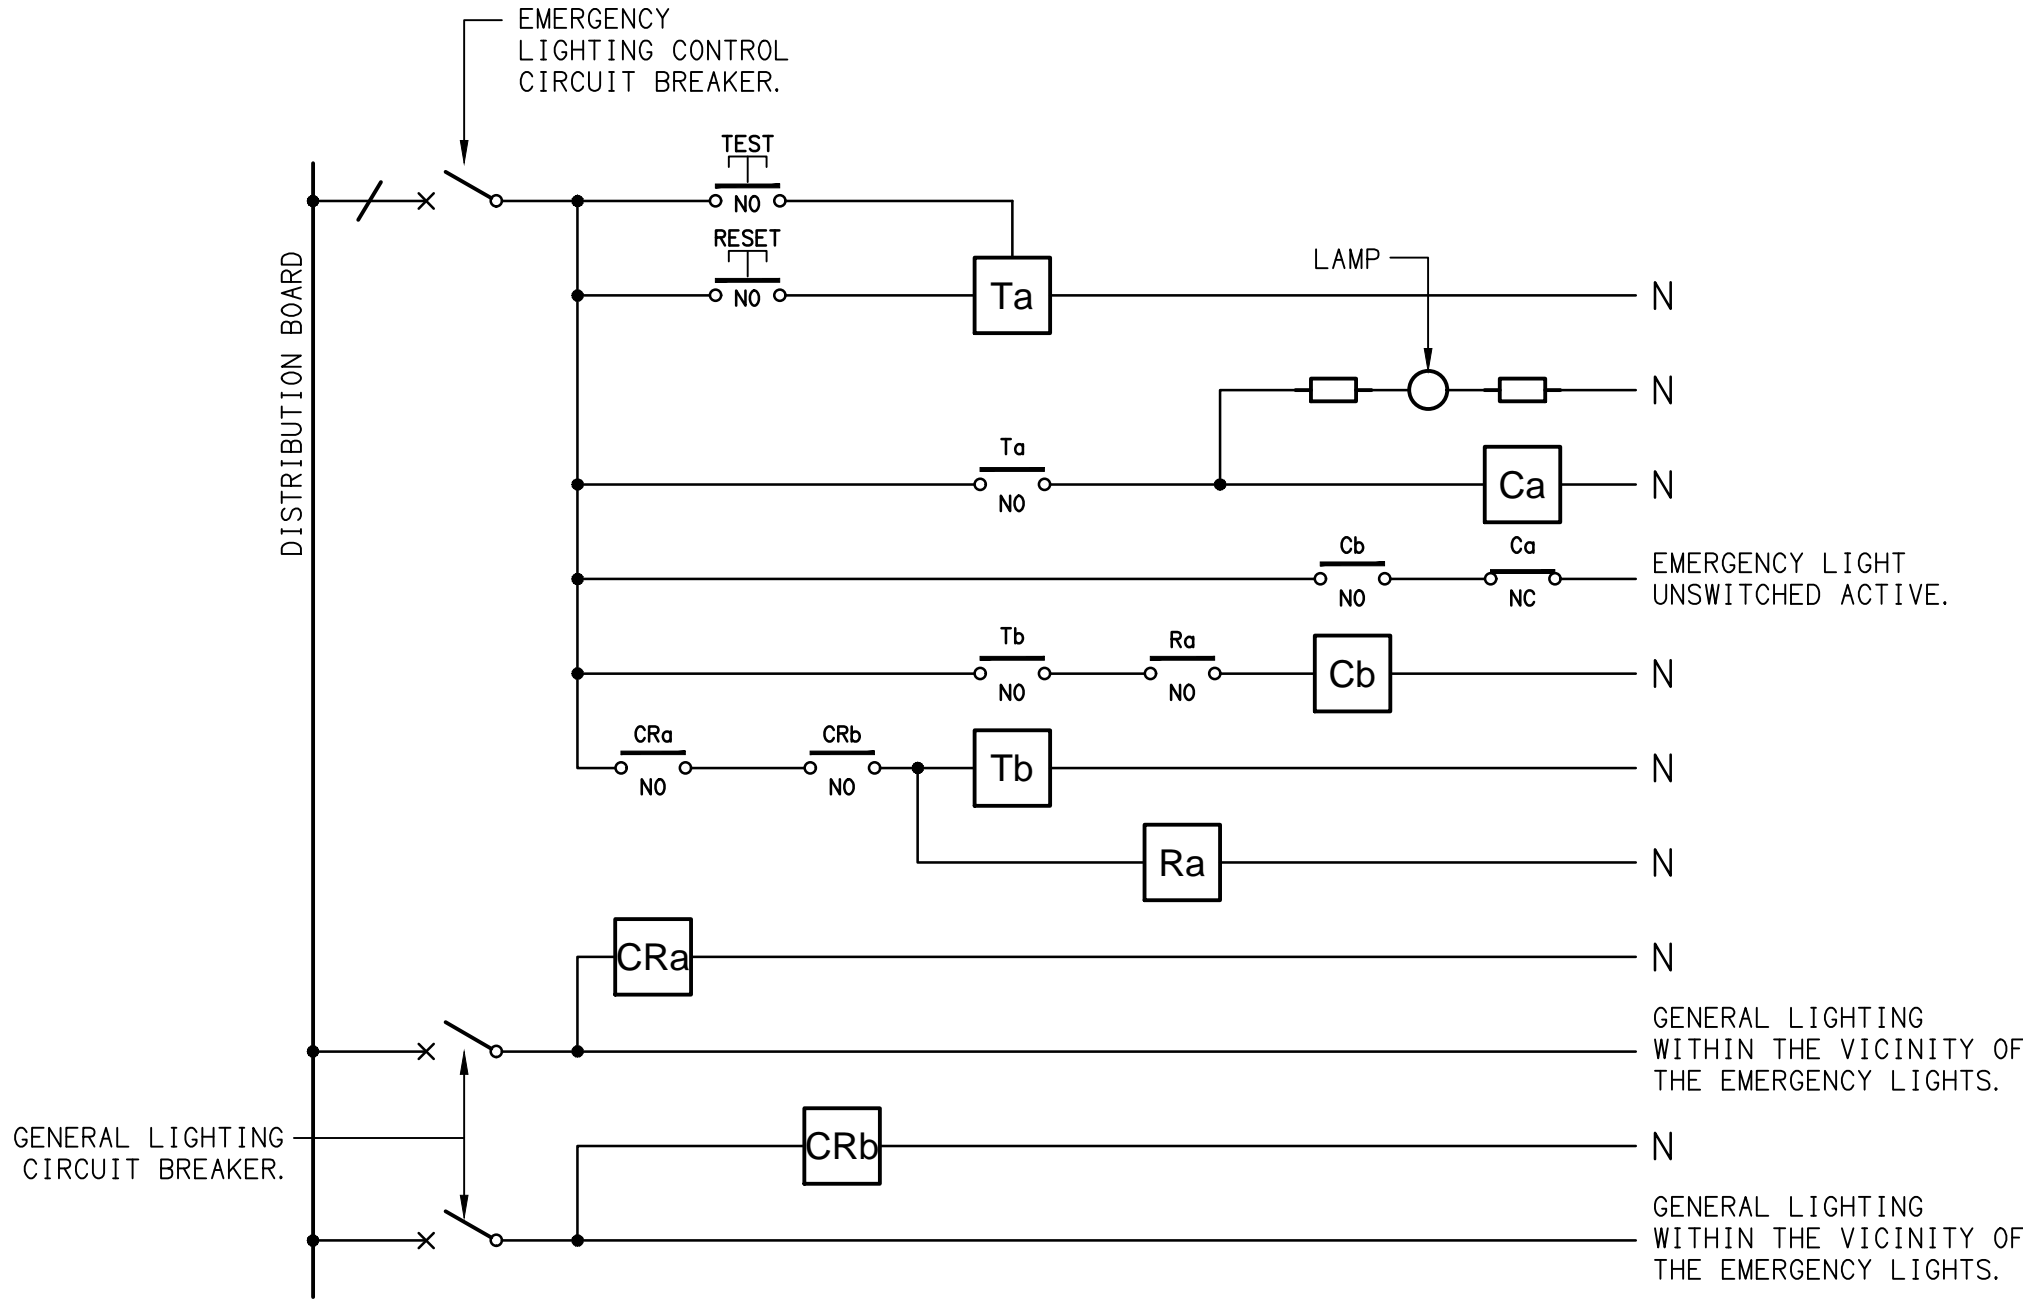

NOTES

1. THE EMERGENCY LIGHT UNSWITCHED ACTIVE / GENERAL LIGHTING SWITCHED ACTIVE CIRCUIT ARRANGEMENT AND CONTROL IS TYPICAL FOR ALL CIRCUITS SUPPLYING EMERGENCY LIGHTS.
2. PROVIDE ADDITIONAL CONTROL RELAYS (CRx) CONFIGURED AS PER CRa AND CRb FOR ALL ADDITIONAL LIGHTING CIRCUITS THAT SUPPLY LIGHTS IN THE VICINITY OF THE EMERGENCY LIGHTS.

SCHEMATIC
EMERGENCY LIGHTING
NOT TO SCALE

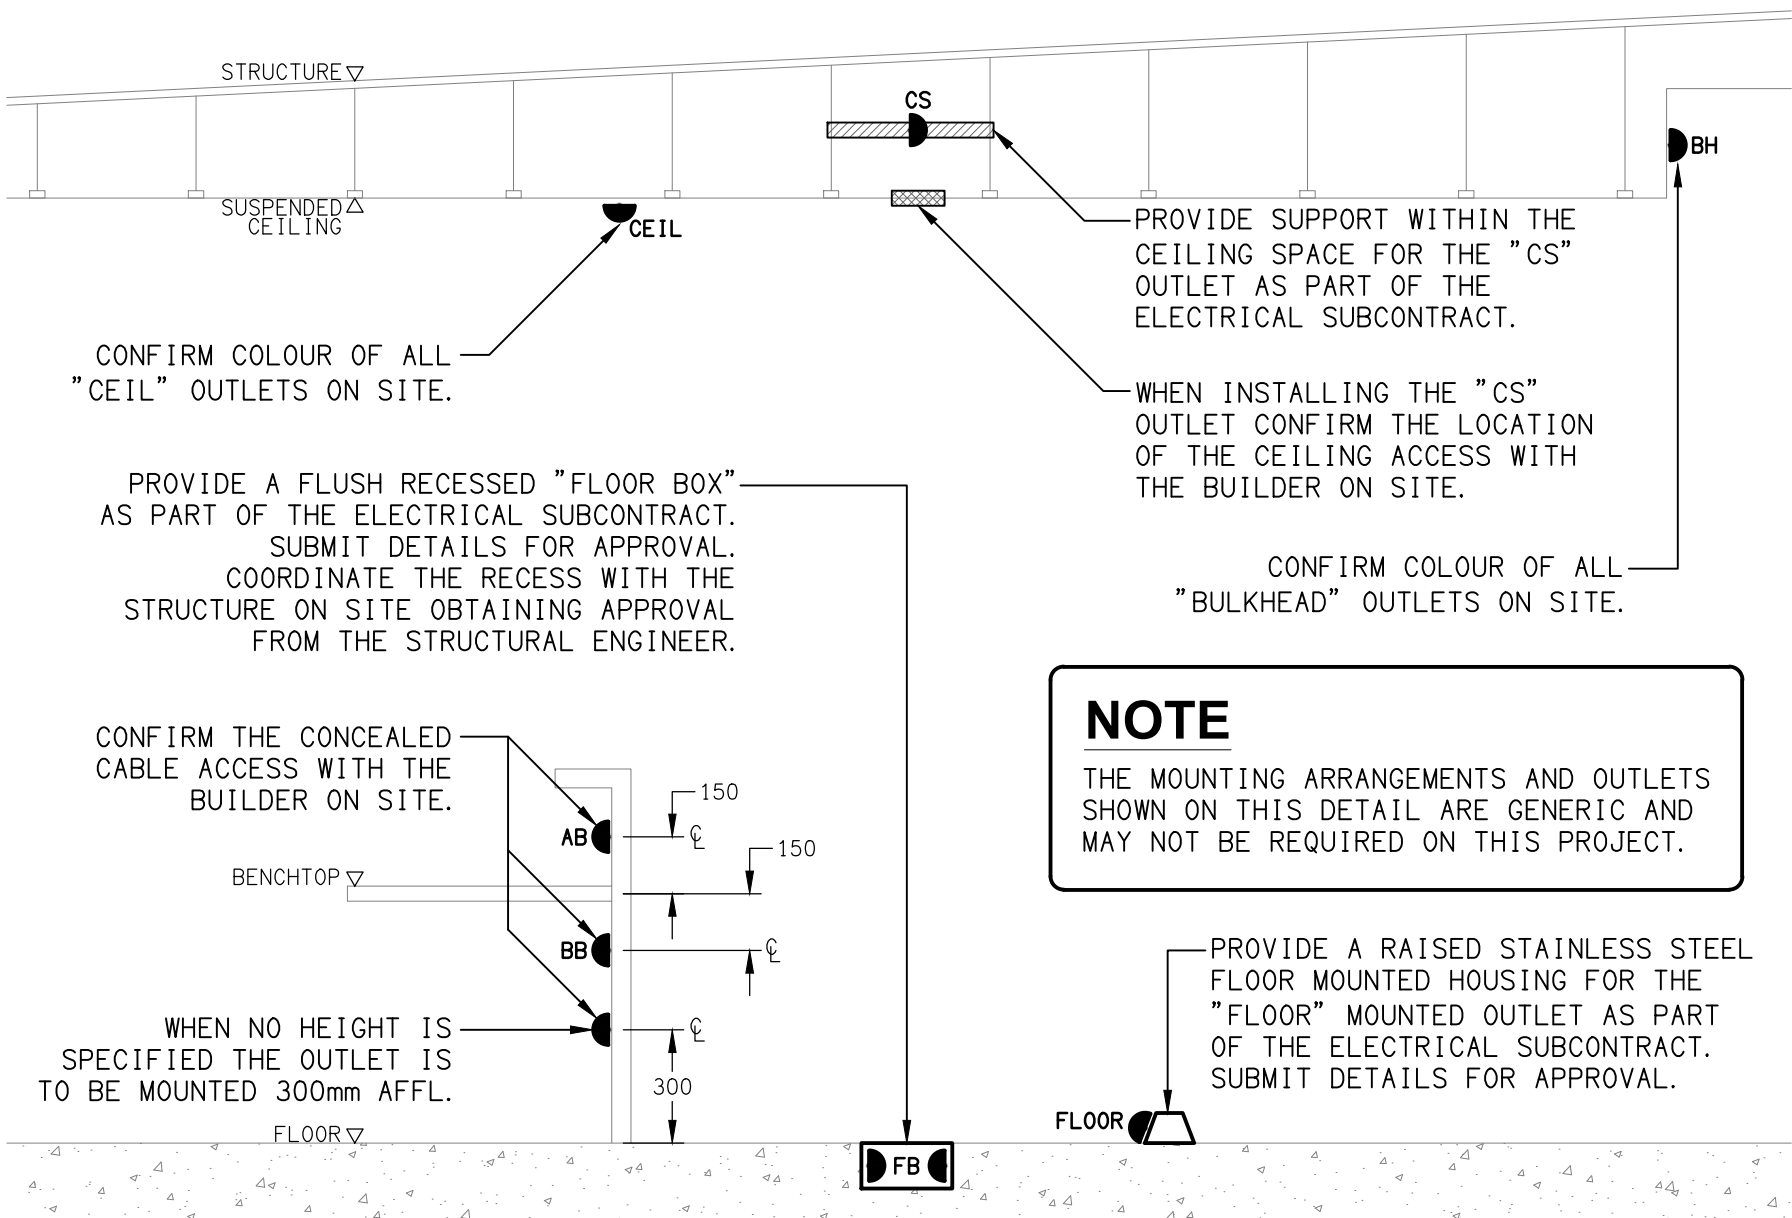

DETAIL
TYPICAL OUTLET MOUNTINGS
NOT TO SCALE